

Features

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Glass passivated chip junction
- ◆ Built-in strain relief, ideal for automated placement
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 260°C/10 seconds at terminals
- ◆ RoHS Compliant
- ◆ Halogen & Pb Free



SMA



Polarity: Color band denotes cathode end

极性：色带表示阴极端

特征

- ◆ 塑料包装，保险商实验室易燃性分类 94V-0
- ◆ 玻璃钝化结
- ◆ 内置应力消除，非常适合自动放置
- ◆ 高正向浪涌电流能力
- ◆ 可靠的高温焊接：接触端 260°C/10 秒
- ◆ 符合 RoHS 标准
- ◆ 无卤素和无铅

Device Type 器件型号	Device Marking 器件印字
US1M-TP-CN	US1M

Application 应用

- ◆ Switched Circuit 开关电路
- ◆ High frequency rectifier 高频整流
- ◆ Switching devices for high-frequency inverter devices
高频逆变装置的开关器件

ORDERING INFORMATION 订购信息

Device Type 器件型号	Package 封装	Reel Size 卷盘尺寸	SPQ 标准包装量	MPQ 最小包装数量	MOQ 最小订购数量
US1M-TP-CN	SMA	13 Inch 英寸	5000/Reel 卷	10000/Box 盒	100000/Carton 箱

Maximum Ratings ($T_A = 25^\circ\text{C}$ unless otherwise noted)

最大额定值(如无另外标识, 环境温度=25°C)

Parameter 参数	Symbol 符号	Note	US1M-TP-CN	Unit 单位
Maximum repetitive peak reverse voltage 最大重复峰值反向电压	V_{RRM}	/	1000	V
Maximum RMS Voltage 最大反向有效电压	V_{RMS}	/	700	V
Maximum DC Blocking Voltage 最大直流截止电压	V_{DC}	/	1000	V
Maximum Average Forward Rectified Current 最大正向平均整流电流	$I_{(AV)}$	/	1.0	A
Peak Forward Surge Current 峰值正向浪涌电流	I_{FSM}	JEDEC method	30	A
Maximum Instantaneous Forward Voltage @1.0A 最大瞬时正向电压@1.0A	V_F	/	1.7	V
Maximum DC Reverse Current rated DC Blocking Voltage per element 在额定直流截止电压下的 最大直流反向电流	I_R	$T_A = 25^\circ\text{C}$	5.0	μA
		$T_A = 125^\circ\text{C}$	100	
Maximum Reverse Recovery Time 反向恢复时间	t_{rr}	$I_F = 0.5\text{A}$ $I_R = 1.0\text{A}$ $I_{RR} = 0.25\text{A}$	100	nS
Operating Junction Temperature 工作结点温度	T_J	/	55 to +150	$^\circ\text{C}$
Storage Temperature Range 储存温度范围	T_{STG}	/	55 to +150	$^\circ\text{C}$
Typical thermal resistance 典型热阻	$R_{\theta JA}$	P.C.B. mounted with 0.2x0.2" (5.0x5.0mm) copper pad areas	88	$^\circ\text{C}/\text{W}$
Typical junction capacitance 典型结电容	C_j	Measured at 1MHz and applied reverse voltage of 4.0V D.C	15	pF

Characteristic diagram 特性图

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

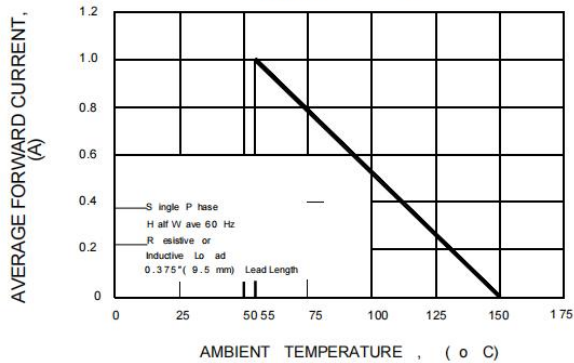


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

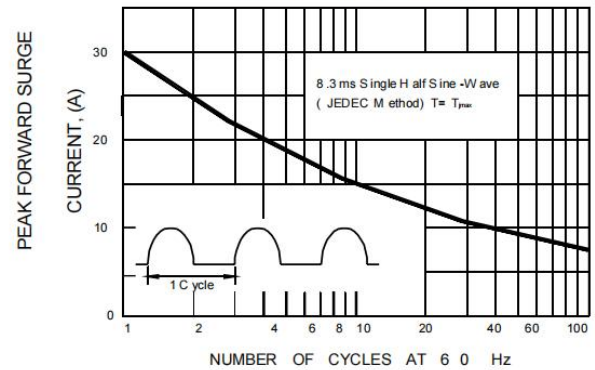


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

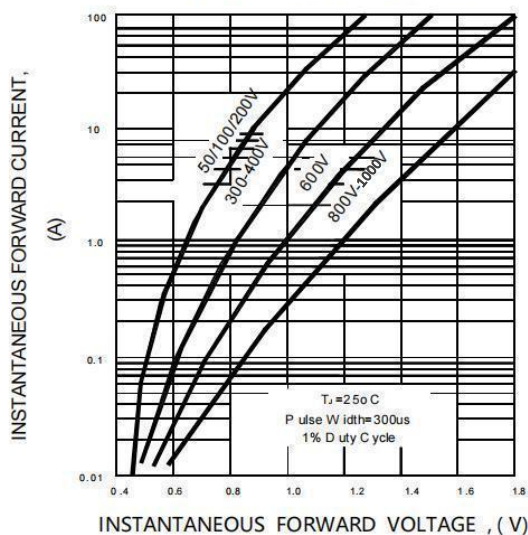


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

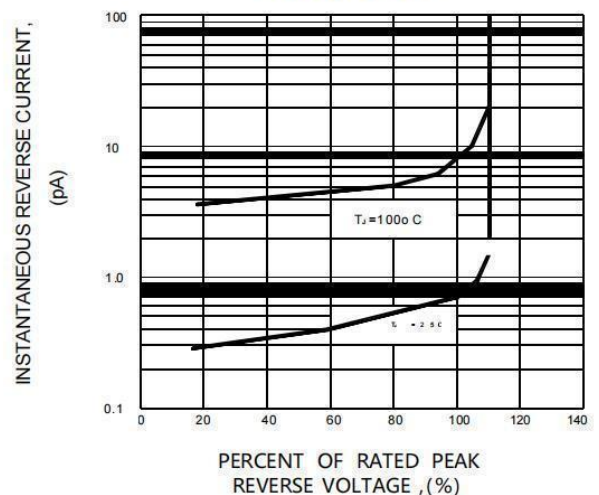


FIG. 5 - TYPICAL JUNCTION CAPACITANCE



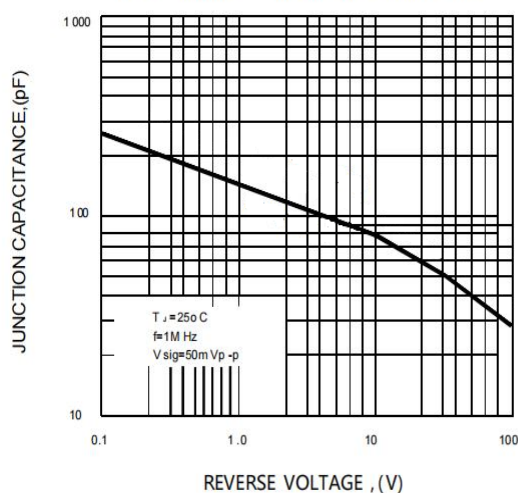


FIG. 6 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

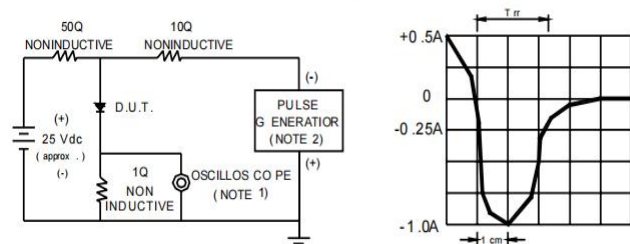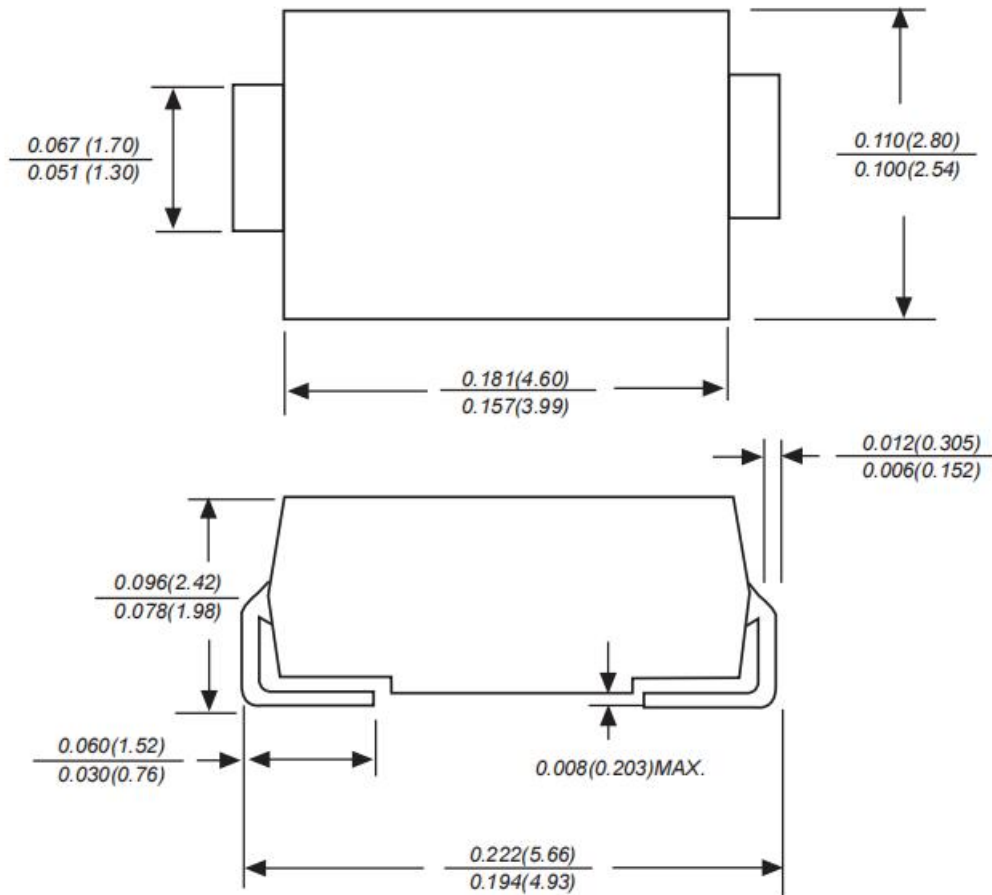

NOTES : 1 . Rise Time = 7 ns max . Input Impedance = 1 megohm . 22pF
 2 . Rise time = 10 ns max . Source Impedance = 50 ohms

SET TIME BASE FOR 50/ 100ns/cm

Package 封装信息
SMA(DO-214AC)


Dimensions in inches and (millimeters)

NOTICE

The information presented in this document is for reference only. Involving product optimization and productivity improvement, ChipNobo reserves the right to adjust product indicators and upgrade some technical parameters. ChipNobo is entitled to be exempted from liability for any delay or non-delivery of the information disclosure process that occurs.

本文件中提供的信息仅供参考。涉及产品优化和生产效率改善，ChipNobo 有权调整产品指标和部分技术参数的升级，所出现信息披露过程存在延后或者不能送达的情形，ChipNobo 有获免责权。

The product listed herein is designed to be used with residential and commercial equipment, and do not support sensitive items and specialized equipment in areas where sanctions do exist. ChipNobo Co., Ltd or anyone on its behalf, assumes no responsibility or liability for any damages resulting from improper use.

此处列出的产品旨在民用和商业设备上使用，不支持确有制裁地区的敏感项目和特殊设备，ChipNobo 有限公司或其代表，对因不当使用而造成的任何损害不承担任何责任。

For additional information, please visit our website <http://www.chipnobo.com>, or consult your nearest Chipnobo sales office for further assistance.

欲了解更多信息，请访问我们的网站 <http://www.chipnobo.com>，或咨询离您最近的 Chipnobo 销售办事处以获得进一步帮助。