

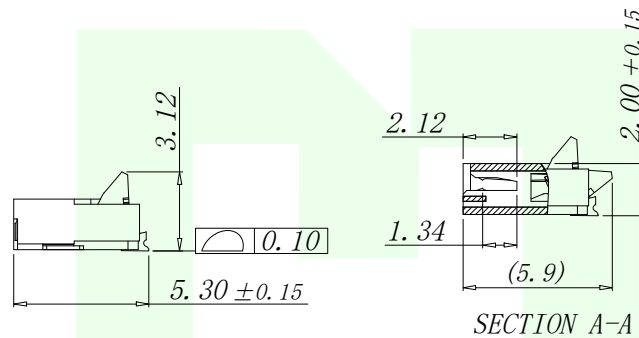
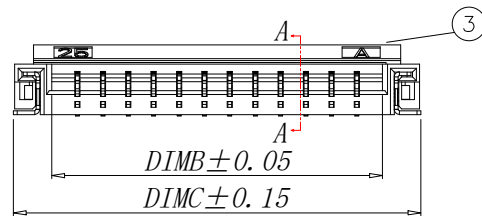
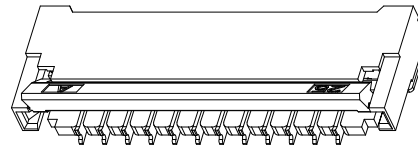
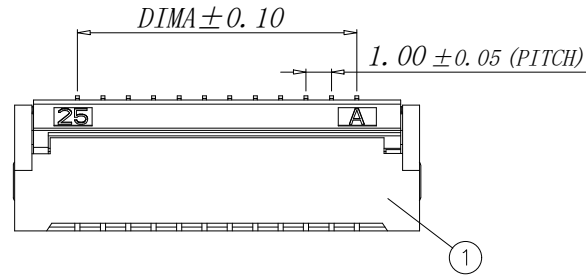
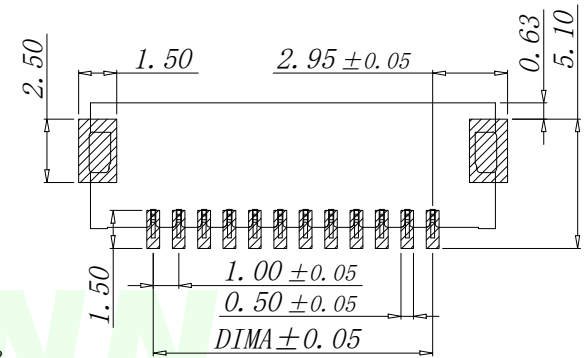


RoHs

VER	MARK	PR. BY	DESCRIPTION	DATE

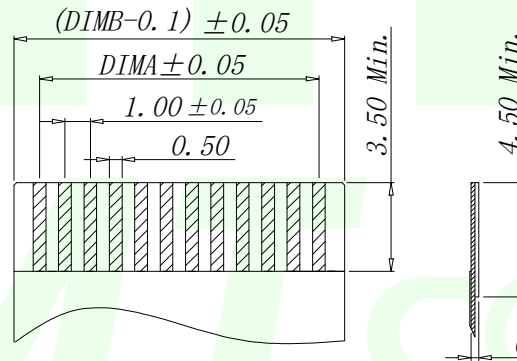

Part No	Pin	A	B	C
FPC1.0-WFB11-4P011-H20	4	3.00	5.02	8.04
FPC1.0-WFB11-5P011-H20	5	4.00	6.02	9.04
FPC1.0-WFB11-6P011-H20	6	5.00	7.02	10.04
FPC1.0-WFB11-7P011-H20	7	6.00	8.02	11.04
FPC1.0-WFB11-8P011-H20	8	7.00	9.02	12.04
FPC1.0-WFB11-9P011-H20	9	8.00	10.02	13.04
FPC1.0-WFB11-10P011-H20	10	9.00	11.02	14.04
FPC1.0-WFB11-11P011-H20	11	10.00	12.02	15.04
FPC1.0-WFB11-12P011-H20	12	11.00	13.02	16.04
.....		...		
FPC1.0-WFB11-30P011-H20	30	(30-1)*1.0	(30+1)*1.0+0.02	(30+4)*1.0+0.04

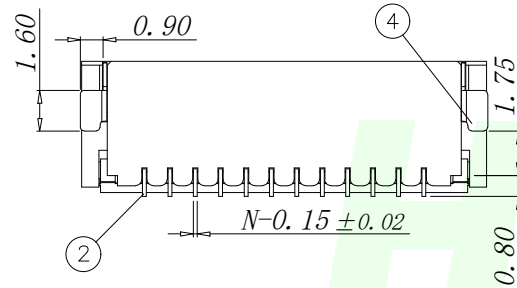

序号	品名	材质
1	1.0后翻胶芯 (H=2.0)	LCP UL94V-0 本色
2	1.0后翻端子 (H=2.0)	铜合金 / 表面镀锡
3	1.0后翻后盖 (H2.0)	LCP UL94V-0 黑色
4	1.0后翻焊片 (H2.0)	铜合金 / 表面镀锡

适用扁平线 (Applicable Flat Cable)

适用线路板 (PCB LAYOUT)

技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象.
2. 温度范围: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$.
3. 额定电压: 50V, AC/DC.
4. 接触电阻: $\leq 0.03\ \Omega$.
5. 绝缘电阻: $\geq 500\text{M}\ \Omega$

GENERAL TOLERANCES UNLESS SPECIFIED			深圳市华明通电子有限公司 Shenzhen Huamingtong Electronics Co., Ltd		
.X	±0.30	.X°	±5°	PART NO.	TITLE:
.XX	±0.20	.XX°	±2°	FPC1.0-WFB11-NP011-H20	1.0 Pitch 后翻式 (H=2.0)
.XXX	±0.05	.XXX°	±1°	DESIGN: James	CUSTOMER
MANUFACTURE DWG			CHED: Talen	SIZE	UNITS
			APPD: Sophia	A4	MM
				SCALE	SHEET
				N:A	1/1