


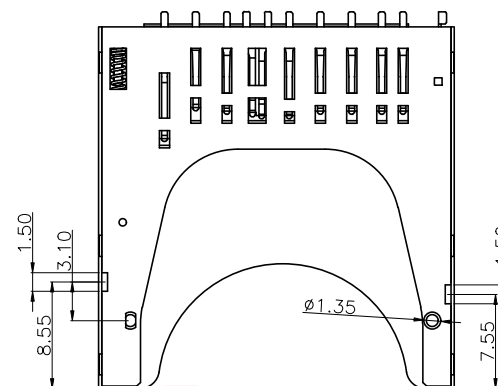







PIN NO.	NAME	TYPE	DESCRIPTION
#1	CD/DAT3	I/O/PP	CARD DETECT/DATA LINE(BIT 0)
#2	CMD	PP	COMMAND/RESPONSE
#3	VSS1	S	SUPPLY VOLTAGE GROUND
#4	VDD	S	SUPPLY VOLTAGE
#5	CLK	I	CLOCK
#6	VSS2	S	SUPPLY VOLTAGE GROUND
#7	DAT0	I/O/PP	DATA LINE(BIT 0)
#8	DAT1	I/O/PP	DATA LINE(BIT 1)
#9	DAT2	I/O/PP	DATA LINE(BIT 2)

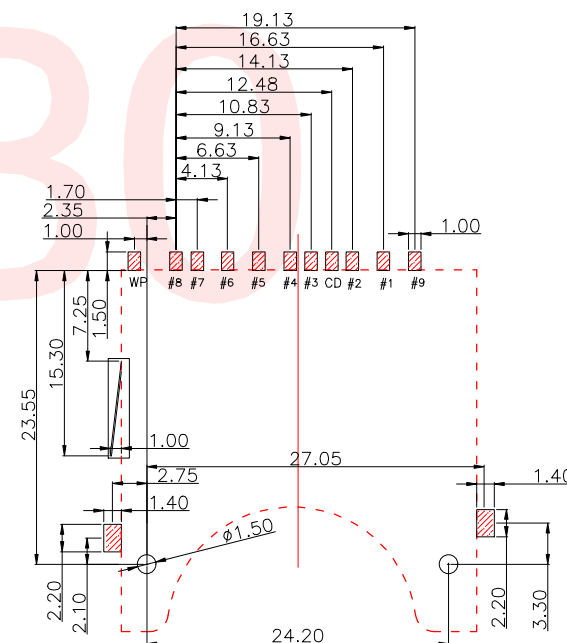

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05

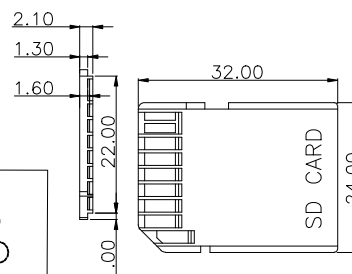

CIRCUIT:



UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X.X : ± 0.35	.X : $\pm 5^\circ$
X.XX : ± 0.25	.XX : $\pm 3^\circ$
X.XXX : ± 0.15	



东莞市汉博电子科技有限公司
DONGGUAN HANBO TECHNOLOGY CO., LTD

TITLE	SD CARD CONN PUSH SMT			
DWN	xiong	PART NO. SD-111		
CHKD	lee	SCALE:1:1	UNIT: mm	
APVD	wang	SIZE: A4	SHEET:10F 1	REV: A4
CUSTOMER COPY				