
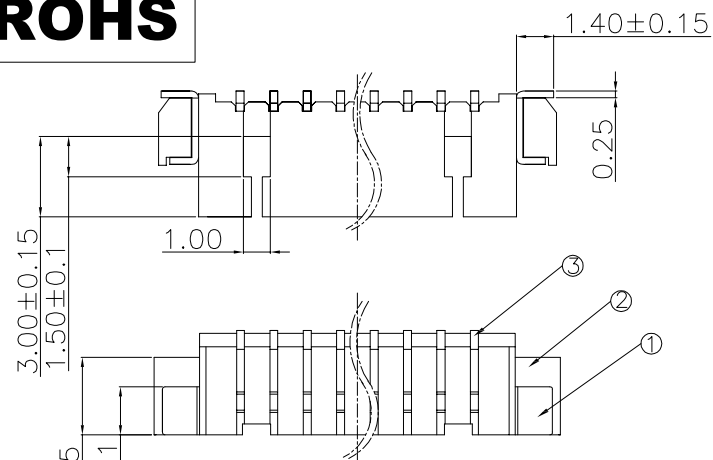



PCB Layout

■ SPECIFICATIONS

- ◆ Rated voltage: 125V DC,AC(rms)
- ◆ Rated Current: 1A
- ◆ Withstand voltage: 500V AC/min.
- ◆ Working Temp : -25°C ~ +85°C
- ◆ Insulation resistance: ≥100 MΩ
- ◆ Contact resistance: ≤20mΩ

No. of Contacts	DIMENSIONS			
	A	B	C	D
2P	7.40	4.30	1.25	2.40
3P	8.65	5.55	2.50	3.65
4P	9.90	6.80	3.75	4.90
5P	11.15	8.05	5.00	6.15
6P	12.40	9.30	6.25	7.40
7P	13.65	10.55	7.50	8.65
8P	14.90	11.80	8.75	9.90
9P	16.15	13.05	10.0	11.15
10P	17.40	14.30	11.25	12.40
11P	18.65	15.55	12.50	13.65
12P	19.90	16.80	13.75	14.90
13P	21.15	18.05	15.00	16.15
14P	22.40	19.30	16.25	17.40
15P	23.65	20.55	17.50	18.65
16P	24.90	21.80	18.75	19.90

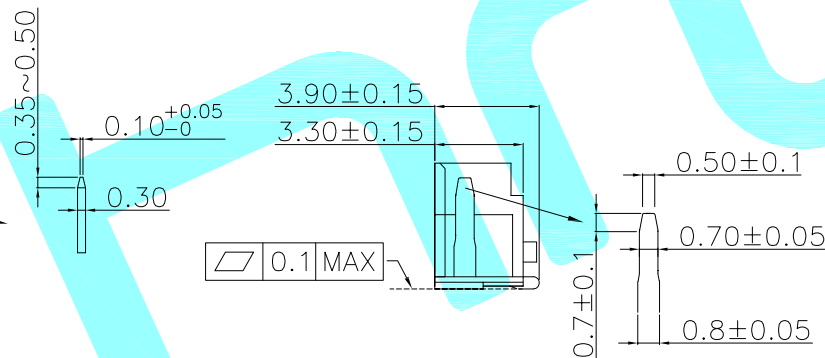

③	Solder Tab	——	2	Brass	Sn-PLATED	——
②	PIN	——	——	Phosphor bronze	Sn-PLATED	——
①	Base	——	1	LCP	Beige	——
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS			DATE			
DRAWN		LIUCAN	2022.12.1			
CHECKED				TITLE:	Bar Connector Series	
APPROVALS				PART NO.	1.25T-nP-WV	
TOLERANCES ARE		30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
		10~30	±0.20			
		5~10	±0.15			
		~ 5	±0.10			
		±2'		DRAWING NO.	———	SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			