

Socket : RT-C14-E15B-AA

1.Rating : 10A 250VAC VDE CCC

15A 250VAC UL CUL

2.Insulation resistance : >100MΩ Min 500VDC

3.Dielectric strength : >2000V 1 minute

Switch : SS21-BBIWG-R

1.Rating : 10A 125/250VAC UL CUL

12(4)A 250V~ ENEC17;NEMKO;CQC



2.Contact resistance : <50mΩ

3.Insulation resistance : >100MΩ Min 500VDC

4.Dielectric strength : >1500Vac 0.5mA 1 minute

电话: 0769-82310511-867

邮箱: hooya89@hooya.hk

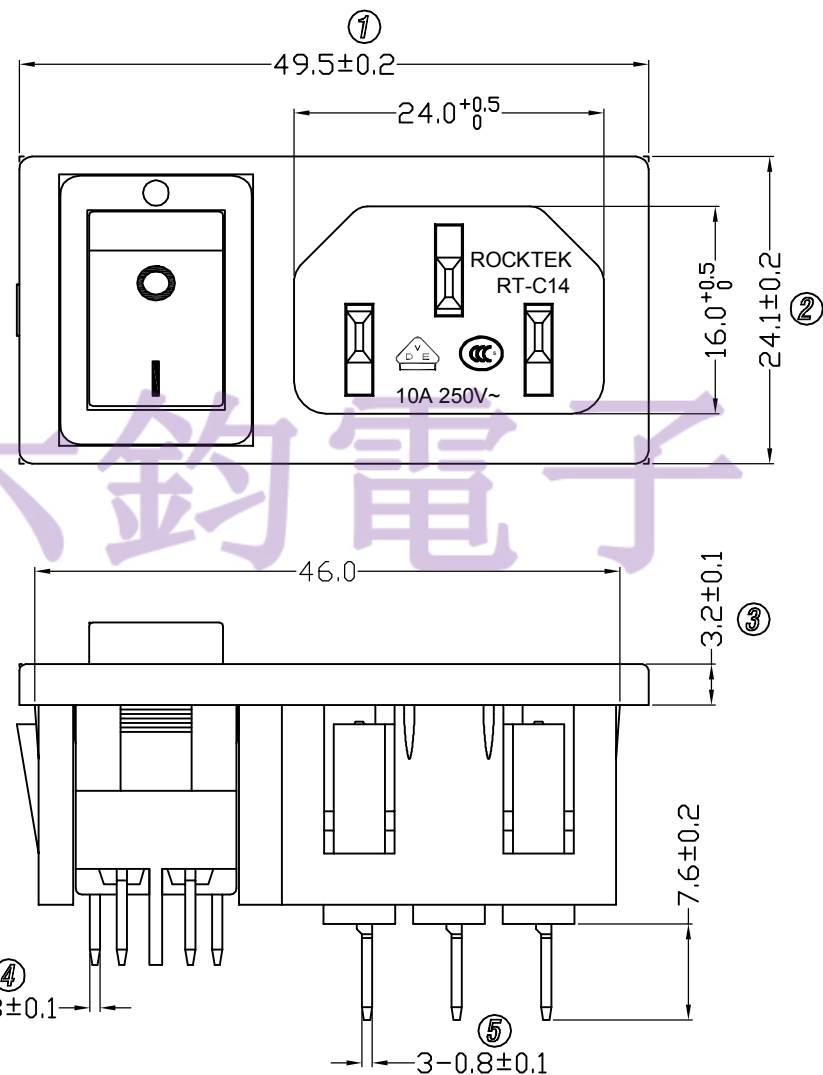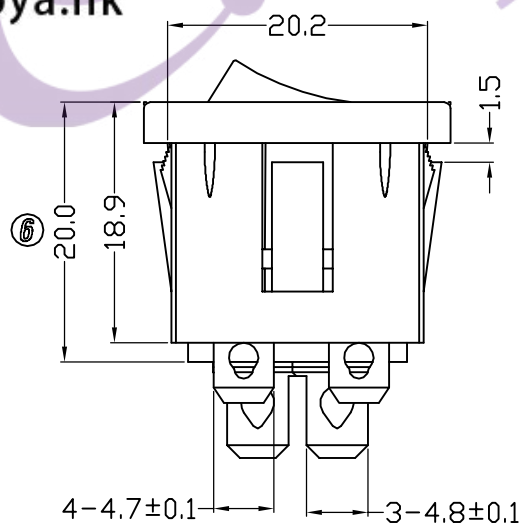

△原品名: RT-C14-E1+SS21-1

5		10		DIMENSIONAL TOLERANCES		APPROVED	CHECKED	DESIGN	DRAWN	ALL SIZE ARE IN	MM		
4		9		RANGE	TOLERANCE				LMC 2019. 04. 03	SCALE	NO		
3		8		X	±0.30					MAT'L	***		
2		7		X.X	±0.20					MATERIAL NO.		DRAWING NO.	REV.
1	修改品名	6		X.XX	±0.10								
NO	DESCRIPTION	NO	DESCRIPTION	ANGLES	±1°	LEGION ELECTRONIC & HARDWARE CO., LTD.				RT-C14-E1+SS21-1BB		WIF119037	A1