

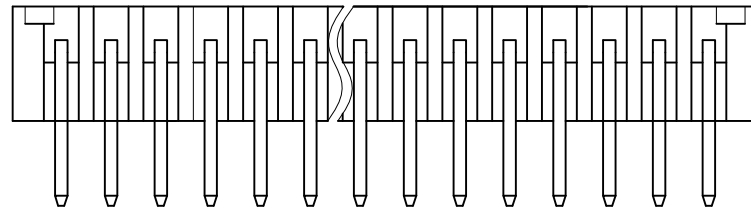


P. C. B LAYOUT



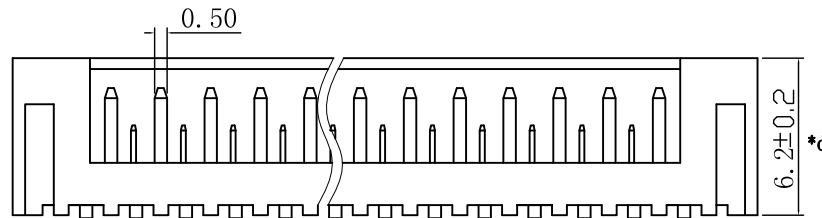


SPECIFICATION

1. Rating : AC/DC 250V 2A.
2. Contact resistance: ≤50mΩ.
3. Insulation resistance: ≥1000MΩ (DC500V).
4. Withstanding voltage: 800VAC .
5. PINRETENTIVE FORCE 针固定力: ≥10N
6. life test: 50 cycles.
7. Operation temperature range:-25℃~85℃.
8. Sign"*" is importance dimension.

$A = (\text{PIN}-1) \times 2.0$

$B = (\text{PIN}-1) \times 2.0 + 4.0$

				TOLERANCE UNLESS SPECIFIED								
				<1.5: ±0.1mm	ANGLES ±1.5°							
				>1.5~5.0: ±0.25mm			NO	DATE	REVISIONS		BY	APPD
				>5.0: ±0.3mm								
				TITLE: CONNECTOR				UNIT : MM	ROHS COMPLIANT	DWN		
				PART NO.: PH2001-04R				SCALE: 2:1	CHK'D			
2	CONTACT FOOT	BRASS	4	AG-PLATING								
1	HOUSE	PA66	1	WHITE								
NO.	PART NAME	MATERIAL	QTY	FINISHING	 DONGGUANG HAOYU ELECTRONICS CO., LTD 东莞市弘皓电子有限公司				APPD			
				PRO.AGL:							REV :AO	