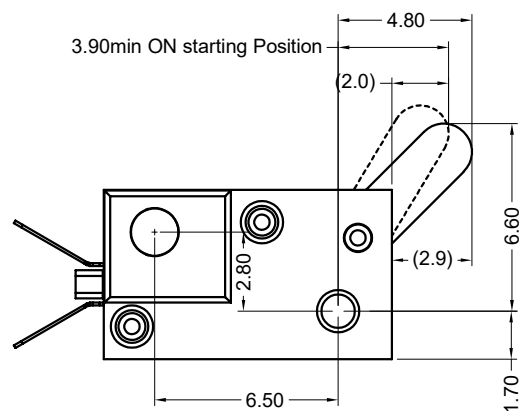
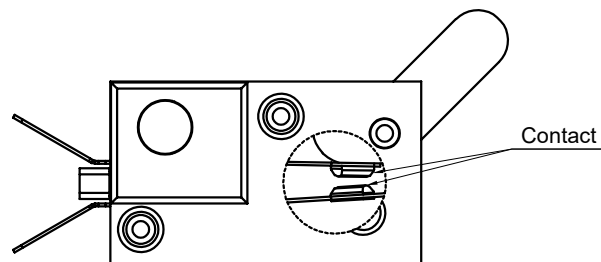
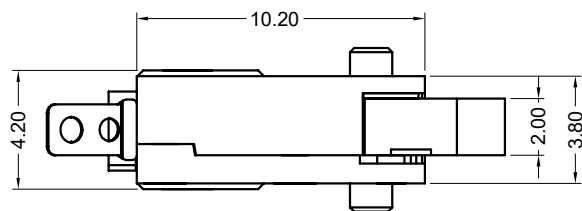



GT-MPU116S-H083-L1

G-SWITCH

Detector Switch
P/N: _____

Switch Height (mm)
H083=8.3mm

Switch lifetime (Force)
L1=100,000 Cycles

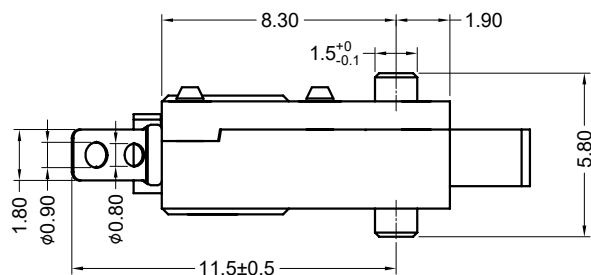

CIRCUIT DIAGRAM

G-Switch Specification:

Operating temperature range: -30°C to +85°C

Rating: 0.1A 30V DC

Insulation resistance:: 100MΩ min.100V DC

Dielectric strength: 250V AC for 1 min

Contact resistance: 100m Ω max.

Operating force: $70 \pm 10 \text{ gf}$

5	Contact	2		
4	Stem	1	PBT UL94 V0	
3	Contact Form	2	C17200	
2	Cover	1	PBT UL94 V0	
1	Housing	1	PBT UL94 V0	
序号	零件名称	数量	材质	备注



RoHS
Compliant
2002/95/EC



b-Switch 品赞科技®

Unless otherwise specified, Tolerance:

X.	±0.30
X.x	±0.20
X.xx	±0.15
X.xxx	±0.10
Angles	±3°

G-Switch Electronic (HongKong) CO.,Ltd.

DESIGN	FengFengChen	DATE	2022.10.08
--------	--------------	------	------------

CHECKED	DATE
---------	------

APPROVED	DATE
----------	------

<http://www.dq-switch.com>

TEL:0769-82388879

Molde code:

GT-MPU116S-H083-L1

REV.: X1

SIZE:	A4
-------	----

SCALE: 4:1	UNIT: mm
------------	----------

