



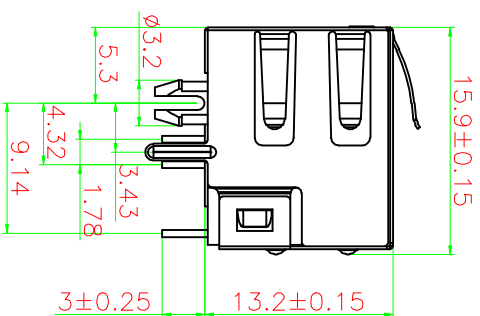

Material Specification
Housing :Thermo-plastic, UL94V-0.

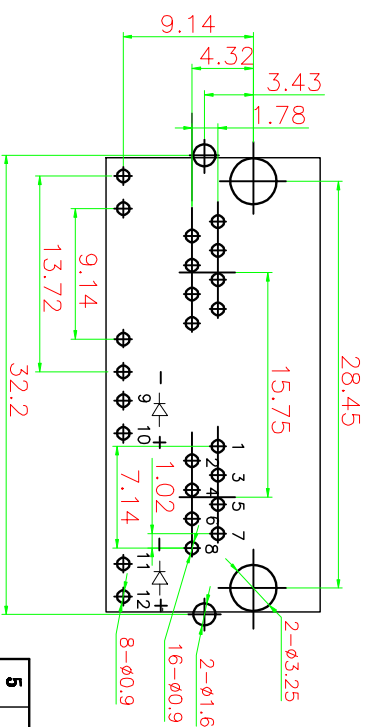

This diagram illustrates the exploded view of a 15-pin D-sub connector assembly. The components shown include the housing, the internal contact pins, and the external pins. The housing is a rectangular plastic shell with a D-shaped cutout on one side. The internal contact pins are arranged in a 3x5 grid. The external pins are arranged in a 3x5 grid, with the top row being shorter than the bottom two rows. The diagram shows the housing, the internal contact pins, and the external pins in their relative positions, indicating how they fit together.

序号	名称	材料	数量	键层/颜色	备注
5	外壳	HS2	1	NI	
4	LED灯	树脂/FE	4	NI/AG	
3	插针	PHOSPHOR BRONZE	16	FU'	
2	右分体	PA46	1	BLACK	
1	左分体	PA46	1	BLACK	

温州瑞川电子有限公司
WEN ZHOU RUI CHUAN ELECTRONIC CO., LTD.

给 图:	日 期:	— 公差 —		品 名:	RCR-56-31-12(带灯带罩)			
		30~	± 0.25		料 号:	563112-8YGG2410AB30 (RC01053)		
审 核:	日 期:	10~30	± 0.20	型 号:	RJ45			
核 准:	日 期:	~10	± 0.15	图 号:				
		角 度:	$\pm 2^{\circ}$	单 位:	mm	比 例:	1:1	纸 张:
		页 面:	1 of 1	版 本:				