


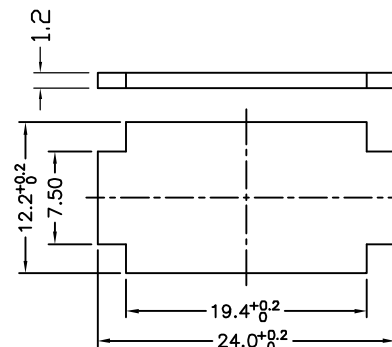
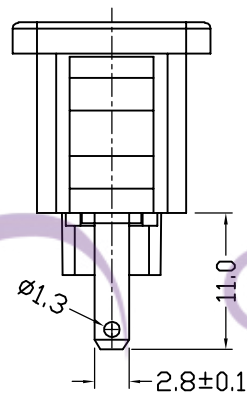
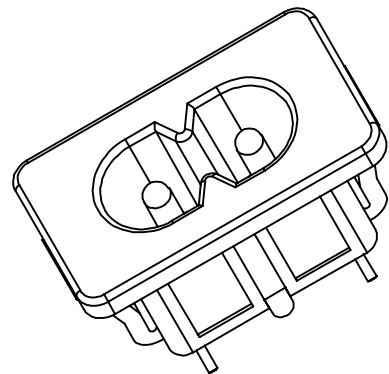
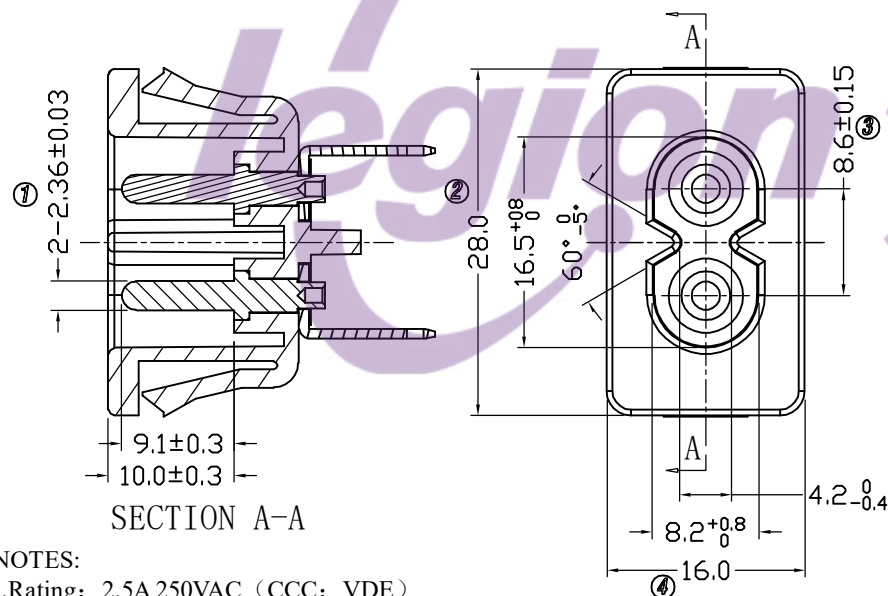


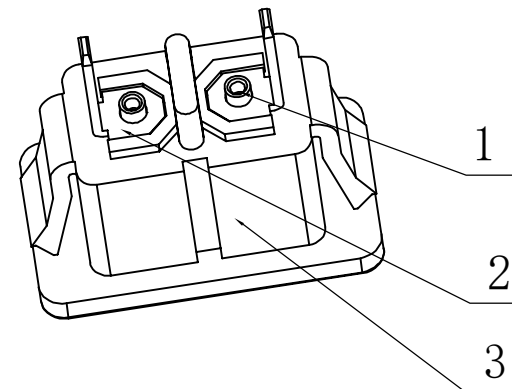

PCB. LAYOUT

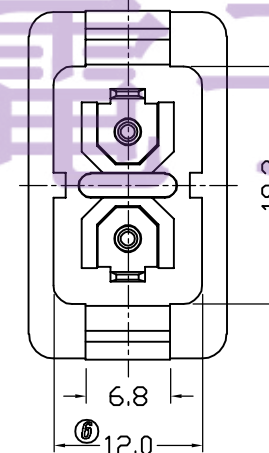

SECTION A-A

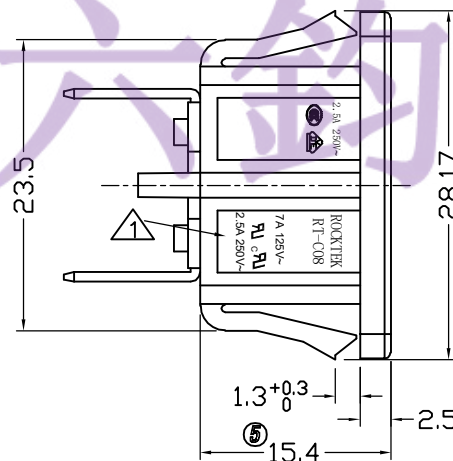

NOTES:

1. Rating: 2.5A 250VAC (CCC; VDE)
2.5A 250VAC 7A 125VAC (UL; CUL)
2. Contact resistance: 50mΩ Max
3. Insulation resistance: >100MΩ (Min) 500VDC
4. Dielectric strength: >2000VAC 0.5mA 1 minutes

TEL: 0769-82310511-867

3	BODY	PA66 94-V0 Black	1
2	1# terminal	C2680 1/2H Tin-plating 3~5um	2
1	1# PIN	C3602 Ni-plating 3~5um	2
NO.	PART NAME	MATERIAL	Q'TY

5	→	10	→	DIMENSIONAL TOLERANCES		APPROVED	CHECKED	DESIGN	DRAWN	ALL SIZE ARE IN	MM		
4	→	9	→	RANGE	TOLERANCE					SCALE	FIT		
3	→	8	→	X	±0.3					MAT'L	***		
2	→	7	→	X.X	±0.2					MATERIAL NO.			
1	修改UL安规刻字21.01.30	6	→	X.XX	±0.1							DRAWING NO.	REV.
NO	DESCRIPTION	NO	DESCRIPTION	ANGLES	±1'	ROCK TEK ELECTRONIC(SHENZHEN) CO.,LTD.				RT-C08-I0-BI		WIF118006	A1