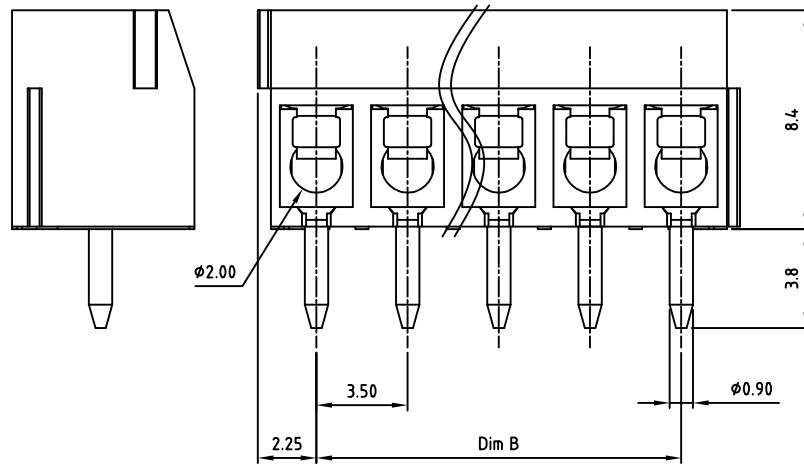
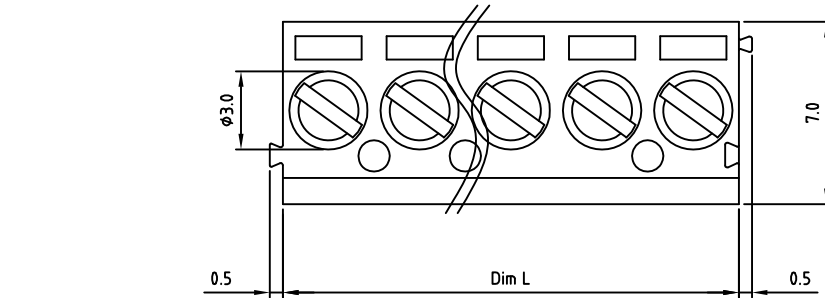


Technical data

- Nominal voltage: 300V/10A
PITCH: 3.5mm
- Connection capacity:
AWG 26-16
- Insulation Withstanding Voltage:
AC 1600V/MIN
- Insulation Resistance:
1000MΩ or more at DC500V
- Tightening torque:
2.0kgf.cm (0.2N.m)
- Screw thread: M2
- Stripping length: 5-6mm
- Operating temperature range: -40°C ~ 115°C
Soldering temperature: 250°C ± 10°C / 5s
- Undimensioned Tolerances:

Dim.L=P×3.5 Dim.B=(P-1)×3.5 P= number of poles(2-24P)		
0-30mm	±0.10	±0.15
over 30mm-60mm	±0.15	±0.20
over 60mm-90mm	±0.20	±0.25
over 90mm	±0.25	±0.30

- Safety approval:
- RoHS Compliance

Part No.: OSTTEXX0104

No. of Poles	COLOR
02 2 Poles	0: Black (Standard)
03 3 Poles	2: Red
...	3: Orange
24 24 Poles	4: Yellow
	5: Green
	6: Blue
	8: Grey

Nonstandard colors
Mins could apply

4	WIRE GUARD	Stainless steel		P
3	SCREW	STEEL	M2.0, Zn Plated	P
2	CAGE	BRASS	M2.0, Tin PLATED	P
1	BODY	PA66 UL94V-0	ALL COLOR	1
ITEM	NAME OF PART	MATERIAL	NOTES	Q"TY
DWG	WF. Zhang	DATE 2017.10.19	UNITS: MM	SHEET: 1 OF 1
CHK	WF. Zhang	DATE 2017.10.19	SCALE: NONE 3:1 (:)	REV: A
APP		DATE	TITLE: OSTTE 3.5 Series Solid Block type	X. ±0.50
			PART NO. OSTTEXX0104	X.X ±0.30
			DWG NO. OSTTEXX0104.dwg	X° ±1°

SIGN	DESCRIPTION	CHK.	DATE



ON-SHORE TECHNOLOGY, INC.