

## Features

- Very Low FOM ( $R_{DS(on)} \times Q_g$ )
- Extremely low switching loss
- Excellent stability and uniformity
- 100% Avalanche Tested
- Fast Recovery Time



## Application

- Switch Mode Power Supply (SMPS)
- Uninterruptible Power Supply (UPS)
- Power Factor Correction (PFC)
- AC to DC Converters
- Telecom, Solar

## Key Parameters

| Parameter              | Value | Unit |
|------------------------|-------|------|
| $BV_{DSS} @ T_{j,max}$ | 650   | V    |
| $I_D$                  | 54    | A    |
| $R_{DS(on), max}$      | 70    | mΩ   |
| $Q_g, Typ$             | 106   | nC   |

## Package & Internal Circuit

| TOLL-8                                                                            | SYMBOL                                                                              |
|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |

## Absolute Maximum Ratings $T_C=25^\circ\text{C}$ unless otherwise specified

| Symbol         | Parameter                                                             | Value       | Unit             |
|----------------|-----------------------------------------------------------------------|-------------|------------------|
| $V_{DSS}$      | Drain-Source Voltage                                                  | 650         | V                |
| $V_{GS}$       | Gate-Source Voltage                                                   | $\pm 20$    | V                |
| $I_D$          | Drain Current - Continuous ( $T_C = 25^\circ\text{C}$ )               | 54.0        | A                |
|                | Drain Current - Continuous ( $T_C = 100^\circ\text{C}$ )              | 26.6        | A                |
| $I_{DM}^{1)}$  | Drain Current - Pulsed                                                | 126         | A                |
| $E_{AS}^{2)}$  | Single Pulsed Avalanche Energy                                        | 807         | mJ               |
| $I_{AR}$       | Avalanche Current                                                     | 4.1         | A                |
| dv/dt          | MOSFET dv/dt ruggedness, $V_{DS}=0 \dots 400\text{V}$                 | 50          | V/ns             |
| dv/dt          | Reverse diode dv/dt, $V_{DS}=0 \dots 400\text{V}$ , $I_{DS} \leq I_D$ | 15          | V/ns             |
| $P_D$          | Power Dissipation ( $T_C = 25^\circ\text{C}$ )                        | 272         | W                |
| $T_J, T_{STG}$ | Operating and Storage Temperature Range                               | -55 to +150 | $^\circ\text{C}$ |

## Thermal Resistance Characteristics

| Symbol          | Parameter                                     | Value | Unit               |
|-----------------|-----------------------------------------------|-------|--------------------|
| $R_{\theta JC}$ | Thermal Resistance, Junction-to-Case, Max.    | 0.46  | $^\circ\text{C/W}$ |
| $R_{\theta JA}$ | Thermal Resistance, Junction-to-Ambient, Max. | 62.5  | $^\circ\text{C/W}$ |

**Electrical Characteristics**  $T_J = 25^\circ\text{C}$  unless otherwise specified

| Symbol                                                 | Parameter                                             | Test Conditions                                                                            | Min | Typ  | Max | Unit |
|--------------------------------------------------------|-------------------------------------------------------|--------------------------------------------------------------------------------------------|-----|------|-----|------|
| On Characteristics                                     |                                                       |                                                                                            |     |      |     |      |
| V <sub>GS</sub>                                        | Gate Threshold Voltage                                | V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = 1.82 mA                               | 2.5 | -    | 5.0 | V    |
| R <sub>DS(ON)</sub>                                    | Static Drain-Source On-Resistance                     | V <sub>GS</sub> = 10 V, I <sub>D</sub> = 18.7 A                                            | -   | 61   | 70  | mΩ   |
| Off Characteristics                                    |                                                       |                                                                                            |     |      |     |      |
| BV <sub>DSS</sub>                                      | Drain-Source Breakdown Voltage                        | V <sub>GS</sub> = 0 V, I <sub>D</sub> = 1mA                                                | 650 | -    | -   | V    |
| I <sub>DSS</sub>                                       | Zero Gate Voltage Drain Current                       | V <sub>DS</sub> = 650 V, V <sub>GS</sub> = 0                                               | -   | -    | 5   | μA   |
|                                                        |                                                       | V <sub>DS</sub> = 650 V, T <sub>C</sub> = 150°C                                            | -   | 580  | -   | μA   |
| I <sub>GSS</sub>                                       | Gate-Body Leakage Current                             | V <sub>GS</sub> = ±20 V, V <sub>DS</sub> = 0 V                                             | -   | -    | ±1  | μA   |
| Dynamic Characteristics                                |                                                       |                                                                                            |     |      |     |      |
| C <sub>iSS</sub>                                       | Input Capacitance                                     | V <sub>DS</sub> = 400 V, V <sub>GS</sub> = 0 V, f = 1.0 MHz                                | -   | 4670 | -   | pF   |
| C <sub>oSS</sub>                                       | Output Capacitance                                    |                                                                                            | -   | 96   | -   | pF   |
| C <sub>rSS</sub>                                       | Reverse Transfer Capacitance                          |                                                                                            | -   | 3.5  | -   | pF   |
| Switching Characteristics                              |                                                       |                                                                                            |     |      |     |      |
| t <sub>d(on)</sub>                                     | Turn-On Time                                          | V <sub>DS</sub> = 300 V, I <sub>D</sub> = 23.6 A, R <sub>G</sub> = 25 Ω<br><br>(Note 3,4)  | -   | 78   | -   | ns   |
| t <sub>r</sub>                                         | Turn-On Rise Time                                     |                                                                                            | -   | 34   | -   | ns   |
| t <sub>d(off)</sub>                                    | Turn-Off Delay Time                                   |                                                                                            | -   | 351  | -   | ns   |
| t <sub>f</sub>                                         | Turn-Off Fall Time                                    |                                                                                            | -   | 22   | -   | ns   |
| Q <sub>g(</sub>                                        | Total Gate Charge                                     | V <sub>DS</sub> = 480 V, I <sub>D</sub> = 23.6 A, V <sub>GS</sub> = 10 V<br><br>(Note 3,4) | -   | 106  | -   | nC   |
| Q <sub>gs</sub>                                        | Gate-Source Charge                                    |                                                                                            | -   | 20   | -   | nC   |
| Q <sub>gd</sub>                                        | Gate-Drain Charge                                     |                                                                                            | -   | 31   | -   | nC   |
| Drain-Source Diode Characteristics and Maximum Ratings |                                                       |                                                                                            |     |      |     |      |
| I <sub>S</sub>                                         | Maximum Continuous Drain-Source Diode Forward Current |                                                                                            | -   | -    | 54  | A    |
| I <sub>SM</sub>                                        | Maximum Pulsed Drain-Source Diode Forward Current     |                                                                                            | -   | -    | 126 | A    |
| V <sub>SD</sub>                                        | Drain-Source Diode Forward Voltage                    | V <sub>GS</sub> = 0 V, I <sub>S</sub> = 23.6 A                                             | -   | -    | 1.3 | V    |
| t <sub>rr</sub>                                        | Reverse Recovery Time                                 | V <sub>R</sub> = 400 V, I <sub>F</sub> = 23.6 A<br>di <sub>F</sub> /dt = 100 A/μs          | -   | 170  | -   | ns   |
| Q <sub>rr</sub>                                        | Reverse Recovery Charge                               |                                                                                            | -   | 1.2  | -   | μC   |

**Notes :**

1. Repetitive Rating : Pulse width limited by maximum junction temperature
2.  $I_{AS}=4.1\text{ A}$   $V_{DD}=100\text{ V}$ ,  $R_G=25\Omega$ , Starting  $T_J=25^\circ\text{C}$
3. Pulse Test : Pulse Width  $\leq 300\mu\text{s}$ , Duty Cycle  $\leq 2\%$
4. Essentially Independent of Operating Temperature

## Typical Characteristics

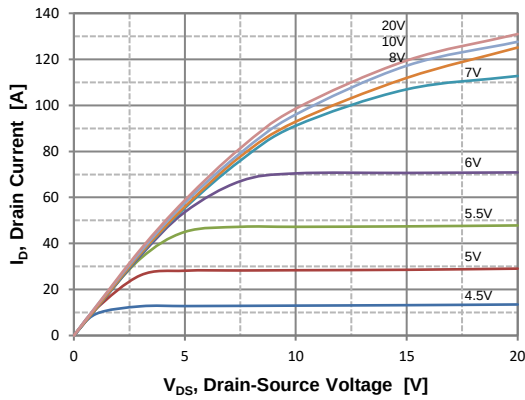


Figure 1. On Region Characteristics

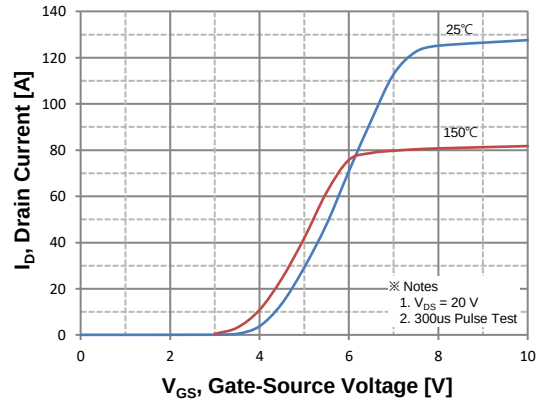


Figure 2. Transfer Characteristics

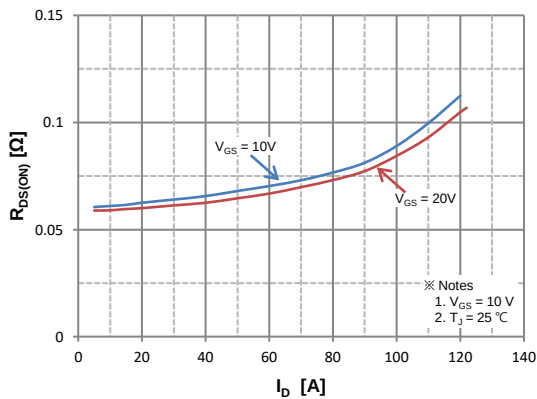


Figure 3. On Resistance Variation vs Drain Current and Gate Voltage

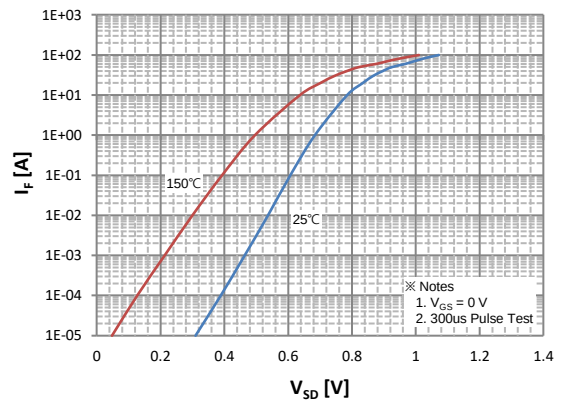


Figure 4. Body Diode Forward Voltage Variation with Source Current and Temperature

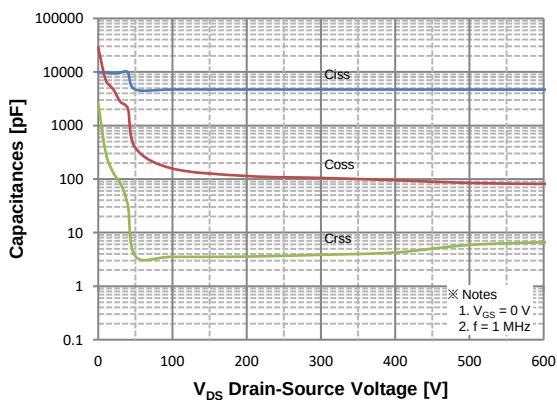


Figure 5. Capacitance Characteristics



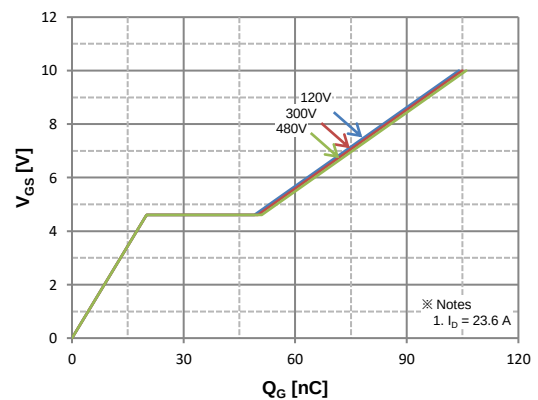


Figure 6. Gate Charge Characteristics


## Typical Characteristics

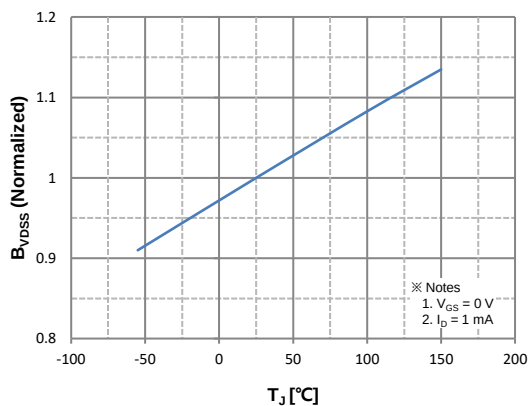


**Figure 7. Breakdown Voltage Variation vs. Temperature**

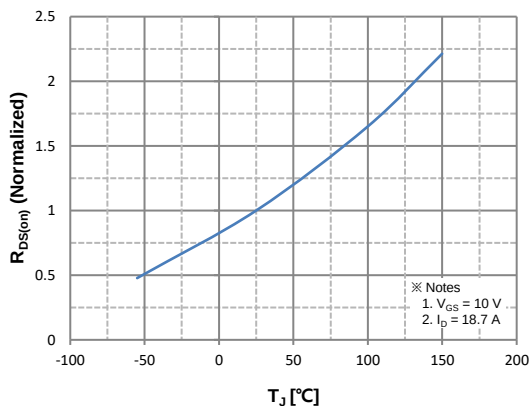


**Figure 8. On-Resistance Variation vs. Temperature**

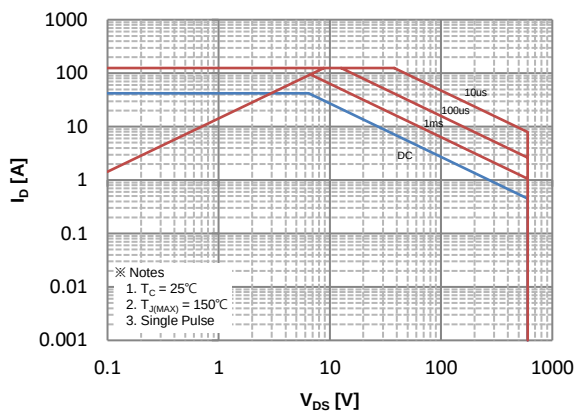

**Figure 9. Maximum Safe Operating Area**

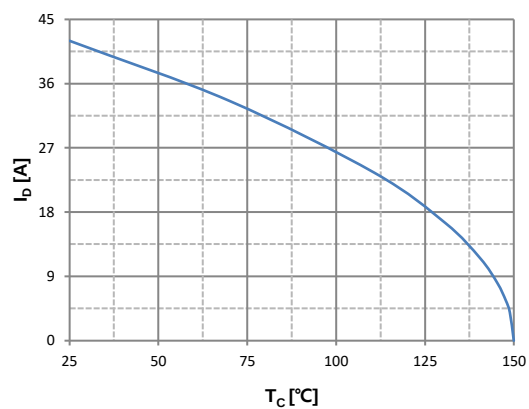


**Figure 10. Maximum Drain Current vs. Case Temperature**

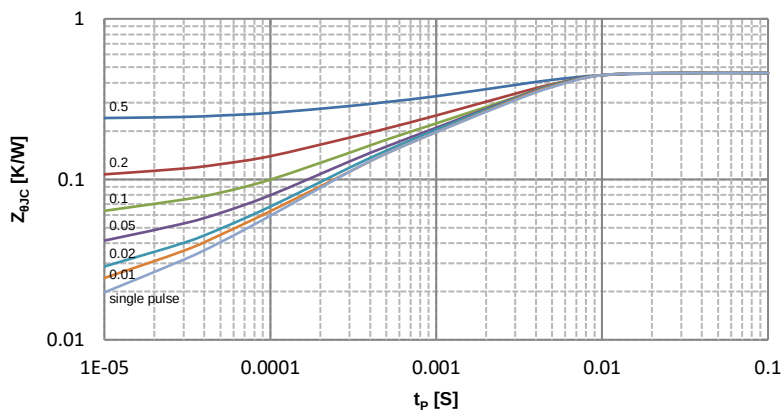


**Figure 11. Transient Thermal Response Curve**




**Fig 12. Gate Charge Test Circuit & Waveform**

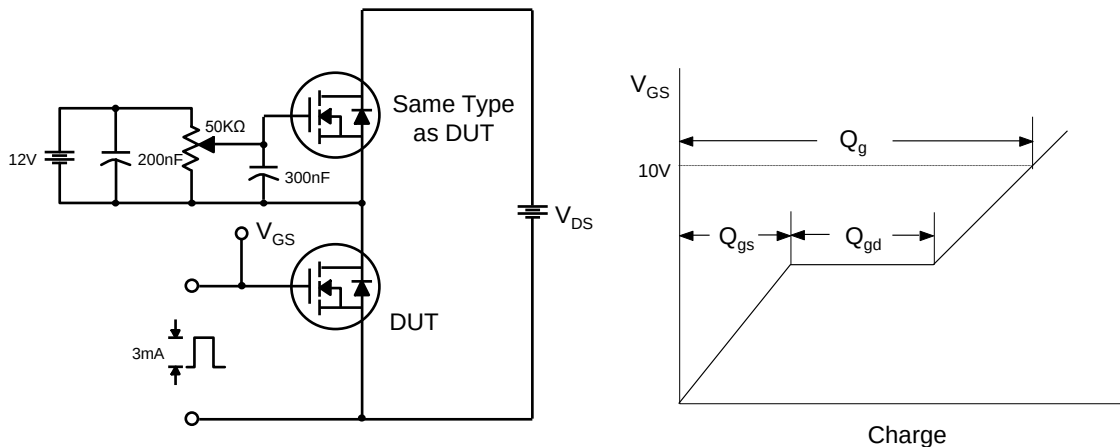


**Fig 13. Resistive Switching Test Circuit & Waveforms**

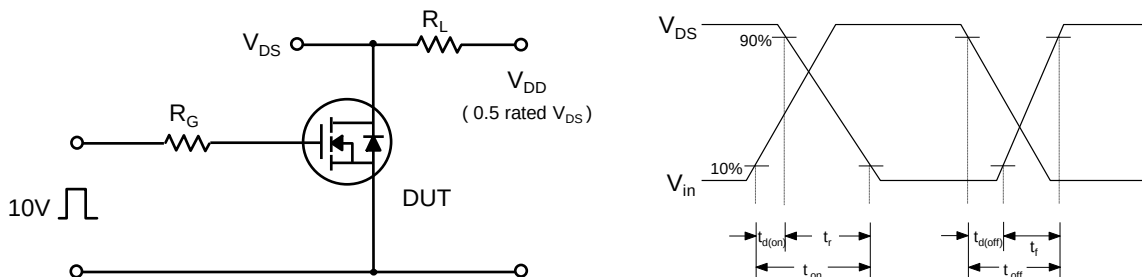


**Fig 14. Unclamped Inductive Switching Test Circuit & Waveforms**

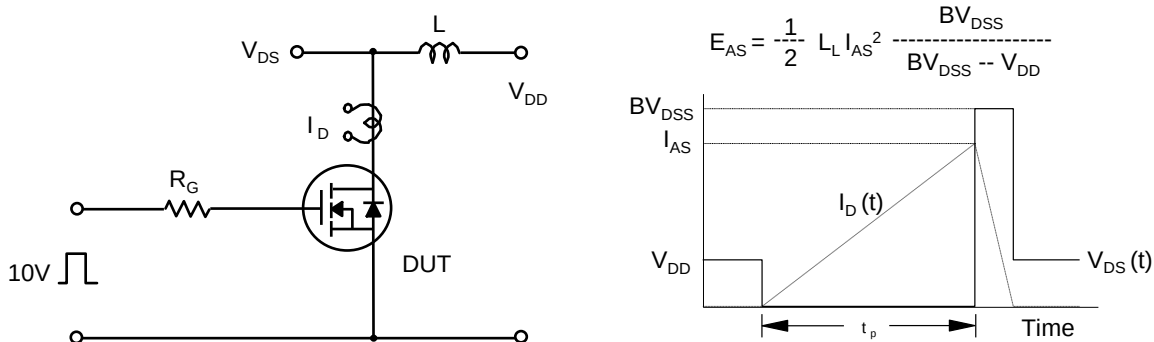

**Fig 15. Peak Diode Recovery dv/dt Test Circuit & Waveforms**

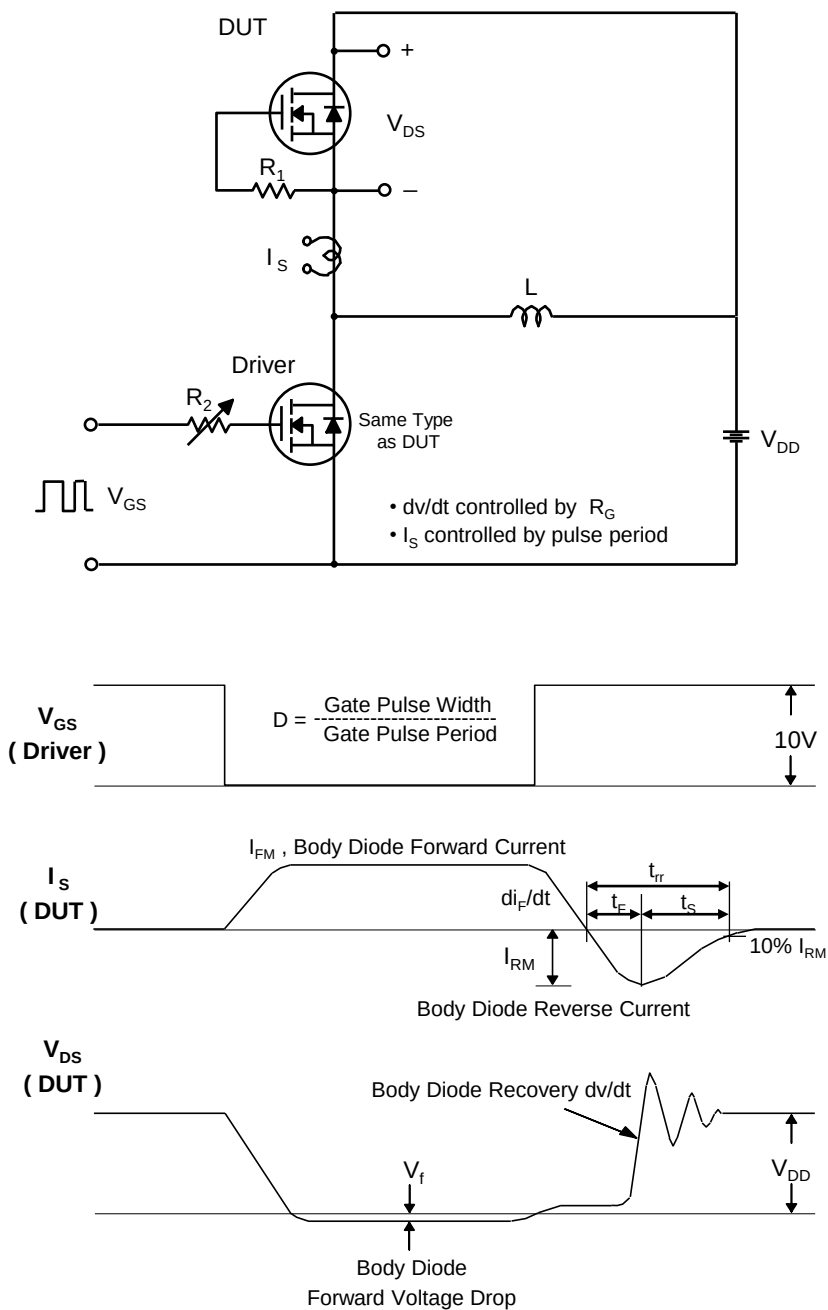

## Package Dimension

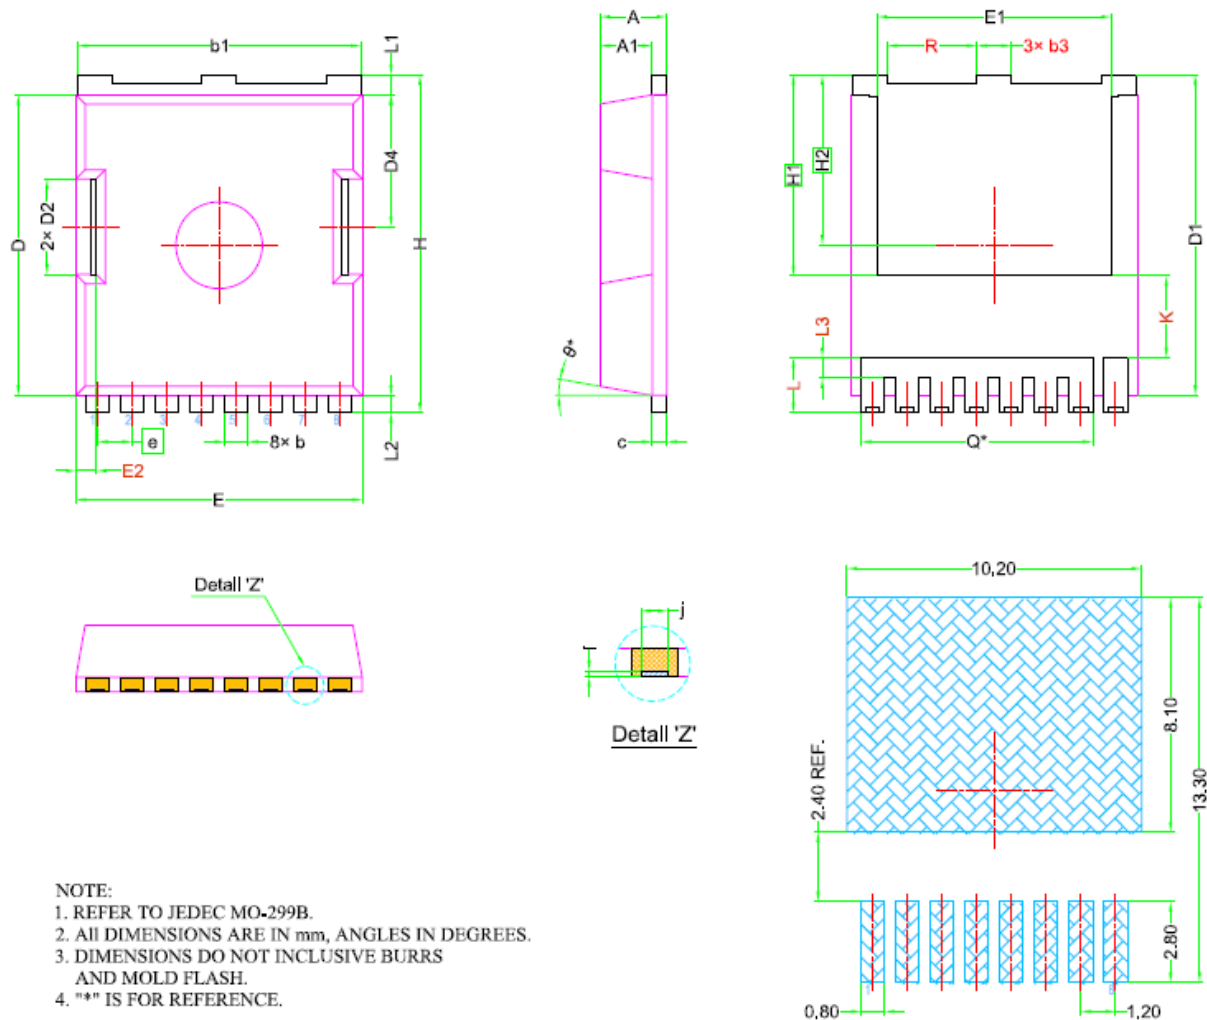

### NOTE:

1. REFER TO JEDEC MO-299B.
2. All DIMENSIONS ARE IN mm, ANGLES IN DEGREES.
3. DIMENSIONS DO NOT INCLUSIVE BURRS AND MOLD FLASH.
4. "\*" IS FOR REFERENCE.

| SYMBOL | DIMENSIONS |       |       |
|--------|------------|-------|-------|
|        | MIN        | NOM   | MAX   |
| A      | 2.20       | 2.30  | 2.40  |
| A1     | 1.70       | 1.80  | 1.90  |
| b      | 0.70       | 0.80  | 0.90  |
| b 1    | 9.70       | 9.80  | 9.90  |
| b 3    | 1.10       | 1.20  | 1.30  |
| c      | 0.40       | 0.50  | 0.60  |
| D      | 10.28      | 10.38 | 10.48 |
| D1     | 10.98      | 11.08 | 11.18 |
| D2     | 3.20       | 3.30  | 3.40  |
| D4     | 4.45       | 4.55  | 4.65  |
| E      | 9.80       | 9.90  | 10.00 |
| E1     | 8.00       | 8.10  | 8.20  |

|    |         |       |       |
|----|---------|-------|-------|
| E2 | 0.60    | 0.70  | 0.80  |
| e  | 1.20BSC |       |       |
| H  | 11.58   | 1..68 | 11.78 |
| H1 | 6.95BSC |       |       |
| H2 | 5.89BSC |       |       |
| I  | 0.10REF |       |       |
| j  | 0.46REF |       |       |
| K  | 2.80REF |       |       |
| L  | 1.40    | 1.90  | 2.10  |
| L1 | 0.60    | 0.70  | 0.80  |
| L2 | 0.60    | 0.60  | 0.70  |
| L3 | 0.30    | 0.70  | 0.80  |
| N  | 8       |       |       |
| Q  | 8.00REF |       |       |
| R  | 3.00    | 3.10  | 3.20  |
| θ  | 10° REF |       |       |

## Marking



**WPM = WPMtek's Logo**  
**54N65FTL = Marking Code**  
**XXX YYWW = Date Code**

WPMtek reserves the right to make changes to the product specification and data in this document without notice. WPMtek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does WPMtek assume any liability arising from the application or use of any products or circuits, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Any enquiry ,please write to sales@wpmtek.com for further information.