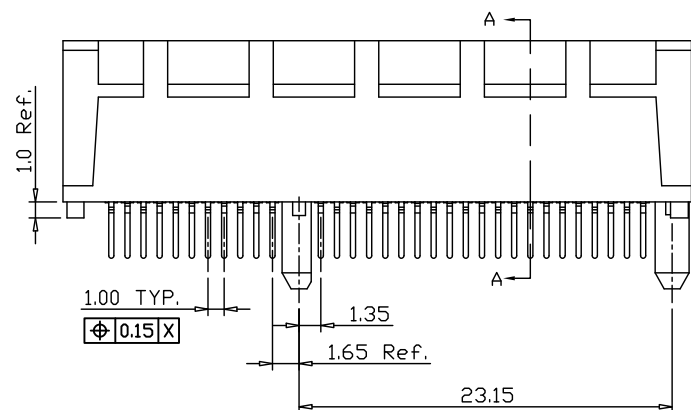
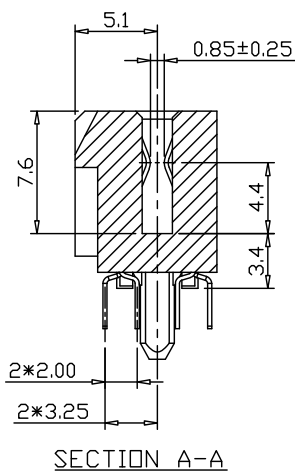
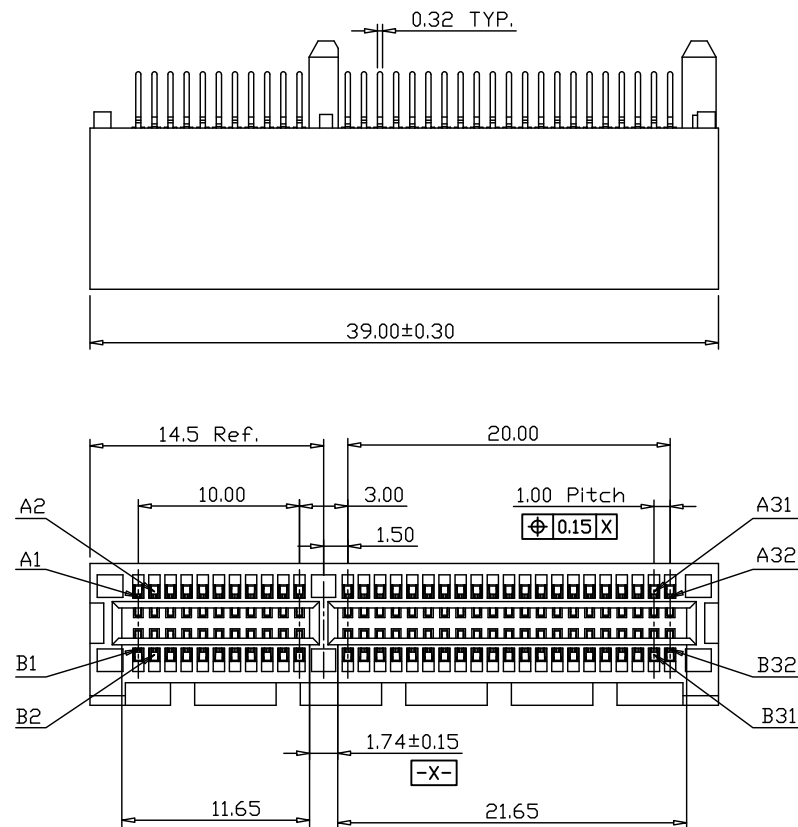


NOTES :

1.MATERIAL:

- 1). HOUSING: PA66+30%G/F, UL-HB, COLOR: BLACK;
- 2). CONTACT: Brass, T=0.25mm;

FINISH:

- a). 30u"MIN Ni UNDER PLATED ALL;
b). Au PLATING ON CONTACT AREA,
Tin PLATING ON SOLDER AREA;

2.MECHANICAL:

- a). INSERTION FORCE: 1.15N Max.Per contact pair;
b). Unmaating FORCE: 0.15N Min..Per contact pair;
c). DURABILITY: 50 CYCLES.

3.ELECTRICAL PERFORMANCE:

- b) CURRENT RATING: 1.1A Per Pin Min. ;
c) Contact resistance: 30m Ω MAX. (INITIAL) ;
d) INSULATION RESISTANCE: 500V DC, 1000M Ω MIN. ;
e) DIELECTRIC WITHSTANDING VOLTAGE:
APPLY 500V AC, NO BREAKDOWN.


4. Operating Temperature: -25° C to +85° C;

5. ALL MATERIAL SHOULD BE FULFILLED ROHS COMPLIANT.





深圳市华宇创精密电子有限公司


TOLERANCE:		DRAWN BY :	DATE :	PART NAME:	
X.X ±0.30		陈一鸣	2014-02-23	PCI-E 64pin 有肋导柱式	
X.XX ±0.25		CHECKED BY:	DATE :	PART NO.	HYCW28-PCI164-154B
X.XXX ±0.15				MOLD NO.	
X: ±2° X.X° ±0.5°		马跃	2014-02-23	DRAW NO:	HYC-2309111532
				SHEET NO.	1 OF 1
UNIT: mm [inch]	APPROVED BY:	DATE :			
SCALE:1:1 SIZE: A4	邱敏	2014-02-23			

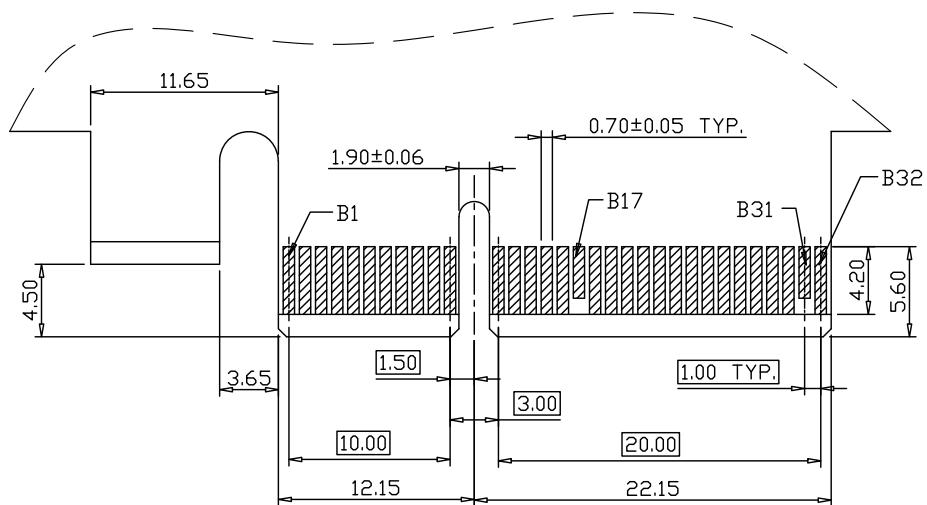

RECOMMENDED EDGE CARD
PATTERN (PRIMARY SIDE)

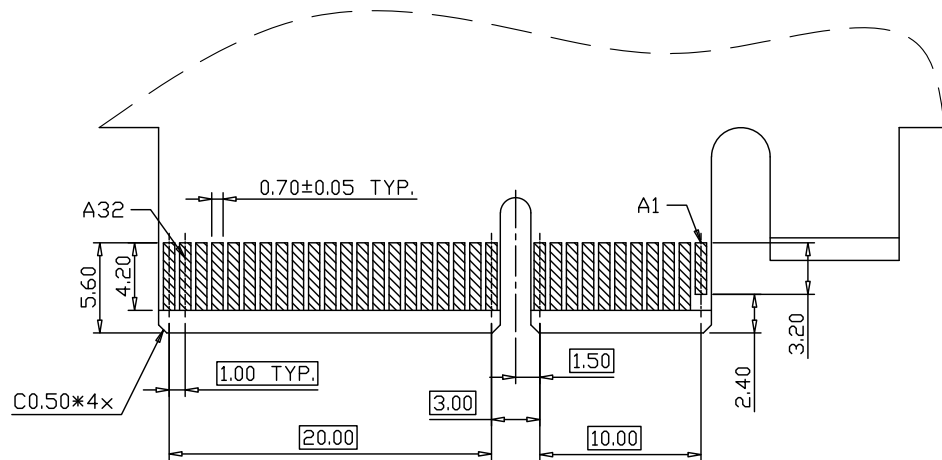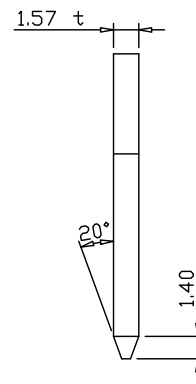


RECOMMENDED EDGE CARD
PATTERN (SECONDARY SIDE)

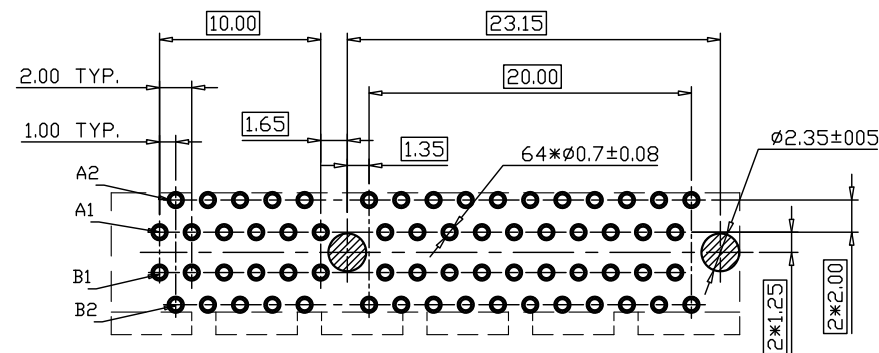

RECOMMENDED PCB LAYOUT (COMPONENT SIDE)
TOLERANCE: ±0.05



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: PCI-E 64pin 有肋导柱式
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYCW28-PCI64-154B
 UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2309111532
			SHEET NO. 1 OF 1