

1.材料和电镀\Materials and Finishes:

外 壳\Body - 黄铜\Brass,镀金\Gold plating

内导体\Contact - 铍铜\Beryllium copper,镀金\Gold plating

绝缘体\Insulator - 聚四氟乙烯\Teflon,本色\Natural

2.电气性能\Electrical:

A.特性阻抗\Impedance:50 Ohm

B.使用频率\Frequency range:DC-6GHz

C.介质耐压\Breakdown voltage:350V rms





D.绝缘电阻\Insulation resistance:1000 MΩ


3.机械性能\Mechanical:

A.使用寿命\Durability:500 cycles

B.中性盐雾\Salt spray:72 hours

推荐安装尺寸

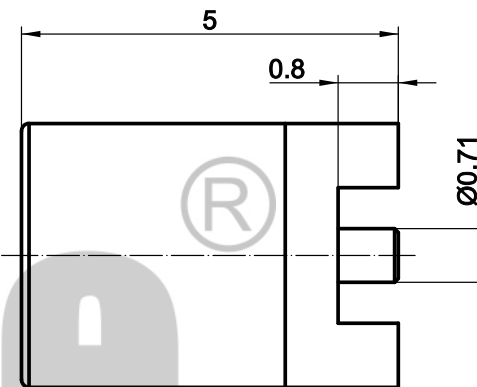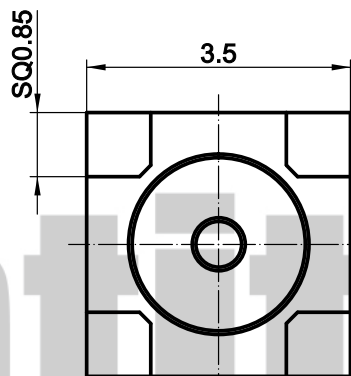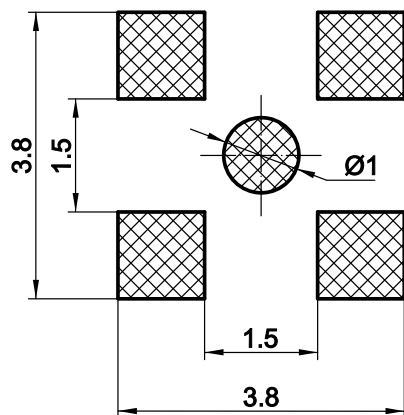

技术支持 13975145315 			版次		比例	10:1	料号	CT3.660.1159
			第一角法			规格	MMCX-KE-9	
			1.未注公差按ISO2768-1(m) 2.去尽毛刺C0.13max 3.各圆同轴度Ø0.1max			名称	MMCX直式表贴母头	
设计	JAT	2024.01.20				cntitle® 深圳成泰电子有限公司 www.cntitle.net		
审核	DF	2024.01.20						
批准	DF	2024.01.20	*尺寸为重要尺寸			单位	mm	