MARKETING SALES DRAWING


This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - [ ]

ORIENTATION

CIRCUIT

Electrical Testing per Tusonix standard test plans and Mil-Std-202 Test Methods.

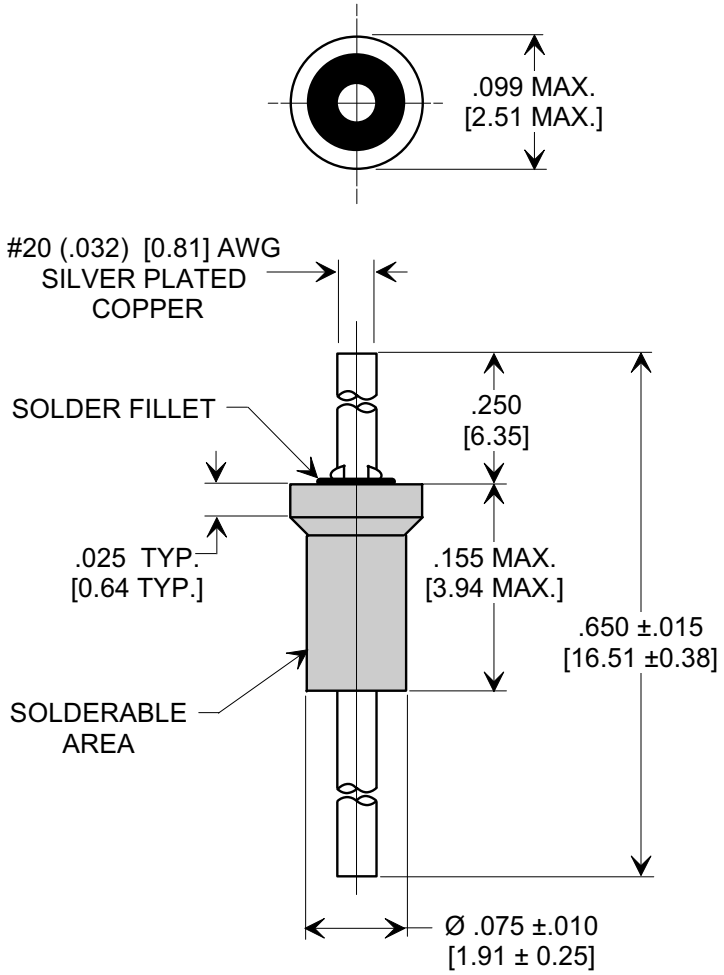

SPECIFICATIONS	
CAP. VALUE	1000 pF
CAP. TOL.	±20%
TEMP. CHAR.	X5U
OPERATING TEMP.	-55° TO +125°C
OPERATING VOLT.	200 WVDC @ +85 °C
DIELECTRIC WITHSTANDING	400 VDC, 2 SEC.

NOTES:
1. TUSONIX STANDARD PART NUMBER: 2463-002-X5U0-102M.
   TUSONIX RoHS COMPLIANT PART NUMBER: 2463-002-X5U0-102M LF.
   CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
2. PART MARKING: STANDARD PART, NO MARKING.
   RoHS PART: GREEN LABELING ON PACKAGING.

X-2015 Rev-0

REVISION RECORD

0	Original Release C.O. 20070108-1-01

--TOLERANCES--
Unless Otherwise Specified

DECIMAL ± .031 [0.79]

ANGLES ±

TUSONIX
TUCSON, ARIZONA

Title: **SHOULDER FEED-THRU**

Drawn **S.M. 01-08-07** | Scale **7X**

Approved **R.L. 01-08-07**

A **2463-002-X5U0-102M**

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Tusonix / CTS:

2463-002-X5U0-102MLF