

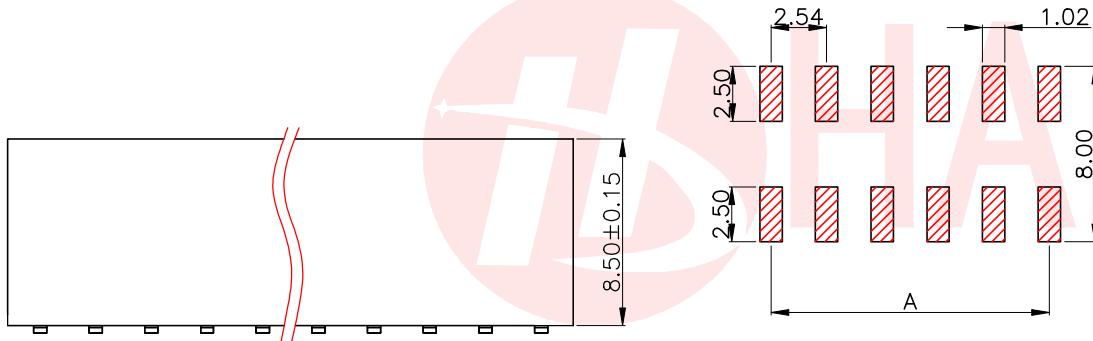




REV.	ECN NO OR DESCRIPTION	REVISED	DATE

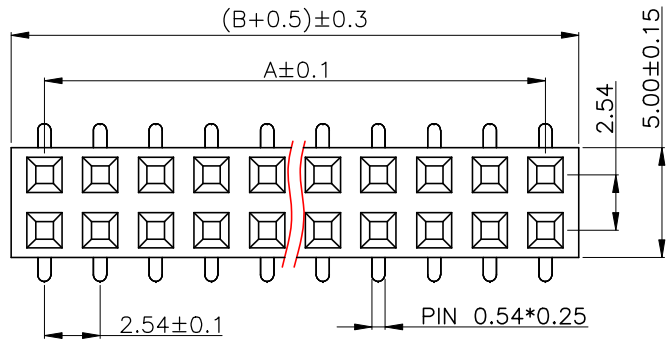

RECOMMEND P. C. B LAYOUT
PCB TOLERANCE: ±0.05 (TOP VIEW)

CSG PART NO.	No. of	DIM. A	DIM. B	CSG PART NO.	No. of	DIM. A	DIM. B
HB-FH7-25421PB2GOT	2*1P	0.00	2.54	HB-FH7-254221PB2GOT	2*21P	50.80	53.34
HB-FH7-25422PB2GOT	2*2P	2.54	5.08	HB-FH7-254222PB2GOT	2*22P	53.34	55.88
HB-FH7-25423PB2GOT	2*3P	5.08	7.62	HB-FH7-254223PB2GOT	2*23P	55.88	58.42
HB-FH7-25424PB2GOT	2*4P	7.62	10.16	HB-FH7-254224PB2GOT	2*24P	58.42	60.96
HB-FH7-25425PB2GOT	2*5P	10.16	12.70	HB-FH7-254225PB2GOT	2*25P	60.96	63.50
HB-FH7-25426PB2GOT	2*6P	12.70	15.24	HB-FH7-254226PB2GOT	2*26P	63.50	66.04
HB-FH7-25427PB2GOT	2*7P	15.24	17.78	HB-FH7-254227PB2GOT	2*27P	66.04	68.58
HB-FH7-25428PB2GOT	2*8P	17.78	20.32	HB-FH7-254228PB2GOT	2*28P	68.58	71.12
HB-FH7-25429PB2GOT	2*9P	20.32	22.86	HB-FH7-254229PB2GOT	2*29P	71.12	73.66
HB-FH7-254210PB2GOT	2*10P	22.86	25.40	HB-FH7-254230PB2GOT	2*30P	73.66	76.20
HB-FH7-254211PB2GOT	2*11P	25.40	27.94	HB-FH7-254231PB2GOT	2*31P	76.20	78.74
HB-FH7-254212PB2GOT	2*12P	27.94	30.48	HB-FH7-254232PB2GOT	2*32P	78.74	81.28
HB-FH7-254213PB2GOT	2*13P	30.48	33.02	HB-FH7-254233PB2GOT	2*33P	81.28	83.82
HB-FH7-254214PB2GOT	2*14P	33.02	35.56	HB-FH7-254234PB2GOT	2*34P	83.82	86.36
HB-FH7-254215PB2GOT	2*15P	35.56	38.10	HB-FH7-254235PB2GOT	2*35P	86.36	88.90
HB-FH7-254216PB2GOT	2*16P	38.10	40.64	HB-FH7-254236PB2GOT	2*36P	88.90	91.44
HB-FH7-254217PB2GOT	2*17P	40.64	43.18	HB-FH7-254237PB2GOT	2*37P	91.44	93.98
HB-FH7-254218PB2GOT	2*18P	43.18	45.72	HB-FH7-254238PB2GOT	2*38P	93.98	96.52
HB-FH7-254219PB2GOT	2*19P	45.72	48.26	HB-FH7-254239PB2GOT	2*39P	96.52	99.06
HB-FH7-254220PB2GOT	2*20P	48.26	50.80	HB-FH7-254240PB2GOT	2*40P	99.06	101.60

SPECIFICATIONS

Current Rating:1.5Amps
Withstanding Voltage: AC 500V
Insulation Resistance:1000MΩ Min
Contact Resistance:20mΩ Max
Operation Temperature: -40°to+105°
Insulator Material:Polyester(UL94V-0)
Contact Material:Phosphor bronze
Contact Material:Brass
Standard:PA6T
Contact Plating:Gold Flash
Max.Processing Temp: 240°C for30-60seconds
(260°C for5seconds)

HB-FH 7 - 254 XXX X X XX X - XXX
1 2 3 4 5 6 7 8 9

- 1:Series No:
FH-Pin Header

2:Welding Board Type:
7-双排SMT/SMT
TYPE

3:Pitch:
100-1.00mm
127-1.27mm
200-2.00mm
254-2.54mm

4:PIN位/PIN bit:
2*1P=21P
- 5:颜色/Color:
B-Black

6:材料/Material:
1-PBT 2-PA6T

7:触点电镀/Contact Plating:
G0-Gold Flash

8:包装方式/Package Type:
P-袋装/PE B-盒装/BOX
T-管装/Tubing W-卷装/winding

9:其他备注/Other remarks

UNLESS OTHERWISE SPECIFIED TOLERANCES		东莞市汉博电子科技有限公司 DONGGUAN HANBO TECHNOLOGY CO., LTD			
DECIMALS:	ANGLES:	TITLE	254FH H8.50 2xnPIN 双排SMT U型 PC7.2 PB8.8 PA6T		
X :±0.30	X :±2°	DWN	xiong	PART NO.	HB-FH7-254XXXXB2GOT
X.X :±0.25	X.X :±1°	CHKD	lee	SCALE:1:1	UNIT: mm
X.XX :±0.20		APVD	wang	SIZE: A4	SHEET:1OF 1
CUSTOMER COPY					