
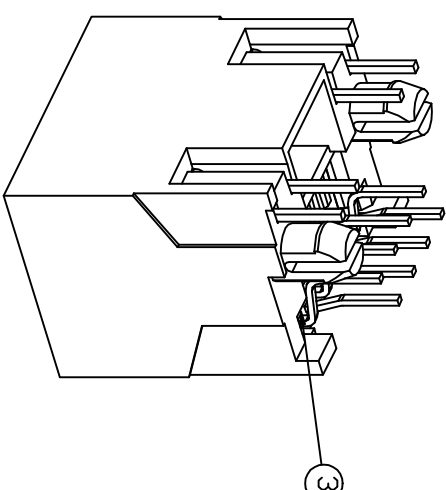
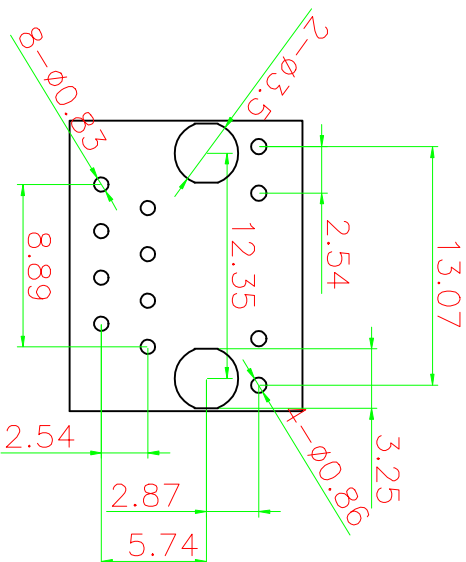
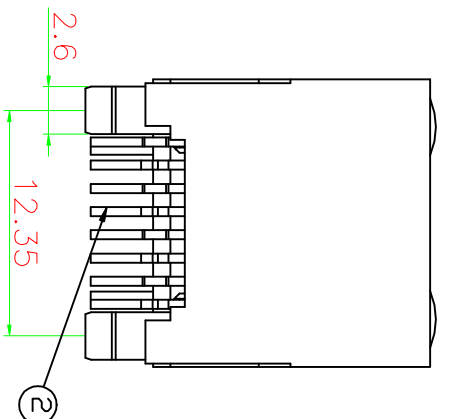
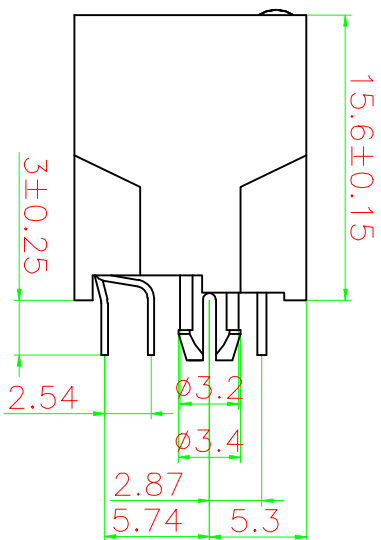


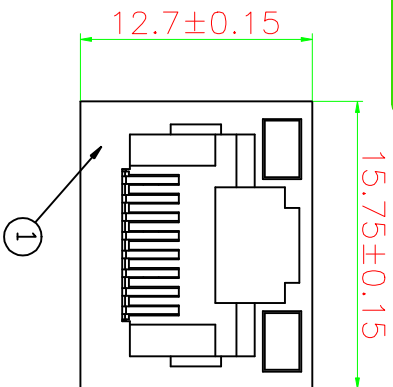

General Specification
Current Rating:1.5A DC /Contact, 20mA DC for LED signals
Voltage Rating:125V AC /Contact, 2.0 volts DC for LED signals
Operating Environment
Standard Temperature: -20℃~+70℃
Industrial Temperature: -40℃~+85℃
Humidity: 20~70%
Contact Resistance:≤30mΩ
Insulation Resistance:≥50MΩ
Dielectric Strength:500V AC/50HZ/Min
Withstanding Voltage:500V AC/50HZ/Min
Dielectric Strength:500V AC/50HZ/Min
Withstanding Voltage:500V AC/50HZ/Min
Durability:750 Cycles Min

Material Specification
Housing :Thermoplastic, UL94V-0.
Contact :Alloy Copper
Shield :Alloy Copper

Please refer to the customer drawing when customer has specified

网络插座外形图



温州瑞川电子有限公司
WEN ZHOU RUI CHUAN ELECTRONIC CO., LTD.

序号	名称	材料	数量	镀层/颜色	备注
4	LED灯	树脂/PS	2	NI/AG	
3	针座	LCP	1	BLACK	
2	插针	PHOSPHOR BRONZE	8	10"	
1	塑座	PA46/PBT	1	BLACK	

图号: 2021.10.07

品名: ROH-6551 (带灯全塑)

审核: 日期:

料号: 5551-8Y00011P830 (WR42071)

批准: 日期:

型号: RJ45 图号:

日期:

角度: ±5° 版本: 1 of 1 单位:mm 比例: 1:1 纸张: A4