

FEATURES

- Small volume, high power density
- High efficiency, low output ripple and noise
- Low zero-load power consumption, low static current
- Long time short circuit protection and self-recovery
- superior thermal stability and temperature characteristics
- Wide temperature performance at full 1 watt load: -40°C ~ +85°C
- Isolation Voltage: 1500VDC
- High Reliability (MTTF ≥ 350 ten thousand hours)
- International standard SIP package, save PCB installation space
- Environmental design, ROHS compliant
- 100% full load aging



RoHS
Isolate/Non-stabilized
Single output

PRODUCT MODEL LIST

Order Code	Normal Input Voltage (V)		Normal Input Voltage		Efficiency [Typ] (%)	Capacitive Load [Max] (uF)
	Normal	Range	Voltage (V)	Current (mA)		
B0503SY-2WR1	5	4.5~5.5	3.3	606	82	3300
B0505SY-2WR1			5	400	84	2200
B0507SY-2WR1			7.2	278	86	2200
B0509SY-2WR1			9	222	88	2200
B0512SY-2WR1			12	167	88	1000
B0515SY-2WR1			15	133	88	1000
B0524SY-2WR1			24	83	87	1000
B1205SY-2WR1	12	10.8~13.2	5	400	86	2200
B1209SY-2WR1			9	222	86	2200
B1212SY-2WR1			12	167	88	2200
B1215SY-2WR1			15	133	90	2200
B1224SY-2WR1			24	83	87	1000
B1505SY-2WR1	15	13.5~16.5	5	400	86	2200
B1515SY-2WR1			15	133	90	2200
B1524SY-2WR1			24	83	87	1000
B2403SY-2WR1	24	21.6~26.4	3.3	606	80	2200
B2405SY-2WR1			5	400	86	2200
B2409SY-2WR1			9	222	90	2200
B2412SY-2WR1			12	167	90	2200
B2415SY-2WR1			15	133	90	2200
B2424SY-2WR1			24	83	89	1000

OUTPUT CHARACTERISTICS

Parameter	Conditions		Min.	Typ.	Max.	Units
Output Power			0.3		3	W
Line Voltage Regulation	Input voltage change $\pm 1\%$ at rated load			± 1.2	± 1.5	%
Load Regulation	Load varies from 10% to 100% at nominal input			10	15	
Quiescent Current	Output load is 0 at nominal input	B05XX	≤ 20			mA
		etc.	≤ 10			
Temps Drift Coefficient	Rated load				± 0.03	%/°C
Ripple & Noise	At 20MHz bandwidth			50	100	mVp-p
Switching Frequency	Rated input voltage			280		KHz
Output Short Circuit Protection	Sustainable and automatic restoration					

All Specifications Subject To Change Without Notice

Guangzhou Jetekps Electronic Co., Ltd Tel:020-32029926 Fax:020-32029926 www.jetekps.com



Input Filter	Filter capacitor
Hot Plug	Nonsupport
Output Voltage Accuracy	Refer to error envelope curve

Insulation Characteristic


Parameter	Conditions	Min.	Typ.	Max.	Units
Insulation Resistance	500VDC	1000			MΩ
Insulation Voltage	Test time 1 minute, leakage current less than 1 mA	1500			VDC

General Characteristic

Parameter	Conditions	Min.	Typ.	Max.	Units
Storage Humidity		5		95	%
Operating Temps		-40		85	°C
Storage Temps		-55		125	
Operating Case Temps			15	25	
Pin Welding Temps	Welding joint 1.5mm from case,10 seconds operation			300	
MTTF	MIL - HDBK - 217@25°C	350			10000 hours
Weight			2.4		g
Cooling	Free air convection				
Case Material	Flame-retardant and heat-resistant plastic (UL94-V0)				




Shape & Pin Dimensions

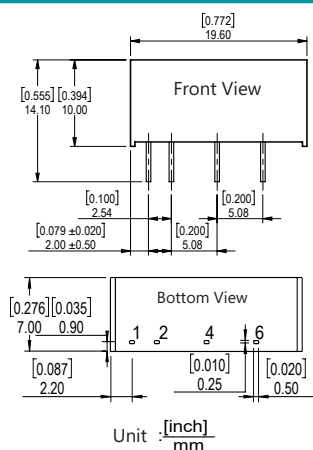


Pin	Function
1	Vin
2	GND
4	0V
6	+Vo

ps:
Terminal section tolerance: ± 0.10 [± 0.004]
Unmarked tolerance: ± 0.25 [± 0.010]


PCB



Package Dimensions



Basic Application Circuit

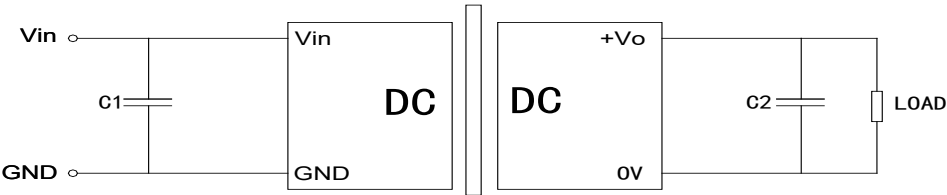

Options of C1、C2:

Input Voltage	External Capacitance	Output Voltage	External Capacitance
5VDC	10uF	3.3/5VDC	4.7uF
12VDC	4.7uF	7.2/9VDC	2.2uF
15VDC	2.2uF	12/15VDC	1uF
24VDC	1uF	24VDC	0.47uF


Note

Try To Avoid No-load Use: If the load power consumption is less than 10% of the rated output power of the module, it is recommended to connect a dummy load to the output terminal or select a module with a lower rated power. The dummy load (resistance) can be calculated by 10% of the rated power of the module, and the resistance value is $R=U^2 / (10\% \times 2W)$.

Avoid Excessive Output External Capacitance: The capacity value of the output external capacitor C2 should not be too large, otherwise it is easy to cause overcurrent or bad startup when the module is started. The specific value should be selected according to the external capacitor table.

The input of this series does not support parallel use of hot plug and output.

For situations requiring high ripple noise, external LC filter circuit should be connected, and the resonant frequency of LC filter should be far less than the switching frequency of DC/DC module to prevent mutual interference, resulting in output ripple increase or module damage, as shown in the figure:

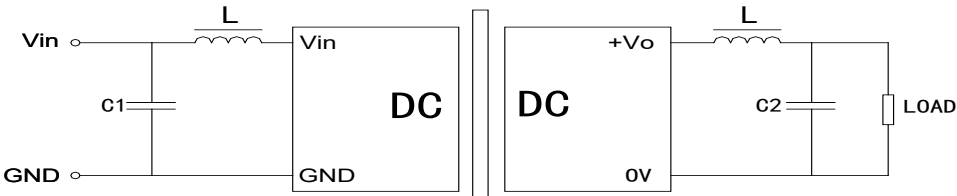

Naming Logic Of Constant Voltage Products

B 05 05 LS Y - 1W R1

