

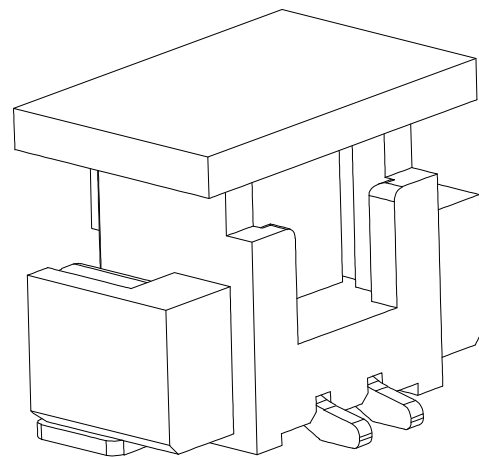
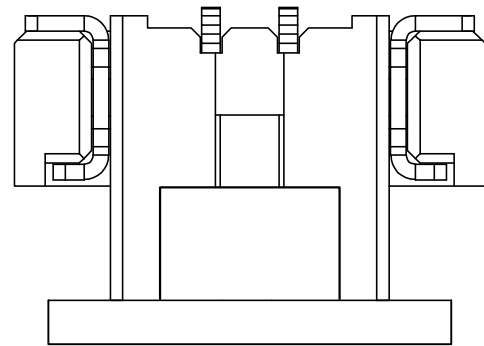
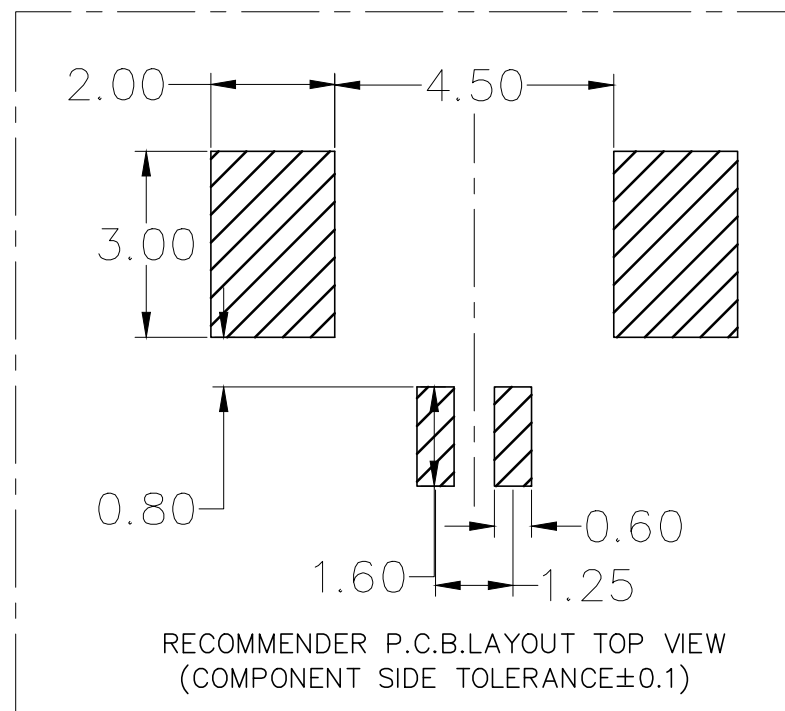
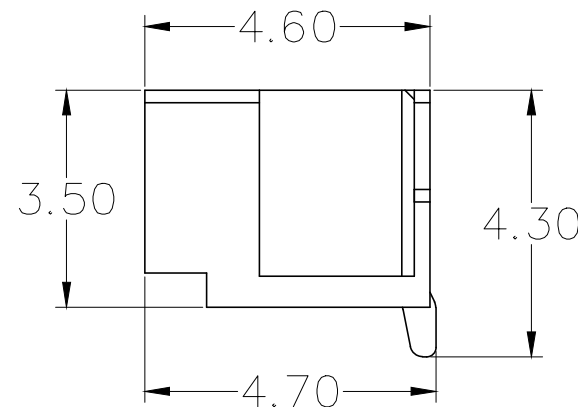
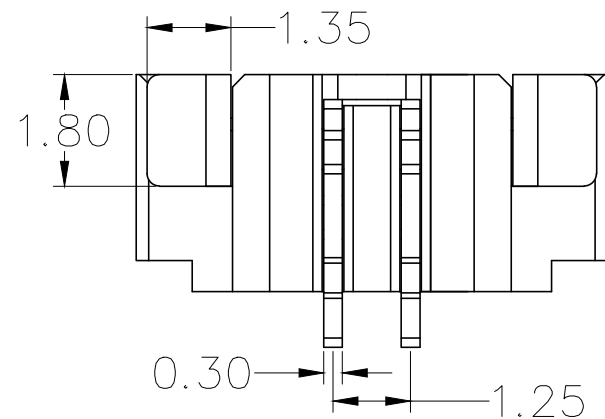


标 记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修 改 REVISE	日 期 DATE	核 准 APPROVE

PIN 数	A±0.1	B±0.1	C±0.1
2P	7.60	4.50	1.25
3P	8.85	5.75	2.50
4P	10.10	7.00	3.75
5P	11.35	8.25	5.00
6P	12.60	9.50	6.25

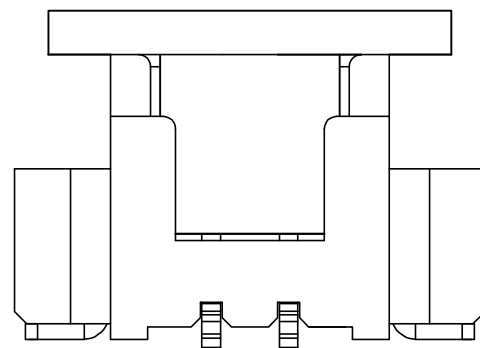

3D View

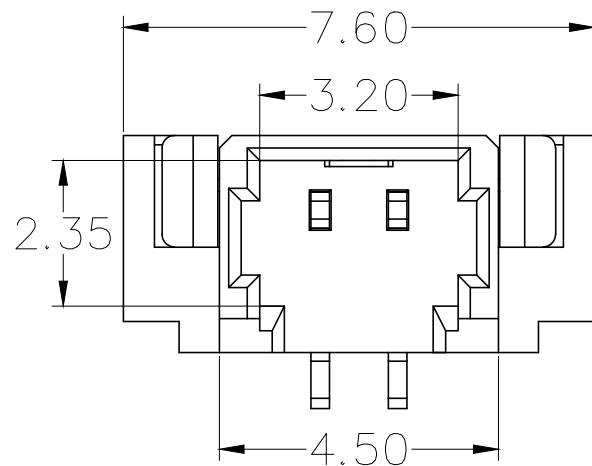

RECOMMENDER P.C.B.LAYOUT TOP VIEW
(COMPONENT SIDE TOLERANCE±0.1)

Specifications:

- 1.Rated Voltage : 125V AC/DC
- 2.Rated Current : 1A AC,DC
- 3.Withstand Voltage : 200V AC/minute
- 4.Contact Resistance : 50mΩ(MAX.)
- 5.Insulation Resistance : 100MΩ(MIN.)
- 6.Storage Temperature Range: -40℃~+85℃;
- 7.Operation Temperature Range: -25℃~+70℃;

2	插针	铜	镀镍锡	
1	基座	LCP	本色	
序 号	品 名	材 质	电镀/颜色	备 注



深圳市虹成电子有限公司

品 名 TITLE	针座		
料 号 PART NO	HCZZ0015G-6		

UNLESS OTHERWISE, GENERAL TOLERANCE:	比 列 SCALE	1:1		
X. xxx ±0.05	单 位 UNIT	MM	制 图 DRAW	AhYe
X. xx ±0.15	张 数 PART NO	1 OF 1	审 核 CHECKED	夏操云
X. x ±0.25	版 本 REV	A	批 准 APPROVE	赵亮亮
ANGULAR: X. xx° ±1° X. x° ±3° X. ° ±5°				

