


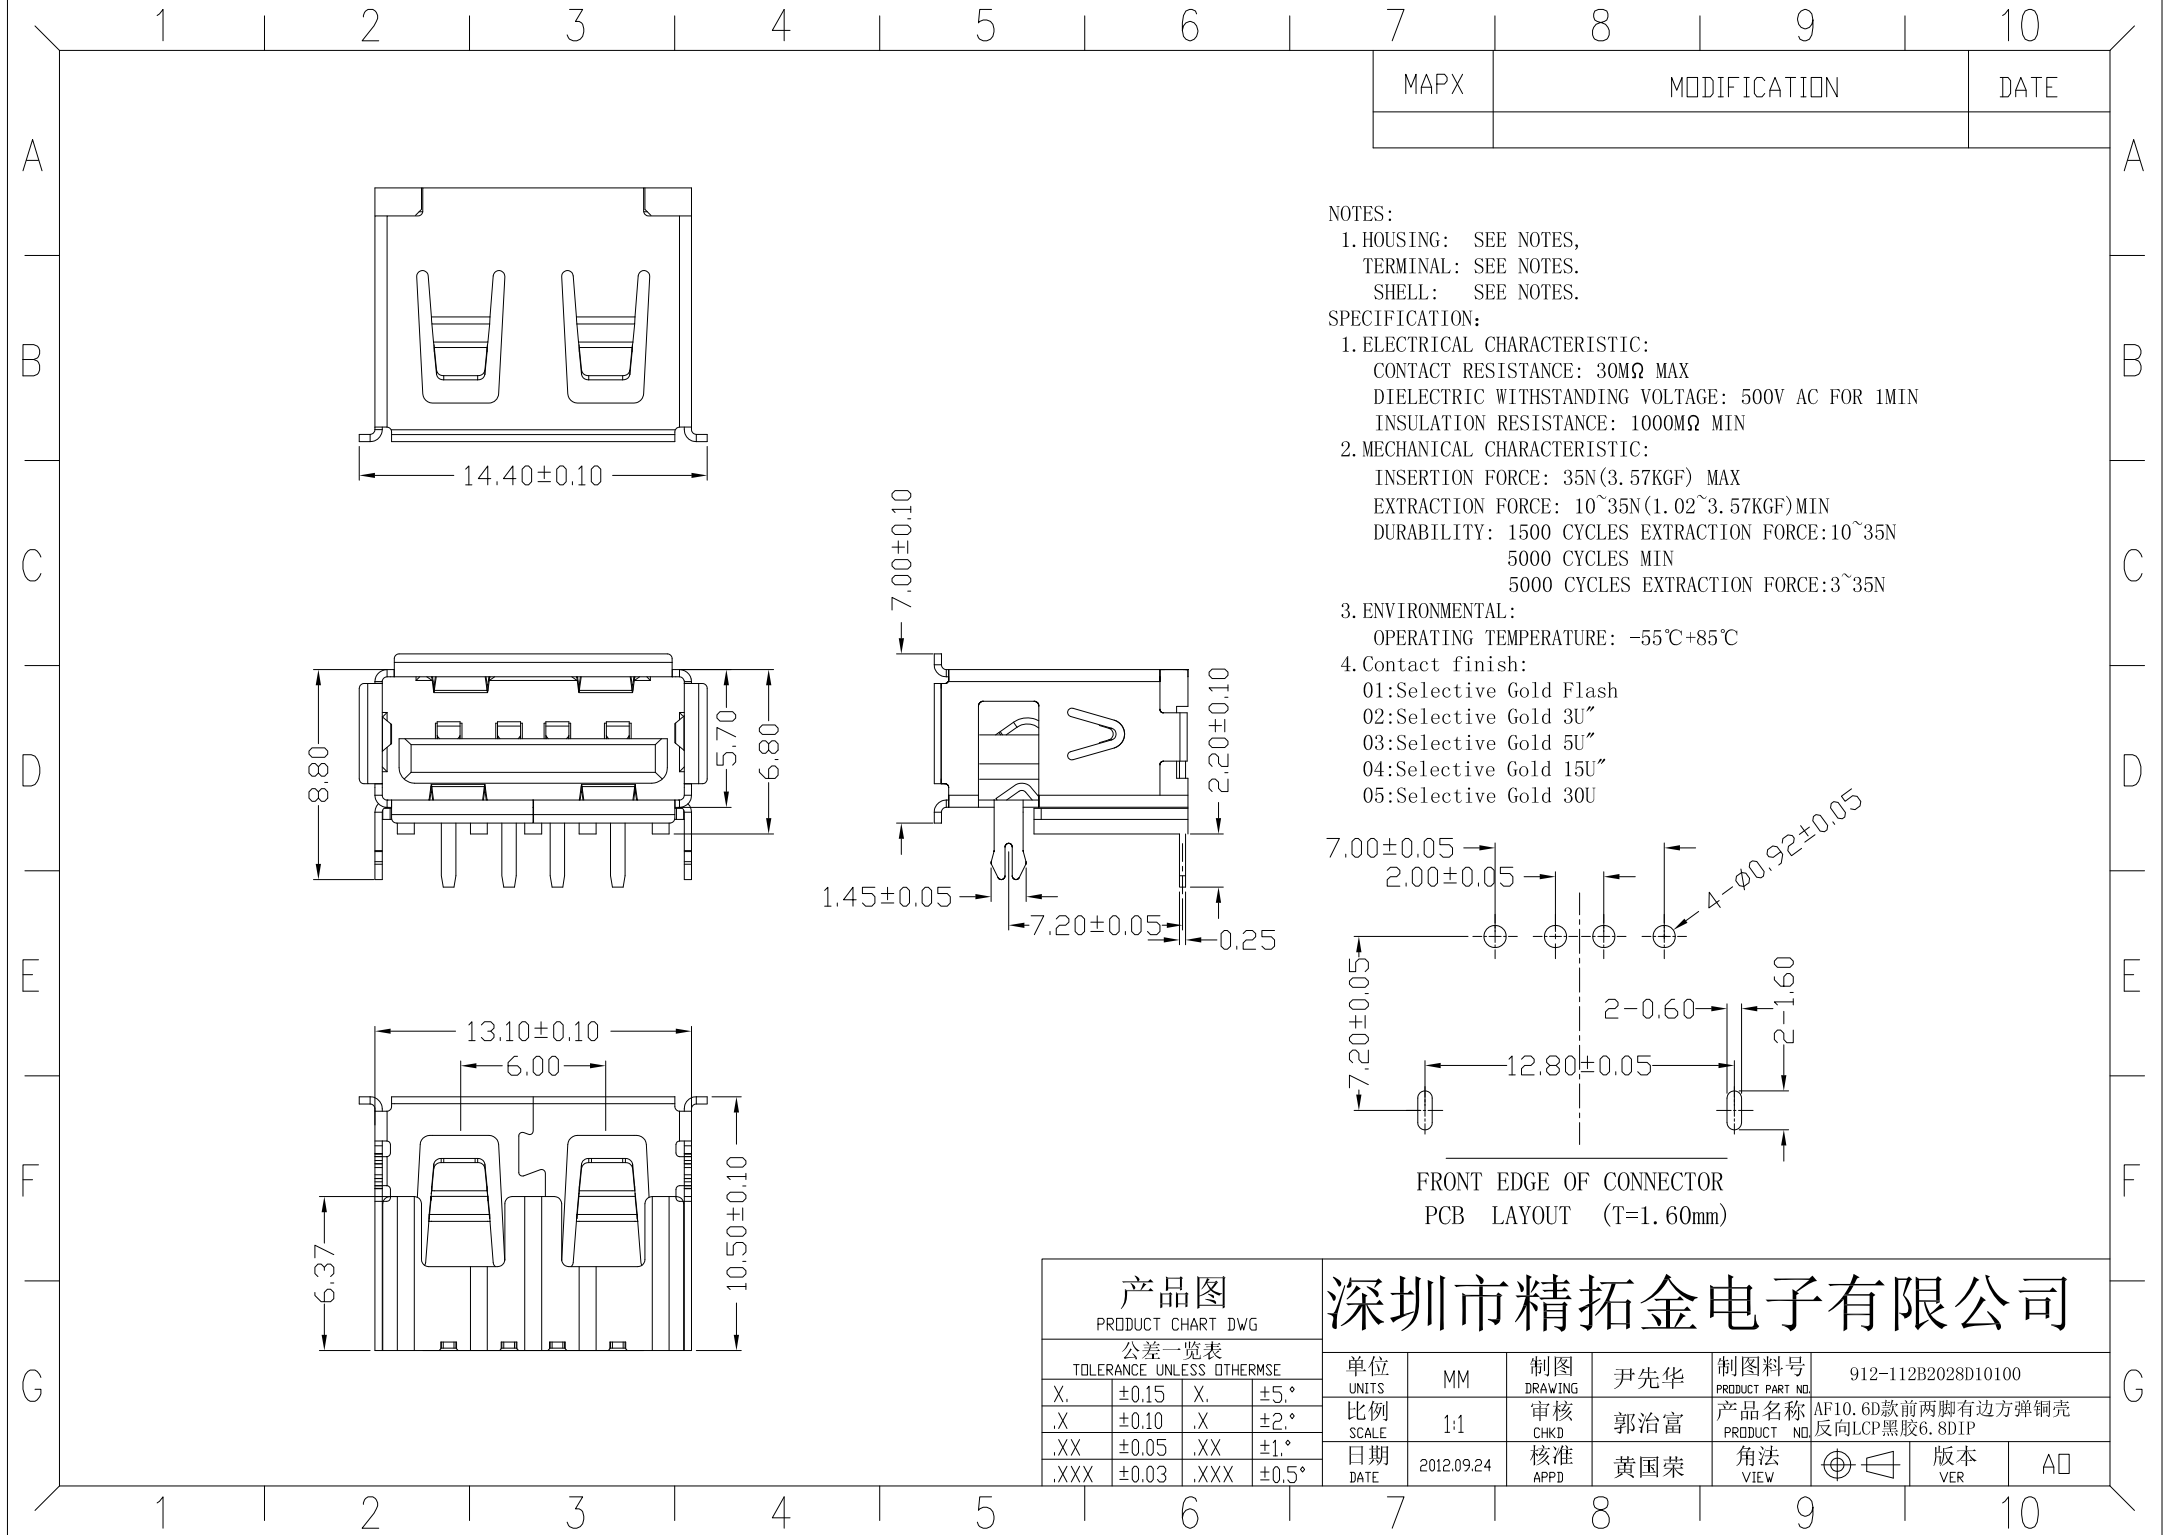

NOTES:

1. HOUSING: SEE NOTES,
TERMINAL: SEE NOTES.
SHELL: SEE NOTES.

SPECIFICATION:


1. ELECTRICAL CHARACTERISTIC:
CONTACT RESISTANCE: $30M\Omega$ MAX
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
INSULATION RESISTANCE: $1000M\Omega$ MIN
2. MECHANICAL CHARACTERISTIC:
INSERTION FORCE: 35N(3.57KGF) MAX
EXTRACTION FORCE: $10 \sim 35N(1.02 \sim 3.57KGF)$ MIN
DURABILITY: 1500 CYCLES EXTRACTION FORCE: $10 \sim 35N$
5000 CYCLES MIN
5000 CYCLES EXTRACTION FORCE: $3 \sim 35N$

3. ENVIRONMENTAL:

OPERATING TEMPERATURE: $-55^{\circ}C + 85^{\circ}C$

4. Contact finish:

- 01: Selective Gold Flash
02: Selective Gold 3U"
03: Selective Gold 5U"
04: Selective Gold 15U"
05: Selective Gold 30U"

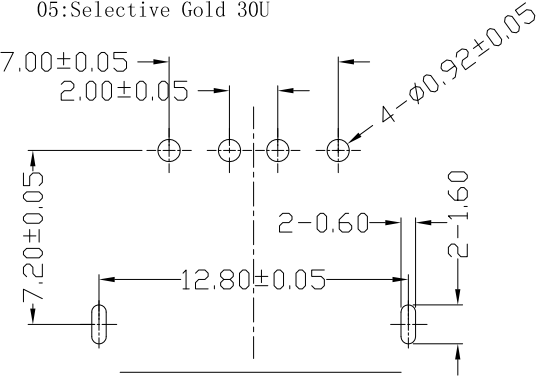

FRONT EDGE OF CONNECTOR
PCB LAYOUT (T=1.60mm)

产品图				深圳市精拓金电子有限公司					
PRODUCT CHART DWG									
公差一览表				单位	MM	制图	尹先华	制图料号	912-112B2028D10100
TOLERANCE UNLESS OTHERWISE				UNITS		DRAWING		PRODUCT PART NO.	
X.	± 0.15	X.	$\pm 5^{\circ}$	比例	1:1	审核	郭治富	产品名称	AF10. 6D款前两脚有边方弹铜壳
.X	± 0.10	.X	$\pm 2^{\circ}$	SCALE		CHKD		PRODUCT NO.	反向LCP黑胶6. 8D1P
.XX	± 0.05	.XX	$\pm 1^{\circ}$	日期	2012.09.24	核准	黄国荣	角法	
.XXX	± 0.03	.XXX	$\pm 0.5^{\circ}$	DATE		APPD		VIEW	
								版本	AD
								VER	