


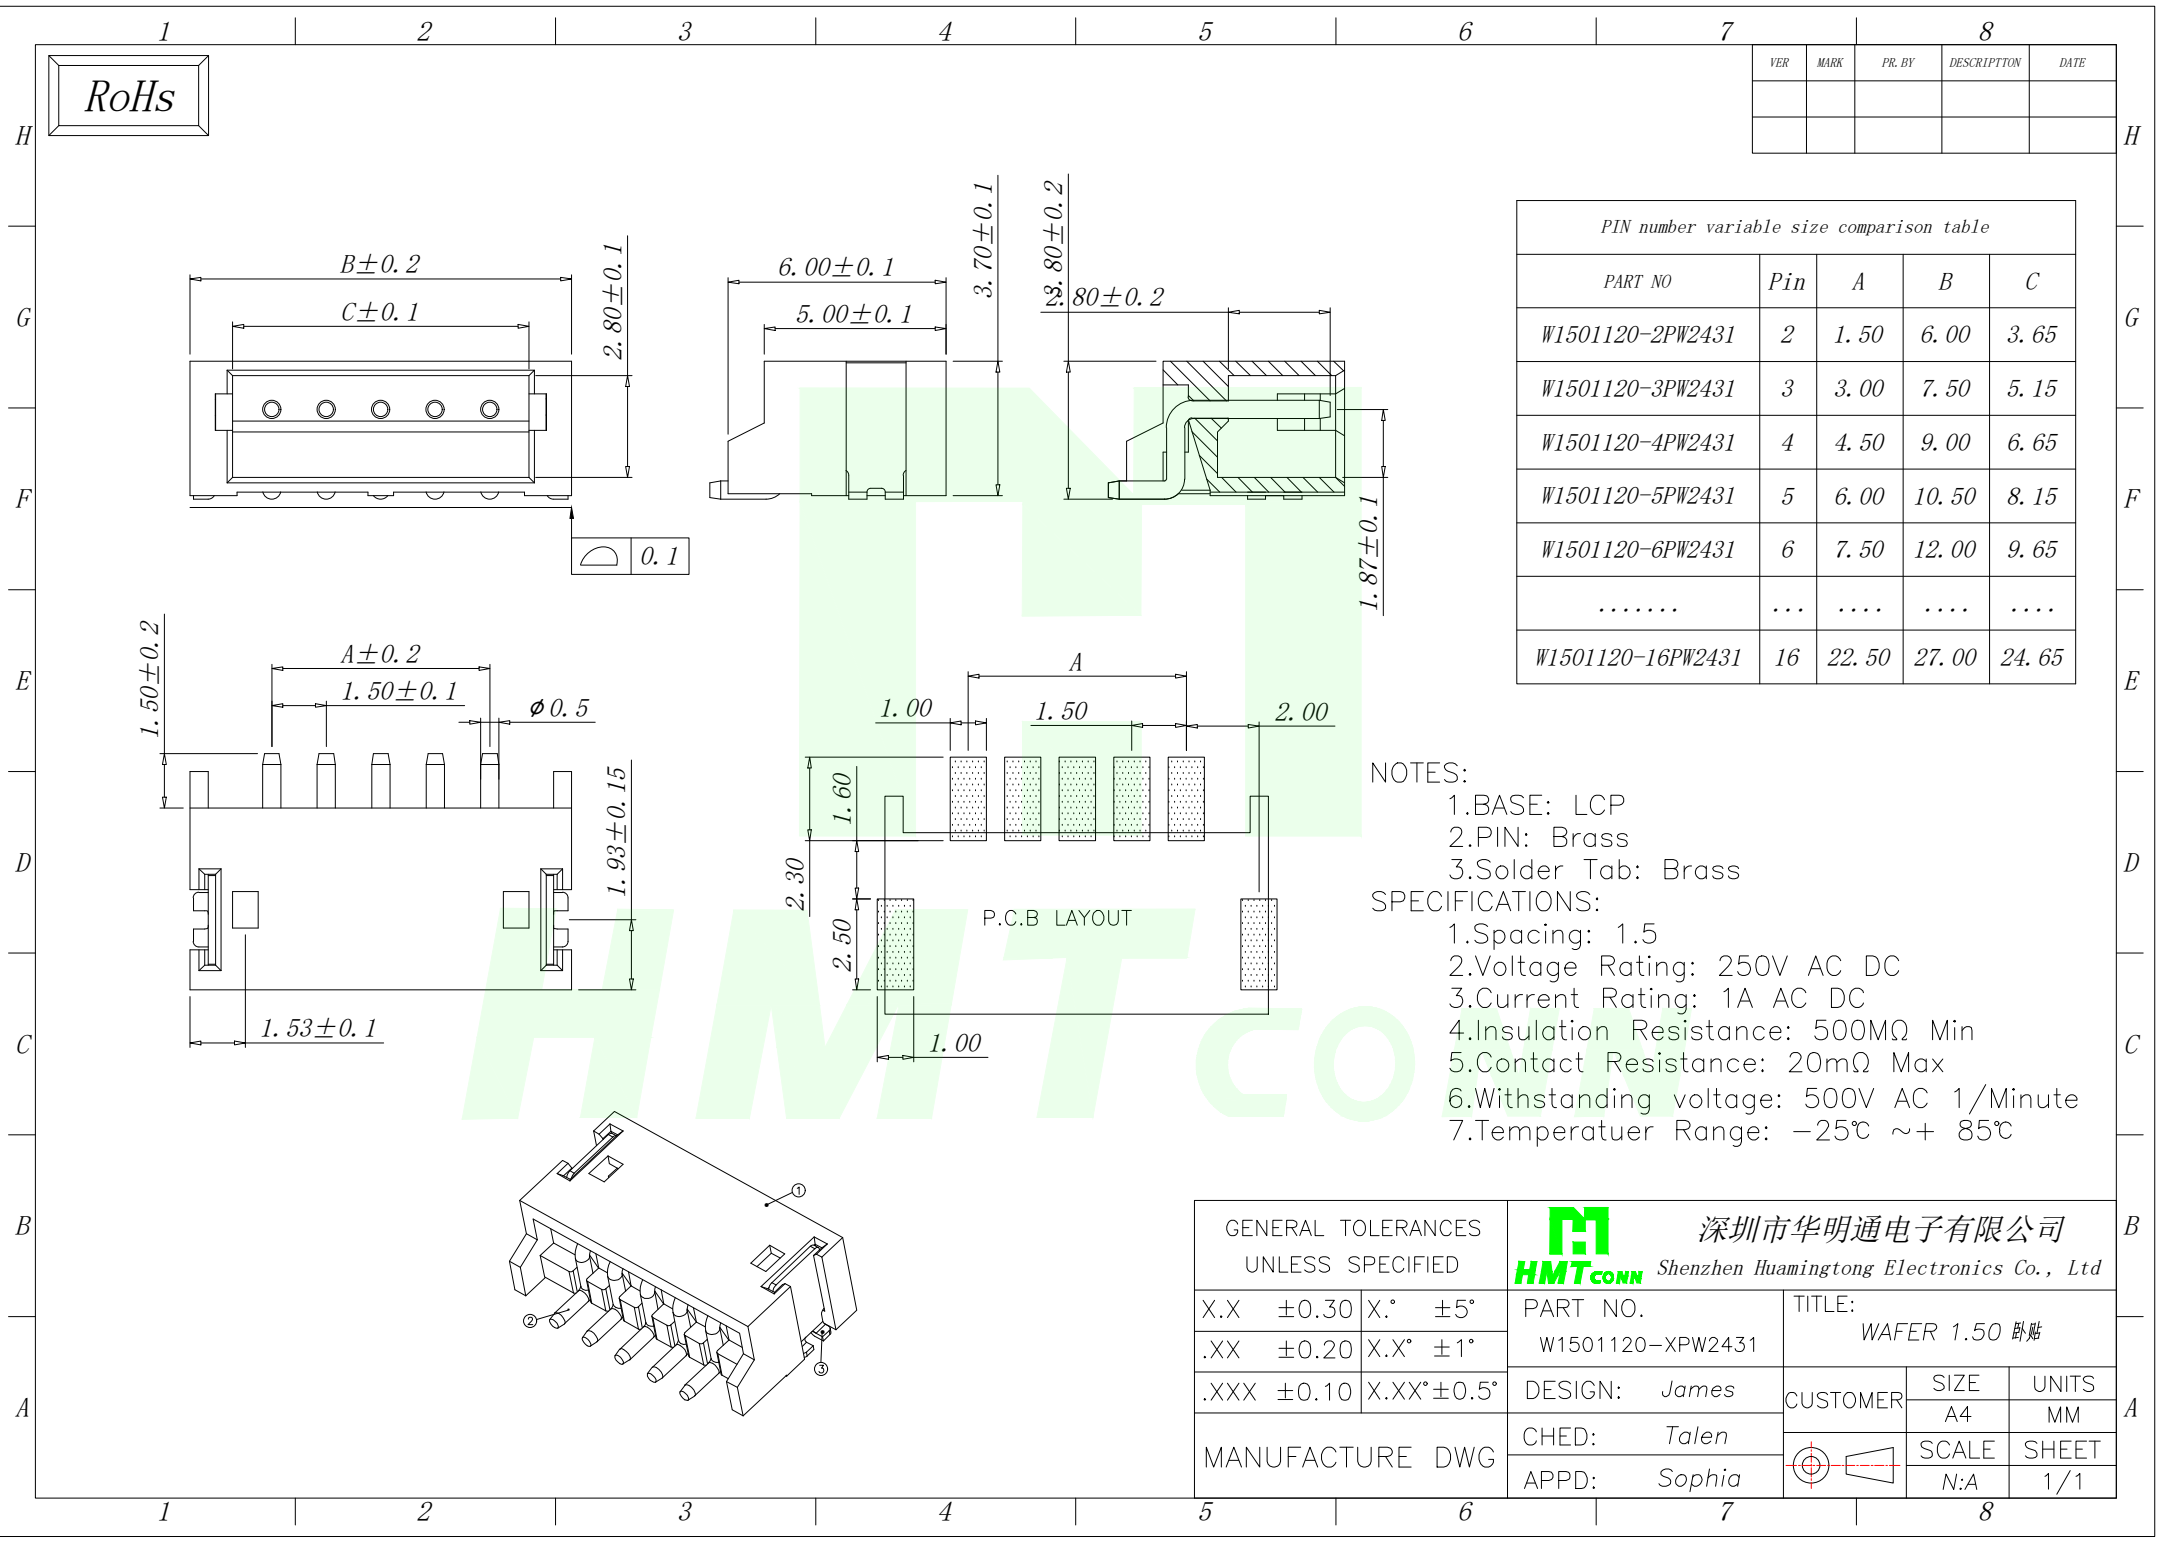


RoHS

VER	MARK	PR. BY	DESCRIPTION	DATE

PIN number variable size comparison table				
PART NO	Pin	A	B	C
W1501120-2PW2431	2	1.50	6.00	3.65
W1501120-3PW2431	3	3.00	7.50	5.15
W1501120-4PW2431	4	4.50	9.00	6.65
W1501120-5PW2431	5	6.00	10.50	8.15
W1501120-6PW2431	6	7.50	12.00	9.65
.....	...			
W1501120-16PW2431	16	22.50	27.00	24.65

- NOTES:
- 1.BASE: LCP
 - 2.PIN: Brass
 - 3.Solder Tab: Brass
- SPECIFICATIONS:
- 1.Spacing: 1.5
 - 2.Voltage Rating: 250V AC DC
 - 3.Current Rating: 1A AC DC
 - 4.Insulation Resistance: 500MΩ Min
 - 5.Contact Resistance: 20mΩ Max
 - 6.Withstanding voltage: 500V AC 1/Minute
 - 7.Temperatuer Range: -25℃ ~+ 85℃

GENERAL TOLERANCES UNLESS SPECIFIED		 深圳市华明通电子有限公司 Shenzhen Huamingtong Electronics Co., Ltd	
X.X ±0.30	X.° ±5°	PART NO.	TITLE:
.XX ±0.20	X.X° ±1°	W1501120-XPW2431	WAFER 1.50 卧贴
.XXX ±0.10	X.XX° ±0.5°	DESIGN: James	CUSTOMER
MANUFACTURE DWG		CHED: Talen	SIZE A4
		APPD: Sophia	UNITS MM
			SCALE N:A
			SHEET 1/1