

## STRADA-IP-2X6-PX

Double asymmetric beam designed to highlight pedestrian crossings for right side traffic

### SPECIFICATION:

|                            |                 |
|----------------------------|-----------------|
| Dimensions                 | 173.0 x 71.4 mm |
| Height                     | 9.6 mm          |
| Fastening                  | pin, screw      |
| Ingress protection classes | IP67            |
| ROHS compliant             | yes ⓘ           |




### MATERIALS:

| Component        | Type       | Material | Colour | Finish |
|------------------|------------|----------|--------|--------|
| STRADA-IP-2X6-PX | Multi-lens | PMMA     | clear  |        |
| 2X6-SEAL25       | Seal       | Silicone | white  |        |

### ORDERING INFORMATION:

| Component                      |            | Qty in box | MOQ | MPQ | Box weight (kg) |
|--------------------------------|------------|------------|-----|-----|-----------------|
| CS16401_STRADA-IP-2X6-PX       | Multi-lens | 120        | 40  | 40  | 7.7             |
| » Box size: 476 x 273 x 247 mm |            |            |     |     |                 |

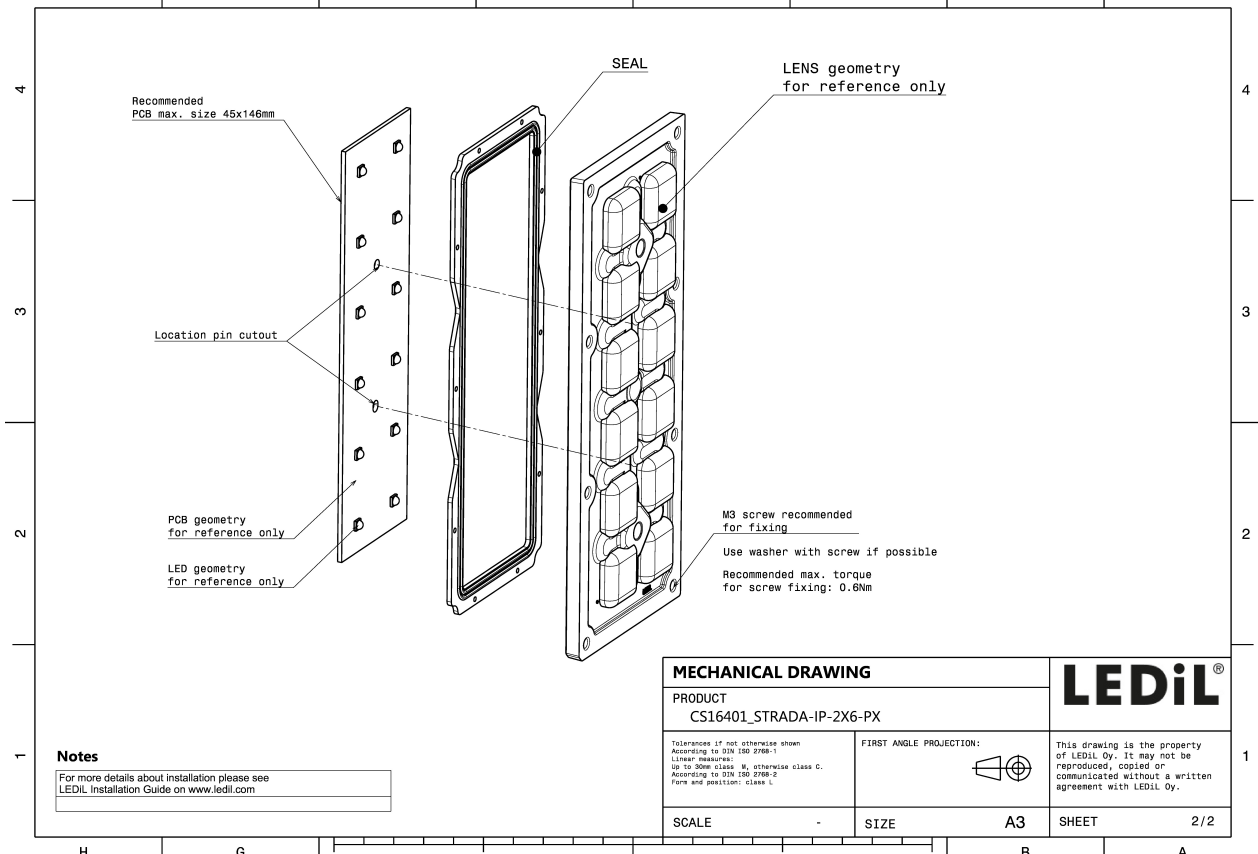


2/11


#### OPTICAL RESULTS (MEASURED):




LED QUICK FLUX 2x6 LED XG xxx G7+  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

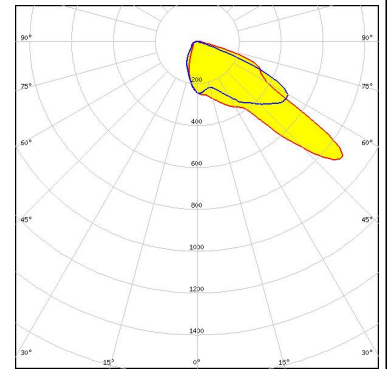


LED QUICK FLUX 2x6 LED XT xxx G5  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 1.1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

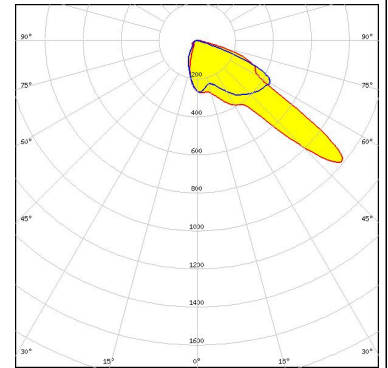

LED XP-G2  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 1.2 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

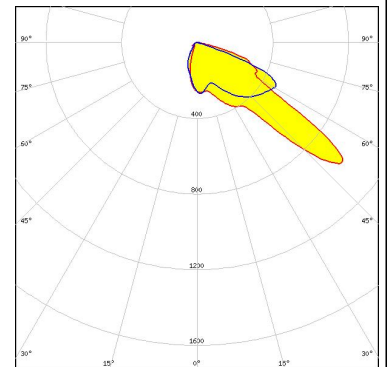


LED XP-G3  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

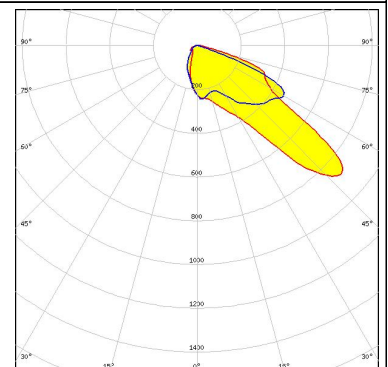


#### OPTICAL RESULTS (MEASURED):




LED XP-L2  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.8 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

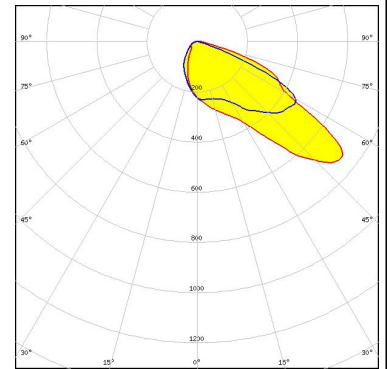


LED XT-E HE  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 1.1 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

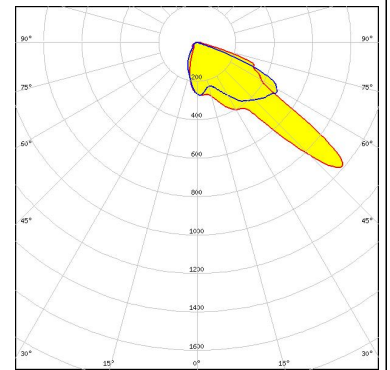

LED LUXEON 5050 Round LES  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

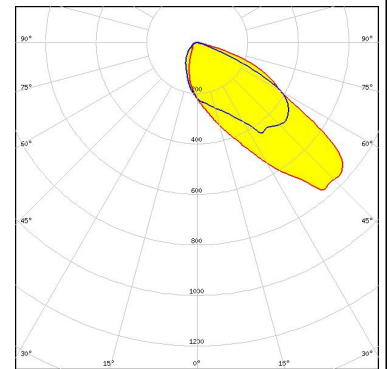


LED NVSW219F  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 1 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

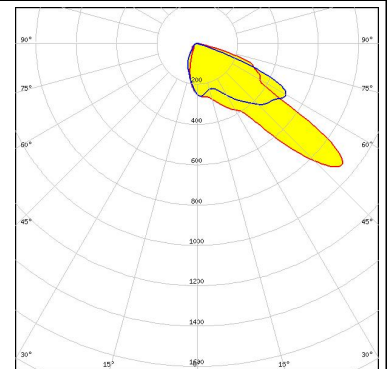


#### OPTICAL RESULTS (MEASURED):




LED NVSW319B  
FWHM / FWTM Asymmetric  
Efficiency %  
Peak intensity 1 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

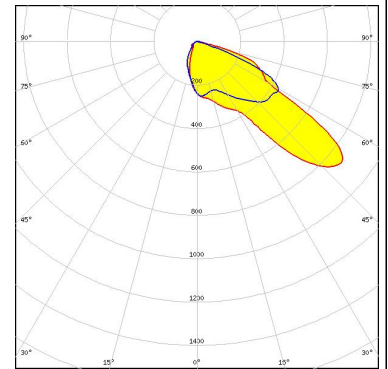


LED NVSW519A  
FWHM / FWTM Asymmetric  
Efficiency 95 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

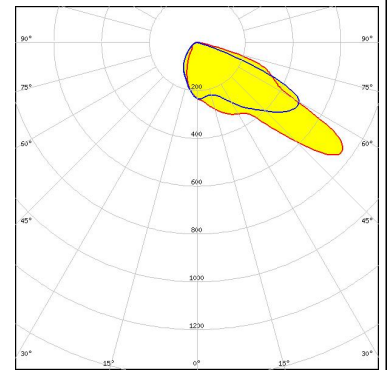

LED Duris S8  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

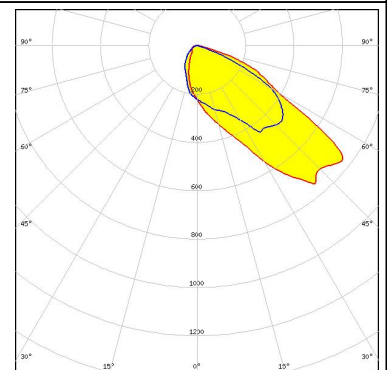


LED OSLON Square CSSRM2/CSSRM3  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 1.2 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

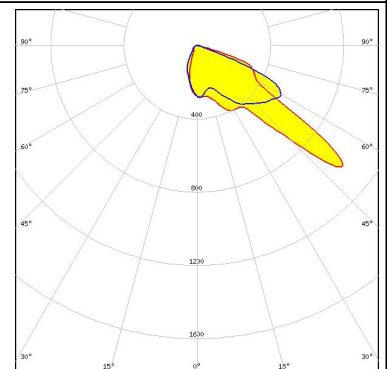

#### OPTICAL RESULTS (MEASURED):


#### SAMSUNG

LED HiLOM RH12 (LH351C)  
 FWHM / FWTM Asymmetric  
 Efficiency 97 %  
 Peak intensity 1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

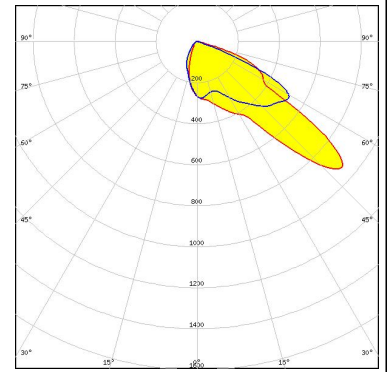


#### SAMSUNG

LED HiLOM RM12 ZP (LH502C)  
 FWHM / FWTM Asymmetric  
 Efficiency 96 %  
 Peak intensity 0.9 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

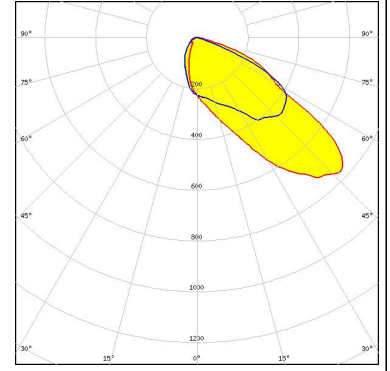


#### SCIOLUX

LED ROY-S26XPL2 (XP-L2)  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.8 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

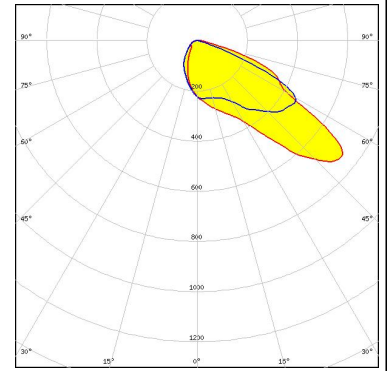

#### SCIOLUX


LED XLE-S22C4XTEHE (XT-E HE)  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 1.1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

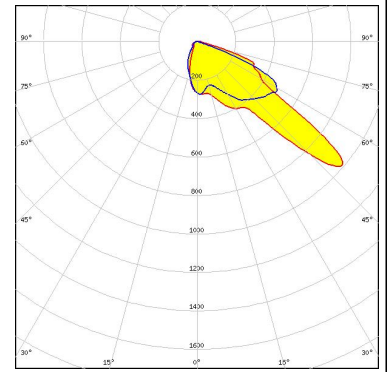

#### OPTICAL RESULTS (MEASURED):


##### SCIO LUX

LED XLE-S26XHP35 (XHP35 HD)  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.8 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

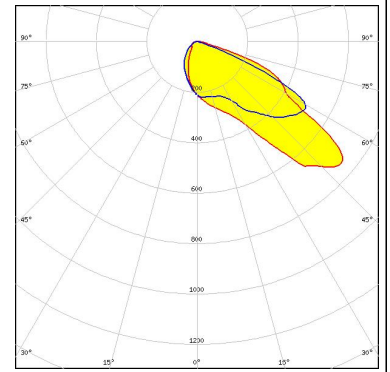


##### SEOUL SEMICONDUCTOR

LED SMJQ-D36W12Mx  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 1.1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

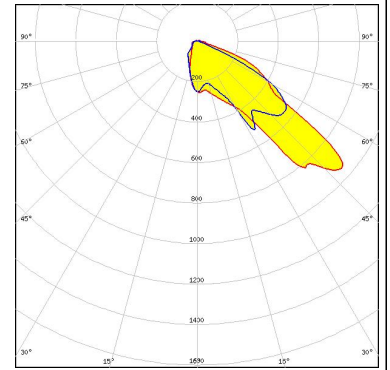


##### SEOUL SEMICONDUCTOR

LED Z5M3  
 FWHM / FWTM Asymmetric  
 Efficiency 96 %  
 Peak intensity 1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

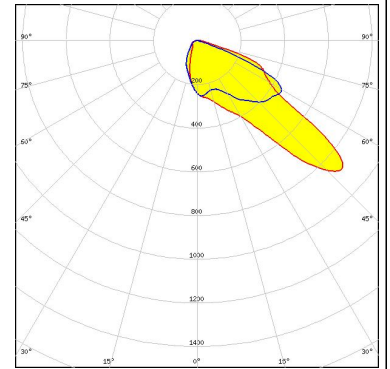

##### TRIDONIC


LED RLE 2x6 3000lm HP EXC2 OTD  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 1.2 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

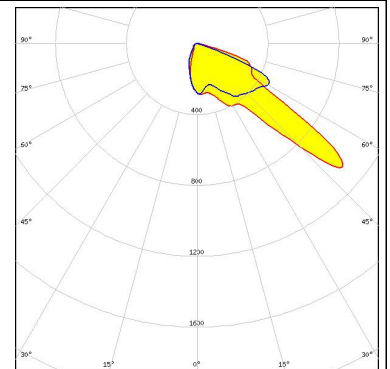


#### OPTICAL RESULTS (SIMULATED):




LED XHP35 HD  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

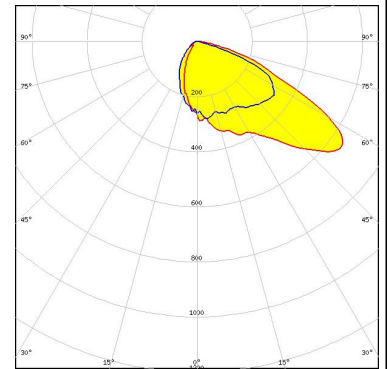


LED XP-G2 HE  
FWHM / FWTM Asymmetric  
Efficiency 93 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

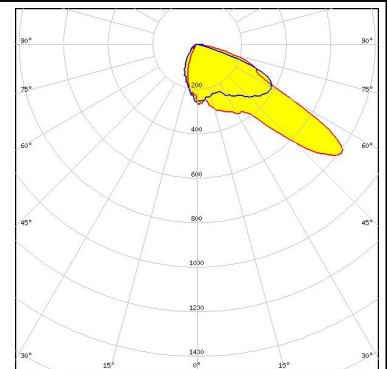

LED XT-E  
FWHM / FWTM Asymmetric  
Efficiency 90 %  
Peak intensity 0.8 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

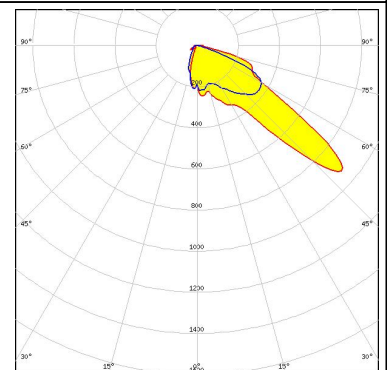


LED LUXEON 5050 Square LES  
FWHM / FWTM Asymmetric  
Efficiency 95 %  
Peak intensity 0.8 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

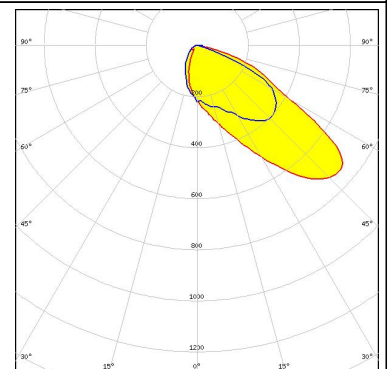


#### OPTICAL RESULTS (SIMULATED):




LED NV4WB35AM  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.9 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

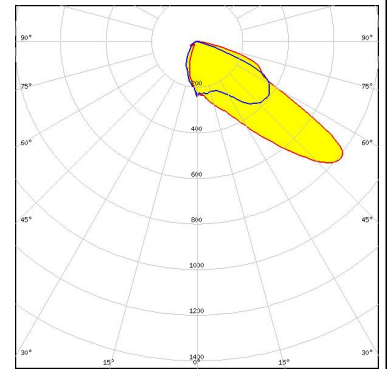


LED PrevaLED Brick HP IP 2x6  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

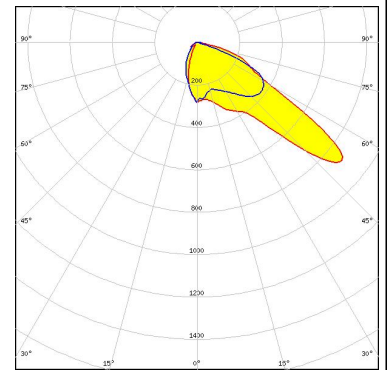




LED LH351B  
 FWHM / FWTM Asymmetric  
 Efficiency 95 %  
 Peak intensity 1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

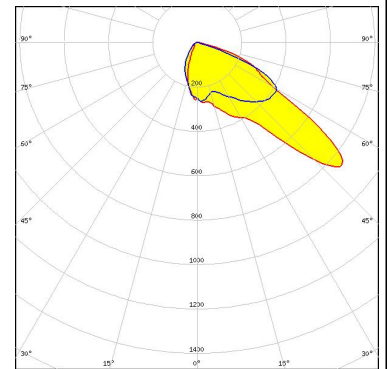

LED SEOUL DC 5050 6V  
 FWHM / FWTM Asymmetric  
 Efficiency 95 %  
 Peak intensity 0.8 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

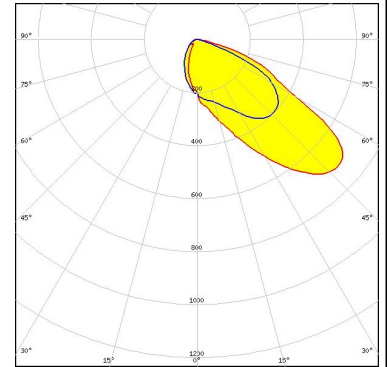

#### OPTICAL RESULTS (SIMULATED):
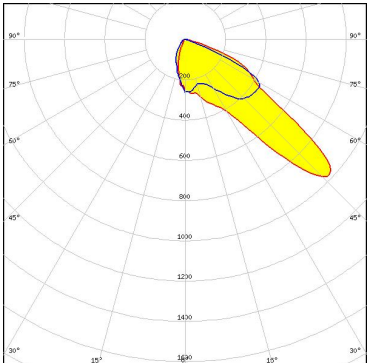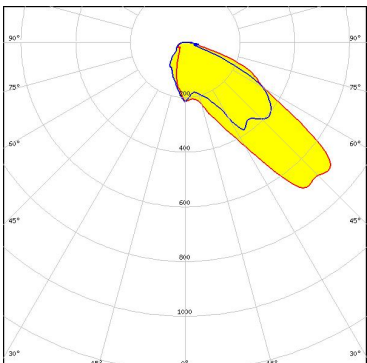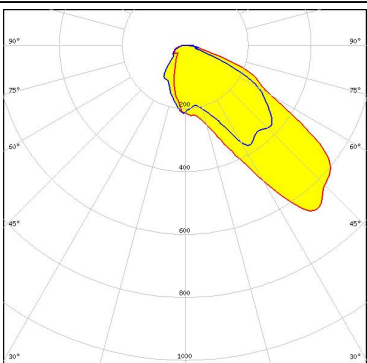
|                                                                                                                                                                                                                        |                                                                                       |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <p><b>SEOUL SEMICONDUCTOR</b></p> <p>LED Z5M4</p> <p>FWHM / FWTM Asymmetric</p> <p>Efficiency 95 %</p> <p>Peak intensity 1.1 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>  |    |
| <p><b>SEOUL SEMICONDUCTOR</b></p> <p>LED Z8Y19</p> <p>FWHM / FWTM Asymmetric</p> <p>Efficiency 92 %</p> <p>Peak intensity 0.8 cd/lm</p> <p>LEDs/each optic 4</p> <p>Light colour White</p> <p>Required components:</p> |   |
| <p><b>SEOUL SEMICONDUCTOR</b></p> <p>LED Z8Y22</p> <p>FWHM / FWTM Asymmetric</p> <p>Efficiency 93 %</p> <p>Peak intensity 0.8 cd/lm</p> <p>LEDs/each optic 4</p> <p>Light colour White</p> <p>Required components:</p> |  |

### GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 13  
FI-24240 SALO  
Finland

#### LEDiL Inc.

228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

#### Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405 , Block B  
Casic Motor Building  
Shenzhen 518057  
P.R.CHINA

#### Local sales and technical support

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

#### Shipping locations

Salo, Finland  
Hong Kong, China

#### Distribution Partners

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)