



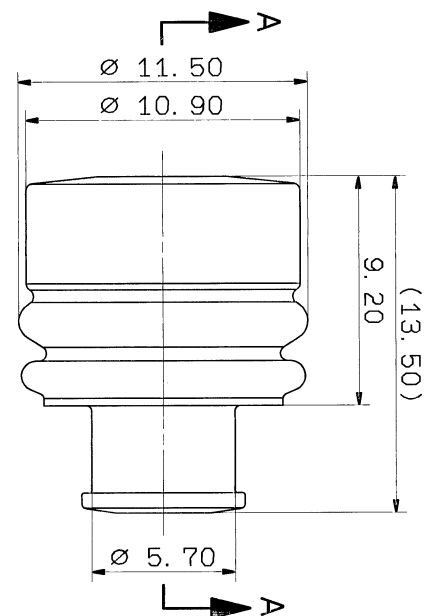

RUBBER PART GENERAL TOLERANCE				
PART DIM.	1	2	③	
0 TO 3	± 0.2	± 0.3	± 0.4	
3 TO 6	± 0.2	± 0.4	± 0.5	
6 TO 10	± 0.3	± 0.5	± 0.6	
10 TO 18	± 0.3	± 0.6	± 0.8	
18 TO 30	± 0.4	± 0.8	± 1.0	
30 TO 50	± 0.5	± 1.0	± 1.5	
50 TO 80	± 0.6	± 1.2	± 2.0	
80 TO 120	± 0.7	± 1.4	± 2.5	
120 TO 180	± 0.8	± 1.6	± 3.0	
180 TO 250	± 1.0	± 2.0	± 4.0	
250 TO 315	± 1.2	± 2.5	± 5.0	
315 TO 400	± 1.5	± 3.0	± 6.0	
400 TO 500	± 1.8	± 3.5	± 7.0	
500 OVER	± 0.4 %	± 0.8 %	± 1.5 %	


法記

1. 適用電線サイズ : 標準仕以外径 Ø4. 40とする。

NOTE

1. APPLICABLE WIRE SIZE : NOMINAL DIAMETER OF

FINISHED CABLE Ø4. 40.



SEC. A-A

95. 10. 23		NEW, ☒	C95-M403	K. O	CUSTOMER		CUSTOMER PART NO.		CUSTOMER DWG NO.		MATL. SILICONE RUBBER	TREAT. & FIN.	ISSUE MARK
LET DATE		REVISION RECORD			OFFICE		TRIAL PART NO.		NAME		312 RUBBER STOPPER		
GENERAL TOLERANCE		NO.			CHKD	VENDOR		PART NO.		7158-3023, ☒			
10MAX 50MAX 100MAX 250MAX 250QVR		ANGLE			ECCENT	DWG TYPE		DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE	PART NO.
A ±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1	R	NEW	95. 10. 23	mm	5/1	3	CH. CODE
B ±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	APPROVED	CHECKED	CHECKED	DESIGN	DRAWN		DWG NO.
C ±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15	山本 裕幸	山本 裕幸	山本 裕幸	MAEDA	SAMUKAWA		7158-3023:R
SPECIFIED		MASS				9	95. 11. 13	95. 10. 31	95. 10. 10	94. 09. 15	95. 10. 23	YAZAKI CORPORATION	