
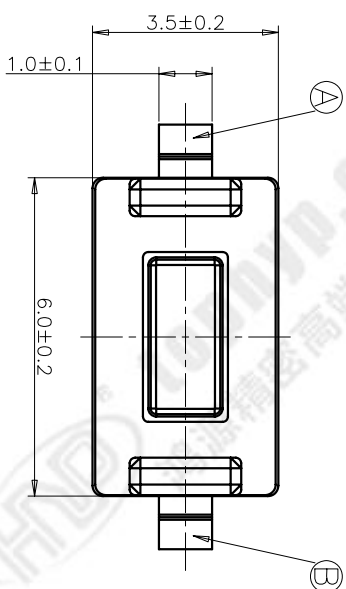


CIRCUIT DIAGRAM


回路图

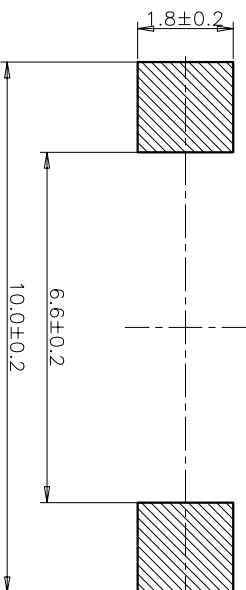

RECOMMENDED P.C.B. LAYOUT

安装尺寸图

规格 Specifications		
额定负荷 Rating	DC 12V/50mA	
接触电阻 Contact Resistance	100mΩ max.	
绝缘电阻 Insulation resistance	DC100V 60S 100MΩ min.	
抗电强度 Dielectric strength	AC250V(50~60HZ) 60S min.	
操作力 Operation force	180±30gf	
寿命试验 Operating Life	150,000 cycles	
行程 Travels	0.25±0.1mm	

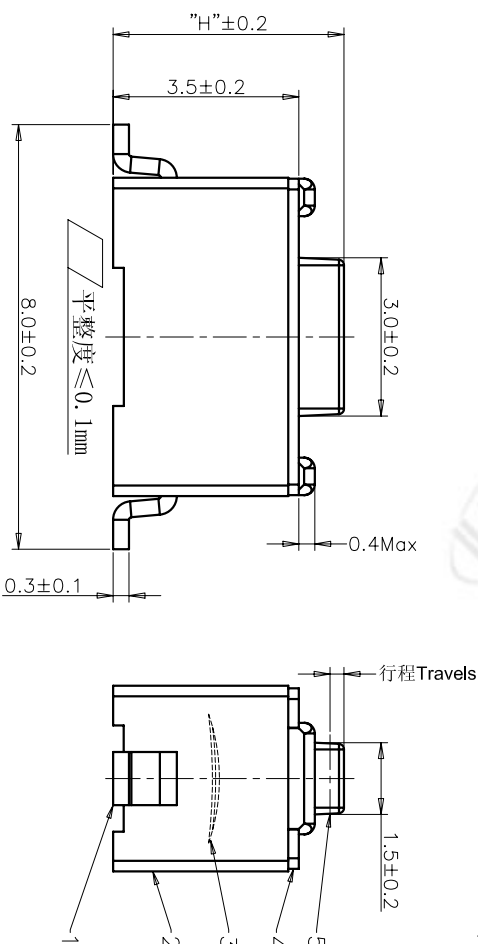

PRODUCT NO.: 1TS002B****-*****A2 - CT

- 轻触开关
- 3X6系列
- 外形:
- A=插脚
- B=贴片
- C=贴片带柱
- E=贴片2.5高
- K=贴片带柱8.8
- L=贴片10.2
- 按钮颜色:
- 底座颜色:
- 盖板颜色:
- 操作力度:
- 手感:
- 产品高度 (H):
- 材质:
- 0=Pb66
- 1=LCP+PPA
- 2=LCP
- 3=LCP+PPA(双弹片)
- 4=新增材质
- 依次增加
- 编带
- 非编带, 不启用
- 初始颜色
- 则不启用
- 130=130gf
- 160=160gf
- 180=180gf
- 220=220gf
- 250=250gf
- 260=260gf
- 300=300gf
- 0=常规
- 1=大手感
- 2=小手感
- 3=特殊手感
- 430=4.3mm
- 500=5.0mm

ITEM	PART NAME	QUANTITY	MATERIAL	FINISH
5	ACTUATOR	1	LCP	WHITE
4	COVER	1	STAINLESS STEEL	NATURAL
3	DOVE	1	STAINLESS STEEL	Ag-PLATED
2	HOUSING	1	PPA	WHITE
1	TERMINAL	1	BRASS	Ag-PLATED
ITEM	PART NAME	QUANTITY	MATERIAL	FINISH
X. ± 0.3	X' ± 3'	UNITS	MM	
X. ± 0.2	X' ± 2'	MATL		
.XX ± 0.1	.XX' ± 1'			
.XXX ± 0.05	.XXX' ± 0.5'	FINISH		
NAME(INTENDED USE)	HON YUAN			
3X6 SMT SERIES	HON YUAN PRECISION IND. CO.,LTD.			
TACT SWITCH	SHENZHEN, CHINA, R.O.C.			
PART NO.(INTENDED USE)	TITLE:			
1TS002B-1800-5001A2	PRODUCT DRAWING			
APPD:	ZO 2012/2/12	DWG NO.:	1TS002B-1800-5001A2-CT	
CHKD:	M.H.Li 2012/2/12	SCALE	SHEET	REV.
DR:	WP.LU 2012/2/12	10/1	1/1	A

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HON YUAN PRECISION IND. CO., LTD. AND SHALL NOT BE REPRODUCED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF HON YUAN PRECISION IND. CO., LTD.