

4

3

2

1

D

D

C

C

B

B



A

A

NOTES:

1. RATING: 5A125/250VAC.
2. OPERATING FORCE: 10~100gf
3. CONTACT RESISTANCE: <50mΩ
4. INSULATION RESISTANCE: >100MΩ (500VDC BETWEEN OPEN CONTACTS)
5. DIELECTRIC STRENGTH: >1500Vac 0.5mA 1 MINUTE
6. COLOR: BLACK

TEL:0769-82310510-867

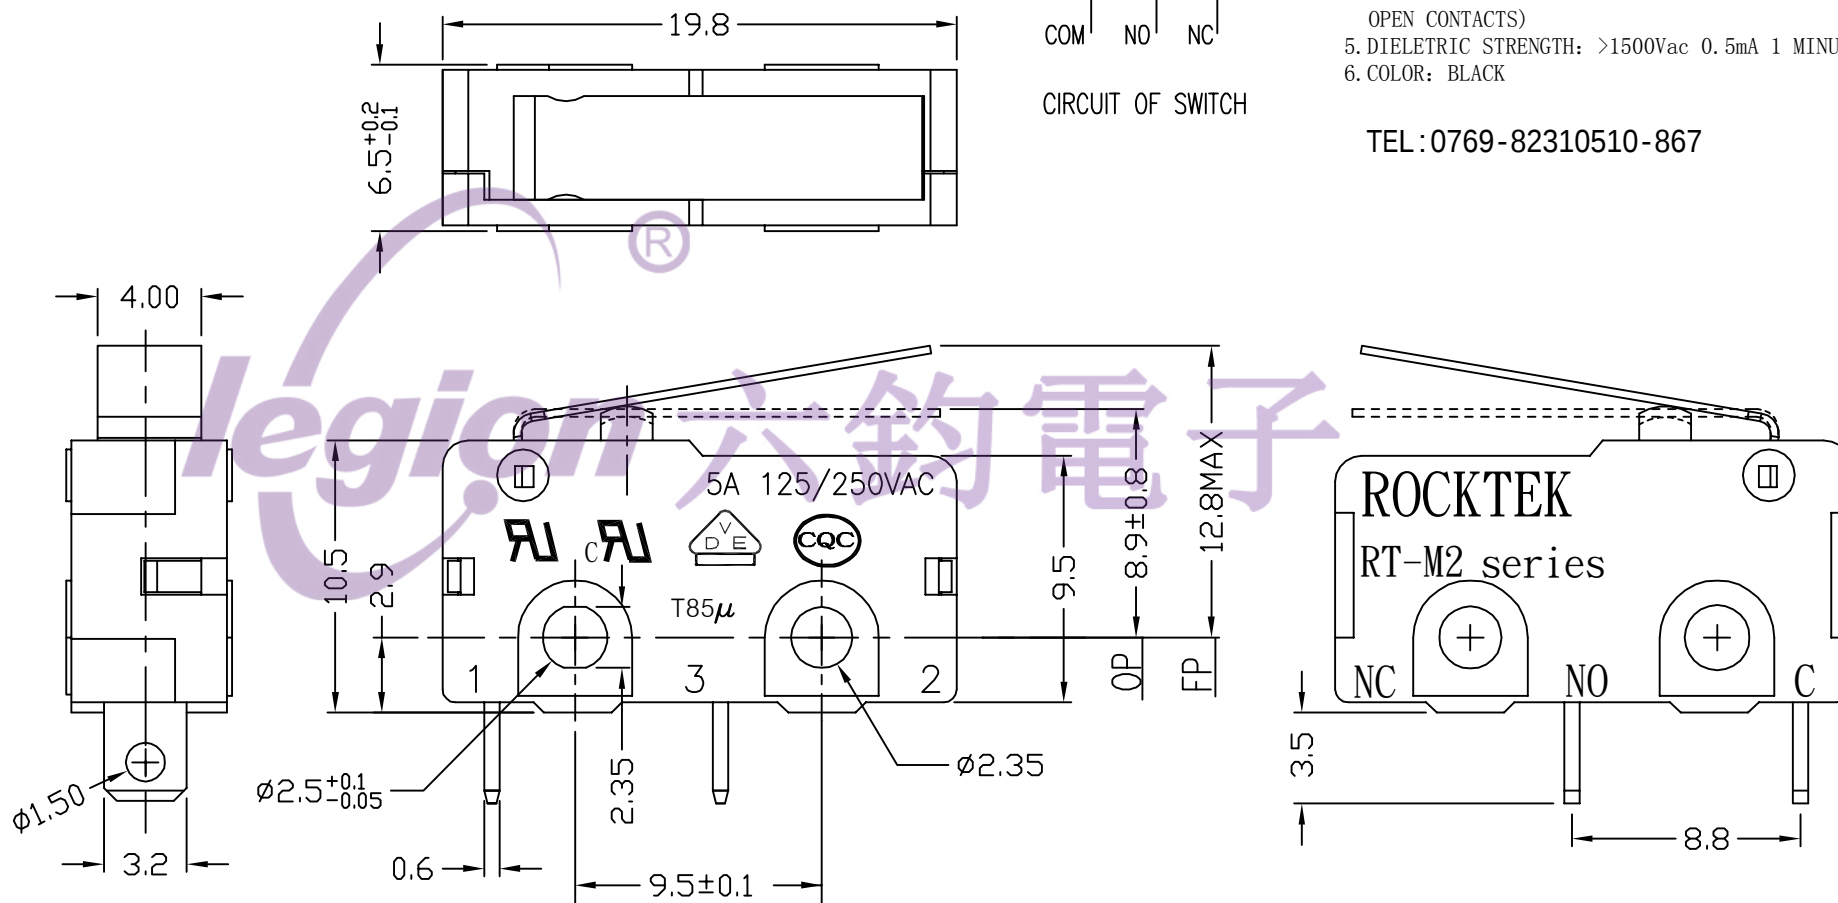

5	→	10	→	DIMENSIONAL TOLERANCES		APPROVED	CHECKED	DESIGN	DRAWN	ALL SIZE ARE IN	MM		
4	→	9	→	RANGE	TOLERANCE			LMC	LMC	SCALE	FIT		
3	→	8	→	X	±0.4				2016.07.27	MAT'L	***		
2	→	7	→	X.X	±0.3	ROCK TEK ELECTRICAL(SHENZHEN) CO.,LTD.				MATERIAL NO.		DRAWING NO.	REV
1	→	6	→	X.XX	±0.2					RTM2-1C4S05C200		WIF116005	A
NO	DESCRIPTION	NO	DESCRIPTION	ANGLES	±0.5°								

4

3

2

1