

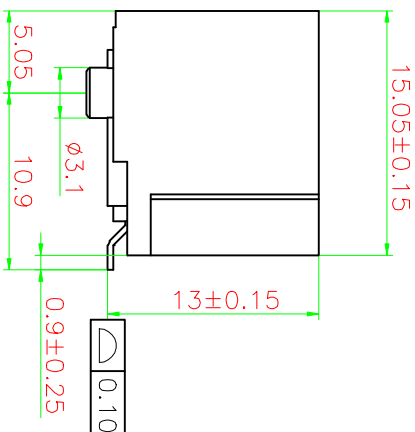
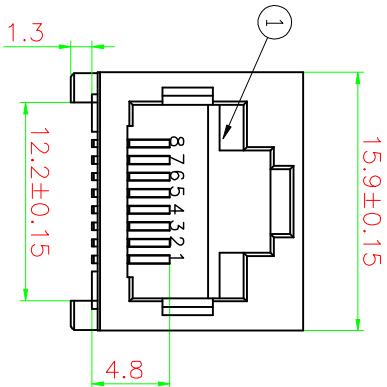
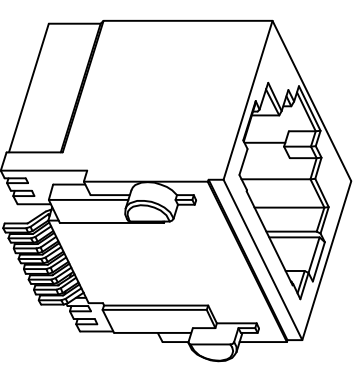


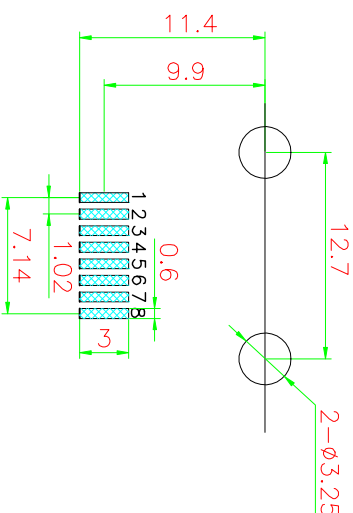

General Specification
Current Rating: 1.5A DC /Contact, 20mA DC for LED signals
Voltage Rating: 125V AC /Contact, 2.0 volts DC for LED signals
Operating Environment
Standard Temperature: -20℃~+70℃
Industrial Temperature: -40℃~+85℃
Humidity: 20~70%
Contact Resistance: $\leq 30m\Omega$
Insulation Resistance: $\geq 500M\Omega$
Dielectric Strength: 500V AC/(50HZ)/Min
Mating And unmating Force: 3~20N
Durability: 750 Cycles Min

Material Specification
Housing :Thermo-plastic, UL94V-0.
Contact :Alloy Copper
Shield :Alloy Copper

Please refer to the customer drawing when customer has specified

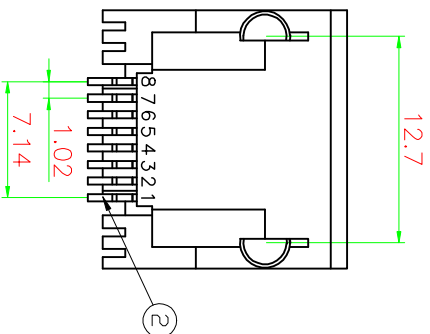

PCB LAYOUT
RECOMMENDED

网络插座外形图

绘图: 吴鹏飞 日期: 2022.03.28

审核: 陈伟 日期:

批准: 陈伟 日期:



温州瑞川电子有限公司
WEN ZHOU RUI CHUAN ELECTRONIC CO., LTD.

品名: RCH-56-31-7P (无灯全塑)

料号: 5631TP-80000011LB09 (WR44136)

型号: RJ45 图号:

角度: $\pm 2^\circ$ 版本: 1 of 1 单位:mm 比例: 1:1 纸张: A4

2	插针	PHOSPHOR BRONZE	8	1U"	
1	插座	LCP	1	BLACK	
序号	名称	材料	数量	镀层/颜色	备注

1	2	3	变更单号	绘制	日期	审核	批准	该图面供温州瑞川电子有限公司内部使用,不得私自复印
版本	变更履历							
A/0	新出版发行				20220328			
1								
2								
3								
4								
5								
6								
7								
8								
9								
10								
11								