

A

B

C

D

E





F

G


H

I

J

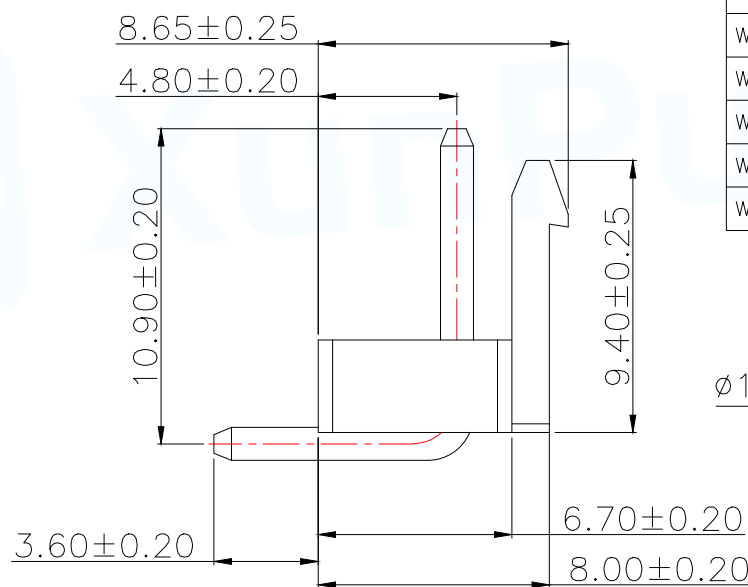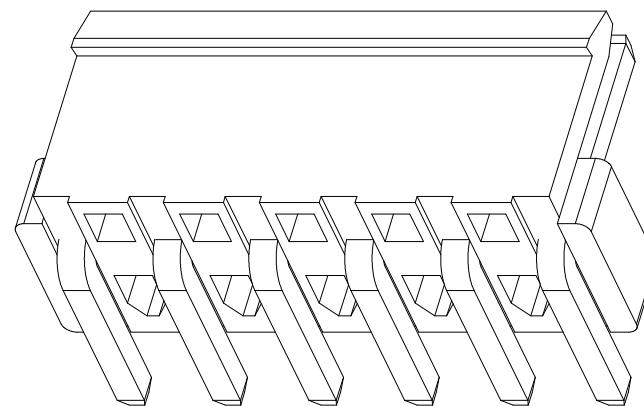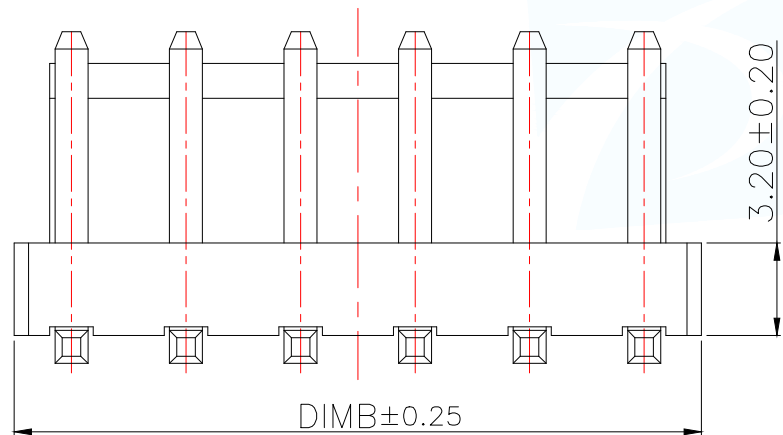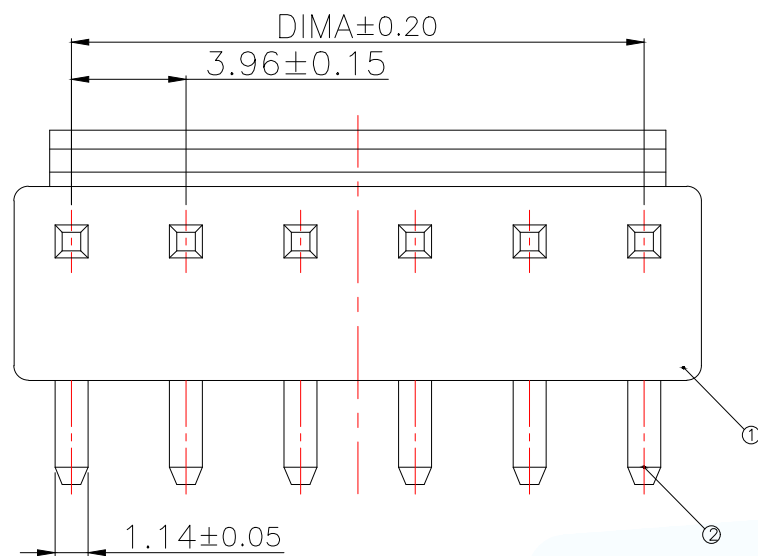

Part No	Pin	A	B
WAFER-VH3.96-2PWZ-Y62	2	3.96	7.92
WAFER-VH3.96-3PWZ-Y62	3	7.92	11.88
WAFER-VH3.96-4PWZ-Y62	4	11.88	15.84
WAFER-VH3.96-5PWZ-Y62	5	15.84	19.80
WAFER-VH3.96-6PWZ-Y62	6	19.80	23.76
WAFER-VH3.96-7PWZ-Y62	7	23.76	27.72
WAFER-VH3.96-8PWZ-Y62	8	27.72	31.68
WAFER-VH3.96-9PWZ-Y62	9	31.68	35.64
WAFER-VH3.96-10PWZ-Y62	10	35.64	39.60
WAFER-VH3.96-11PWZ-Y62	11	39.60	43.56
WAFER-VH3.96-12PWZ-Y62	12	43.56	47.52
WAFER-VH3.96-13PWZ-Y62	13	47.52	51.48
WAFER-VH3.96-14PWZ-Y62	14	51.48	55.44
WAFER-VH3.96-15PWZ-Y62	15	55.44	59.40
WAFER-VH3.96-16PWZ-Y62	16	59.40	63.36

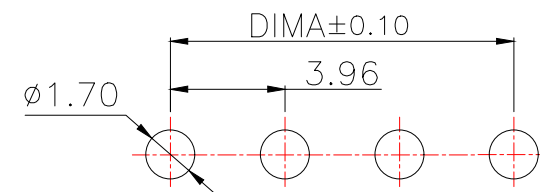

适用线路板(PCB LAYOUT)

序号	品名	材质
1	VH3.96 胶芯	PA66 UL94V-2 Beige
2	VH3.96 弯针 端子	Copper Alloy/ Tin Plating

Technical Index:

- 1.Temperature range: -25°C~85°C.
- 2.Rated voltage: 250V DC/AC(rms).
- 3.Rated current: 7.0A.
- 4.Contact resistance: ≤20mΩ.
- 5.Withstanding voltage: 1500V AC/minute.
- 6.Insulation resistance: ≥1000MΩ.

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES		TITLE: VH3.96 弯针	
DECIMALS:		PAR	WAFER-VH3.96-NPWZ-Y62
ANGLES:		DWN	
X.:±0.50		CHKD	
X':.:±5°		APVD	
.X:±0.20		SCALE:1:1	UNIT:MM
.XX:±0.10		SIZE:A4	SHEET:1F1
X.XX':.:±1°		CUSTOMER COPY	REV:A