
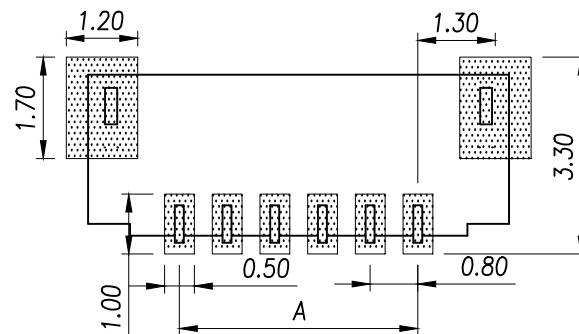
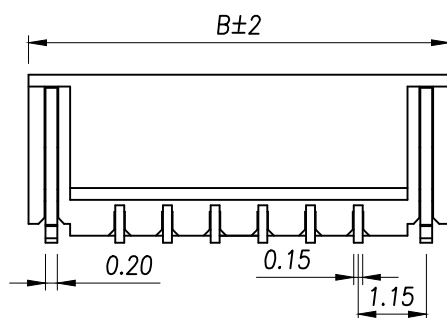

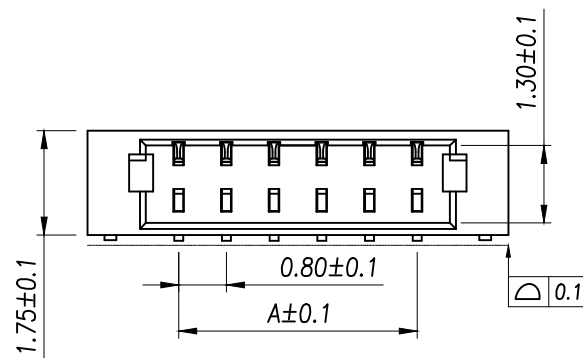


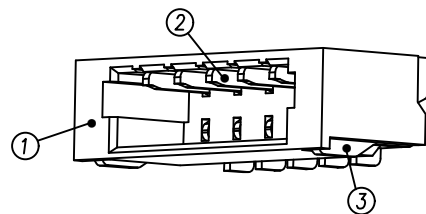

P.C.B LAYOUT

Part No	Pin	A	B	Part No	Pin	A	B
ZX-0.8-2PWT	2	0.80	3.85	ZX-0.8-14PWT	14	10.40	13.45
ZX-0.8-3PWT	3	1.60	4.65	ZX-0.8-15PWT	15	11.20	14.25
ZX-0.8-4PWT	4	2.40	5.45	ZX-0.8-16PWT	16	12.00	15.05
ZX-0.8-5PWT	5	3.20	6.25	ZX-0.8-17PWT	17	12.80	15.85
ZX-0.8-6PWT	6	4.00	7.05	ZX-0.8-18PWT	18	13.60	16.65
ZX-0.8-7PWT	7	4.80	7.85	ZX-0.8-19PWT	19	14.40	17.45
ZX-0.8-8PWT	8	5.60	8.65	ZX-0.8-20PWT	20	15.20	18.25
ZX-0.8-9PWT	9	6.40	9.45	ZX-0.8-21PWT	21	16.00	19.05
ZX-0.8-10PWT	10	7.20	10.25	ZX-0.8-22PWT	22	16.80	19.85
ZX-0.8-11PWT	11	8.00	11.05	ZX-0.8-23PWT	23	17.60	20.65
ZX-0.8-12PWT	12	8.80	11.85	ZX-0.8-24PWT	24	18.40	21.45
ZX-0.8-13PWT	13	9.60	12.65				

NOTES:

- 1.BASE: LCP
- 2.PIN: Brass
- 3.Solder Tab: Brass

SPECIFICATIONS:

- 1.Spacing: 0.8
- 2.Voltage Rating: 30V AC DC
- 3.Current Rating: 0.5A AC DC
- 4.Insulation Resistance: 100MΩ Min
- 5.Contact Resistance: 20mΩ Max
- 6.Withstanding voltage: 200V AC 1/Minute
- 7.Temperatuer Range: -25℃ ~+ 85℃

GENERAL TOLERANCE		制圖 DRAWING	Yu			料号 PART NO.	ZX-0.8-nPWT	版本 REV.	A
X.±0.25	X.*±2°	审核 CHECK	HUANG			品名 TITLE	WAFER 0.8 贴片	页次 SHEET	1/1
.X±0.20	.X*±1°	核准 APPROVAL	RUAN			客户料号 CUTM.NO.			
.XX±0.15	.XX*±0.5°								
.XXX±0.10	.XXX*±0.5°								
		单位 UNITS	MM	比例 SCALE	1:1	兆星精密电子（深圳）有限公司 ShenZhen ZhaoXing Precision electronics Co., Ltd.			