
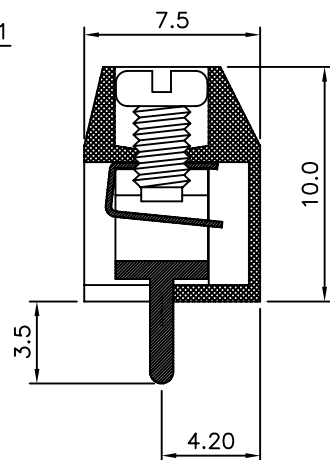


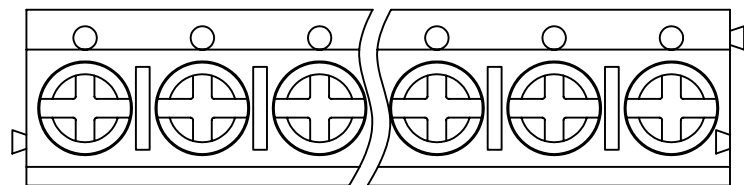

Voltage Rating: 300VAC
 Current Rating: 8 Amps/Way Max
 Insulation Resistance: 5000 Megohms/1000V
 Withstanding Voltage: 1500VAC(1min) Test Time=60sec/1pcs
 Wire Range: 14–26AWG
 Torque: 4kgf.cm/M2.5
 Operating Temperature: –30°C To +105°C
 Soldering Reliability:
 Test Temperature=250°C±10°C/5 Seconds Max
 Contact(Metal Housing): Brass Stamping
 Terminal Screw: Steel Galvanized And Chromated
 Wire Guard: Copper Alloy
 Surface Of Solder Tail: Tin Plated
 Insulator Body(Housing): Polyamide(Glass Filled)(UL94V–0)

F	10/18/2006
---	------------