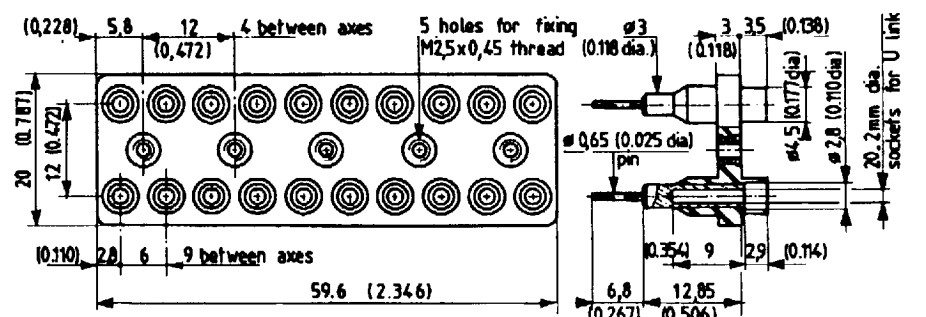


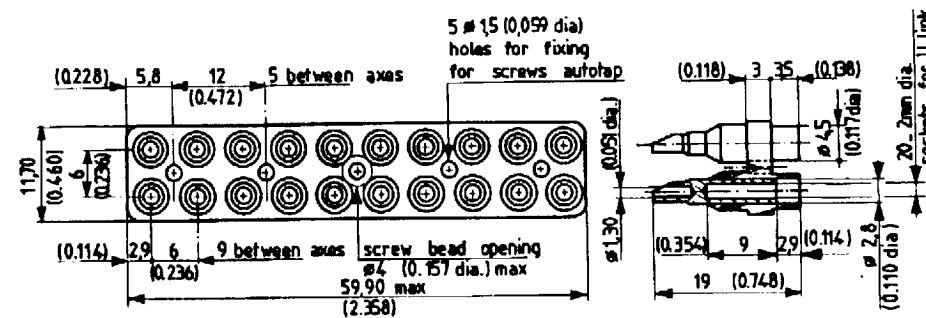
2 mm dia. SERIES

ACCESSORIES

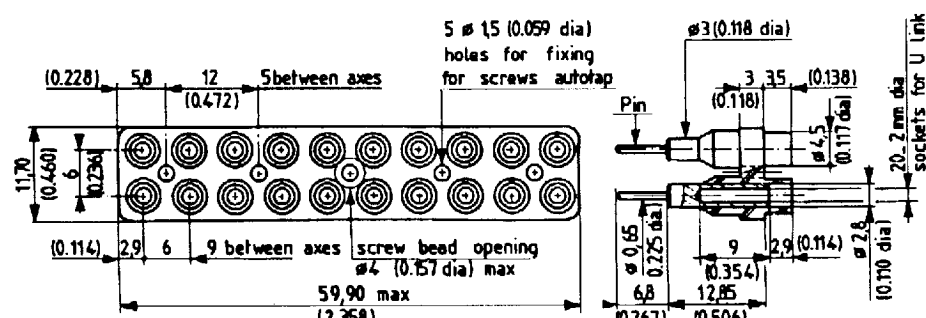
PIN OUTLET

Part number	Dimensions (12 mm between axes)
R 929 992 000* / Blue R 929 992 001* / Red R 929 992 002* / Green R 929 992 003* / Black R 929 992 004* / Yellow	 Drilling jig : R 282 906 * Panel piercing dimension: (thickness: 2 mm maximum) 20 holes 5 dia. (contacts) – 5 holes 3 dia. (fixing)

SOLDER OUTLET

Part number	Dimensions (6 mm between axes)
R 929 993 000* / Blue R 929 993 001* / Red R 929 993 002* / Green R 929 993 003* / Black R 929 993 004* / Yellow	 Drilling jig : R 282 690 * Panel piercing dimension: (thickness: 2 mm maximum) 20 holes 5 dia. (contacts) – 5 holes 3 dia. (fixing)

PIN OUTLET

Part number	Dimensions (6 mm between axes)
R 929 994 000* / Blue R 929 994 001* / Red R 929 994 002* / Green R 929 994 003* / Black R 929 994 004* / Yellow	 Drilling jig : R 282 690 * Panel piercing dimension: (thickness: 2 mm maximum) 20 holes 5 dia. (contacts) – 5 holes 3 dia. (fixing)

NOTA : The size of the contact blocks makes it possible to assemble them side by side while maintaining a distance of 6 mm between axes in all directions.