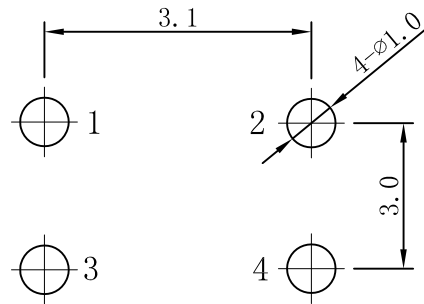
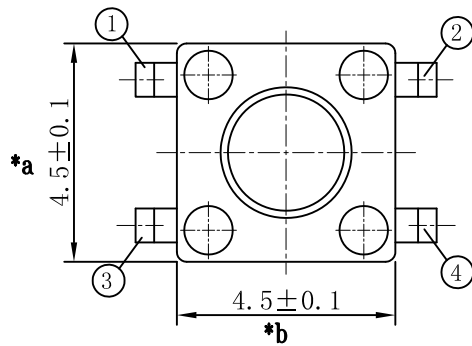
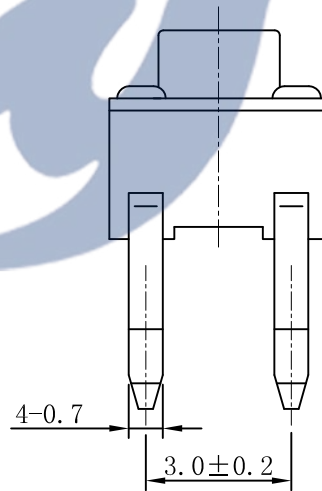
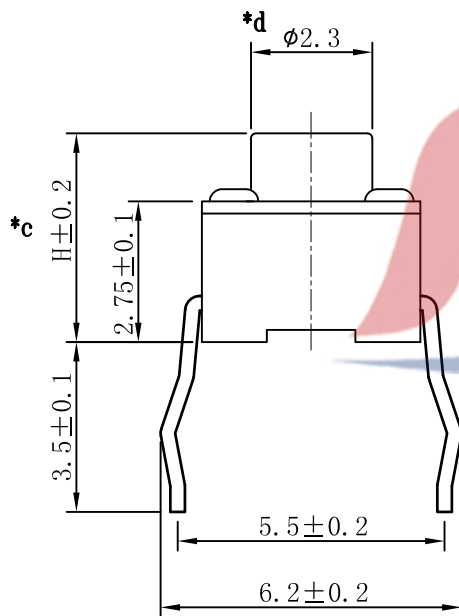



P.C.B LAND
DIMENSION

REFERENCE DRAWING

H	
3.5	3.8
4.3	4.5
✓ 5.0	5.5
6.0	6.5
.....	
10.0	10.5

CIRCUIT
DIAGRAM

主要技术规格:

1. 额定值: 50mA DC12V
2. 接触电阻: $\leq 50m\Omega$
3. 操作力 E: $250 \pm 40gf$
4. 行程: $0.20 \pm 0.1mm$
5. 绝缘电阻: $\geq 100M\Omega$
6. 抗电强度: 250V 50HZ 1Min.
7. 寿命: 100,000 Cycles

电话: 0769-82320511-867

					TOLERANCE UNLESS SPECIFIED		A2	2022.9.27	更新图纸		WM		
							A1	2022.2.17	 胶壳和按钮材质改为PA	Z L K	G Y W		
					UP TO 5mm:±0.1	ANGULAR ±1°	A0	2018.6.25	首次发行				
5	STEM	PA6T	1		ABOVE 5mm:±0.2		NO	DATE	REVISIONS		BY	APPD	
4	COVER	SPCC	1	Cu/Sn-Plating	TITLE:TACT SWITCH				UNIT : MM	ROHS COMPLIANT	DWN		
3	CONTACT	SUS	1	Ag-Plating	MODEL: TC-00204-050E				SCALE: 1:1		CHK'D		
2	TERMINAL	BRASS	4	Ag-Plating	 DONGGUANG HAUYU ELECTRONICS CO., LTD 东莞市弘皓电子有限公司				APPD				
1	BASE	PA6T	1						PRO.AGL:  		REV :A2		
NO.	PART	NAME	MATERIAL	QTY	FINISHING								

DONGGUANG HAOYU ELECTRONICS CO., LTD
东莞市弘皓电子有限公司

PRO.AGL: REV :A2