
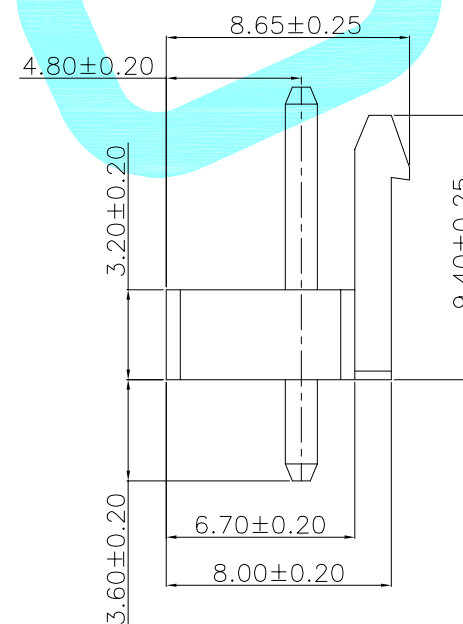
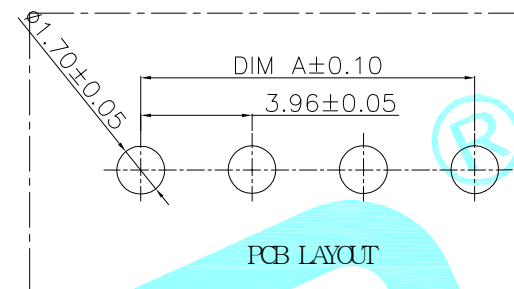
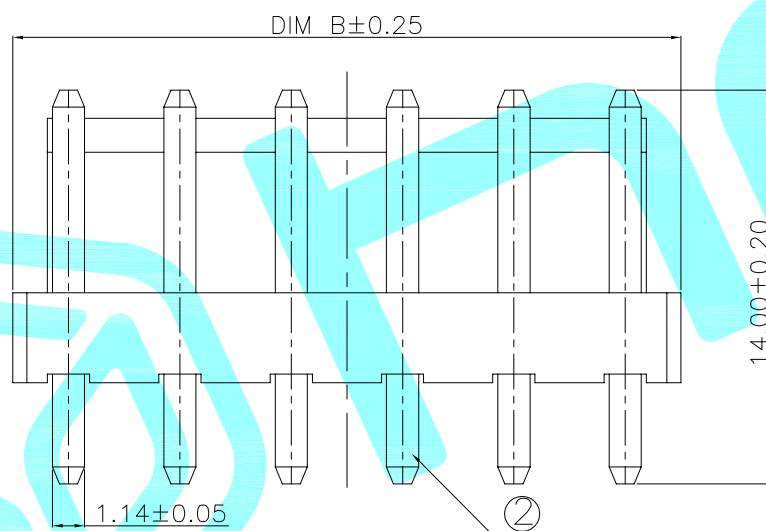


DIM Poles	DIM A	DIM B
2	3.96	7.92
3	7.92	11.88
4	11.88	15.84
5	15.84	19.80
6	19.80	23.76
7	23.76	27.72
8	27.72	31.68
9	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.40

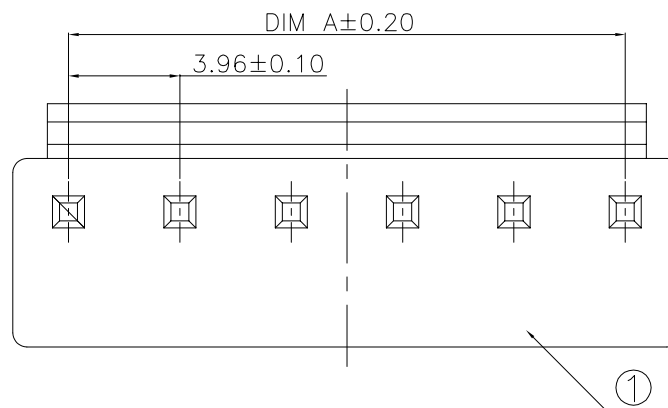

- 1.Pin pitch: 3.96
- 2.Rated voltage: 250V AC,DC
- 3.Rated current: 7.0A AC,DC
- 4.Contact resistance: $\leq 20\text{m}\Omega$
- 5.Withstanding voltage: 1500V AC/minute
- 6.Insulation resistance: $\geq 1000\text{M}\Omega$
- 7.Operating temperature: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

②	PIN	—	—	Brass	Sn Plated	—
①	Base	—	1	PA66 UL94V0	White	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS			DATE			
DRAWN		LIUCAN	2021.4.28			
CHECKED				TITLE:	Bar Connector Series	
APPROVALS				PART NO.	3.96D-VH-nA	
TOLERANCES ARE		30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
		10~30	±0.20			
		5~10	±0.15			
		~ 5	±0.10			
		±2'		DRAWING NO.	—	PROJ: 
						SHEET 1 OF 1

—	A	—	NEW	—	—	—
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.