

版次 (Ed)	变更摘要 (Change The Content)	日期 (Date)
0	新产品发行 (New Product Launch)	2017/09/06
1	料号变更	2024/09/25

序号 (NO.)	品名 (Name)	材质 (Material)
①	2.00 F型立式2代WTB胶芯 2.00 Pitch S/T Wire To Board Housing(H=8.3)	LCP UL94V-0 本色 Natural
②	2.00 F型卧式2代WTB端子 2.00 Pitch R/A Wire To Board Terminal(H=5.2)	铜合金/表面镀锡 Copper Alloy/ Tin Plating
③	2.00 F型立式2代WTB焊片 2.00 Pitch S/T Wire To Board Fitting Nail(H=8.3)	铜合金/表面镀锡 Copper Alloy/ Tin Plating
④	2.00 F型立式2代WTB吸盖 2.00 Pitch S/T Wire To Board Cover(H=8.3)	LCP UL94V-0 本色 Natural

技术指标:

- 工作温度: $-25^{\circ}\text{C}\sim 85^{\circ}\text{C}$.
- 额定电压: 200V DC/AC(rms).
- 额定电流: 2.0A AC, DC.
- 接触电阻: $\leq 20\text{m}\Omega$.
- 耐压值: 500V AC/minute.
- 绝缘电阻: $\geq 1000\text{M}\Omega$.
- 产品料号:

WT200F2L-***-***
NO OF CKT (产品PIN数) 流水码


Plating (电镀方式)

- 端子全金
(Terminal G/F OVER ALL)
- 端子全亮锡
(Terminal all bright tin)


Packing (包装方式)

- T: TUBE管装
R: TAPE & REEL卷装
C: TAPE & REEL WITH COVER
(加吸盖卷装)

CKT	DIM A	DIM B	DIM C	DIM D
2	2.00	4.90	8.00	2.50
3	4.00	6.90	10.00	2.50
4	6.00	8.90	12.00	3.50
5	8.00	10.90	14.00	5.50
6	10.00	12.90	16.00	7.50
7	12.00	14.90	18.00	9.50
8	14.00	16.90	20.00	11.50
9	16.00	18.90	22.00	13.50
10	18.00	20.90	24.00	15.50
11	20.00	22.90	26.00	17.50
12	22.00	24.90	28.00	19.50
13	24.00	26.90	30.00	21.50
14	26.00	28.90	32.00	23.50
15	28.00	30.90	34.00	25.50
16	30.00	32.90	36.00	27.50
17	32.00	34.90	38.00	29.50
18	34.00	36.90	40.00	31.50
19	36.00	38.90	42.00	33.50
20	38.00	40.90	44.00	35.50

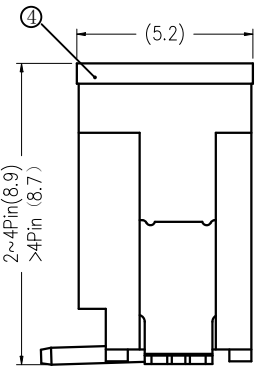

适用线路板 (PCB LAYOUT)

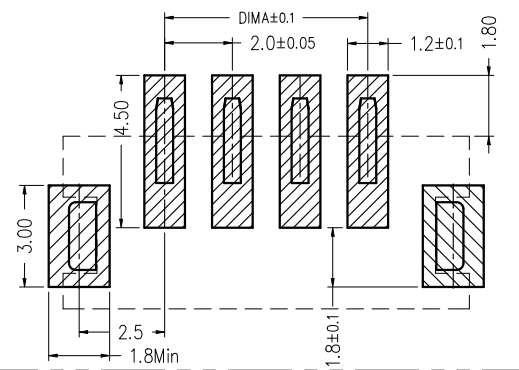

一般公差 (TOLERANCE)
X. ± 0.50 .XX ± 1.0
X. ± 20 .XXX ± 0.5
ANGLES $\pm 1^{\circ}$

ZGWD 浙江温达电子有限公司
ZHEJIANG WENDA ELECTRONICS CO., LTD

品名 (TITLE)	2.00 Pitch F型立式2代WTB 2.00 PITCH H8.3 S/T WIRE TO BOARD SMT CONN	制图 (DR)	Anlan
料号 (DWG.NO)	WT200F2L-***-***	校对 (CHKD)	田峰
比例 (SCALE)	单位 (UNITS) mm	审核 (APPD)	黄志明
张数 (SHEET) 1 OF 1	SIZE A4	REV A	

