

Operation: SMT/卧式 阻燃 DC 电源连接器 (Type-A)



ITEM NO.: DC-050-T20 (Series)

(L14.8×W8.9×H10.9 DC-CONNECTORS)

表面插装 DIP

侧向操作 LATERAL

精密部品 NICETY

可靠 STABILIZE




適合環保 RoHS

Technical parameter



PROJECT		LEVEL	A[better product]	B[average product]
Electrical Properties	Contact Rating		3A, 12V DC	
	Initial Contact Resistance		50mΩ max.	
	Insulation Resistance		100MΩ min.500V DC Skey/PD: 100MΩ min.300V DC	
Durable Performance	Withstand Voltage		500V AC for 1 minute	350 V AC for 1 minut
	There No Load		6,000 Cycles	5,000 Cycles
	Rated Load		5,000 Cycles	4,000 Cycles
	Storage Temp		25℃-50℃%RH(Operating temperature: -35~75)	
	Operating Force		IF:35N MAX. (EF:10.0N MIN.)	
	Heat Rrsistance		IR Reflow:255℃, 5sec. Manual:350℃, 3sec.	

Unit:mm

CIRCUIT DIAGRAM

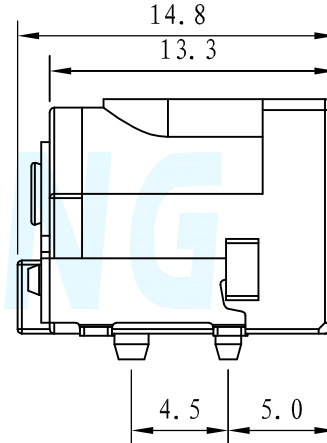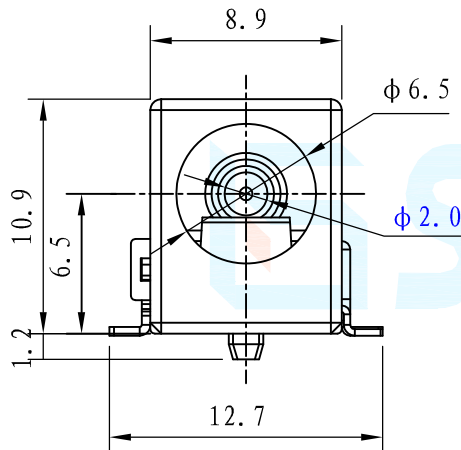

P.C.B LAYOUT

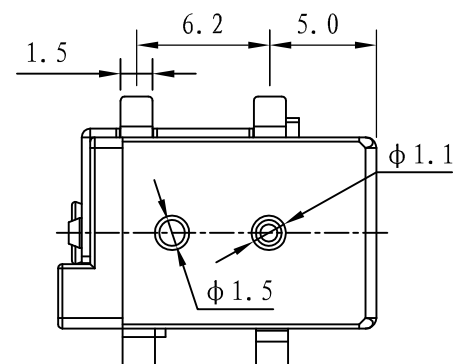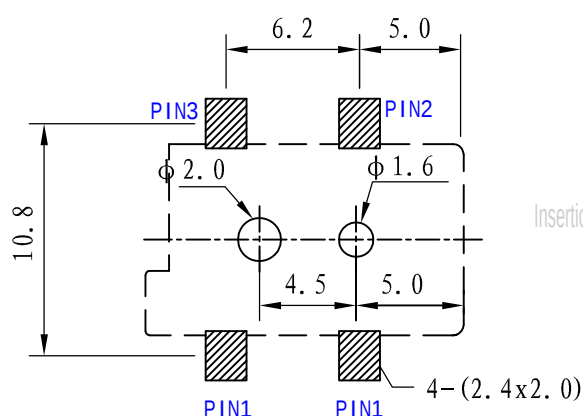

PIN Diam

1.65mm

● 2.00mm