

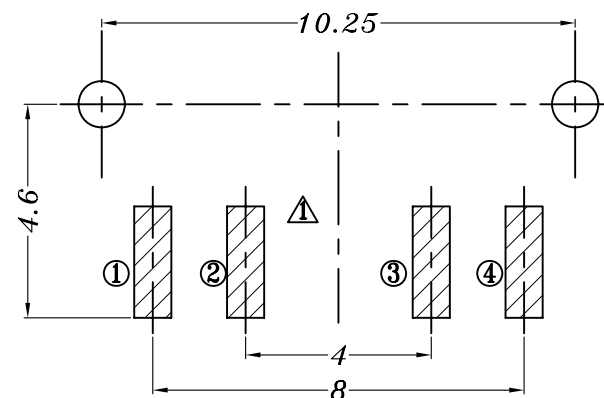


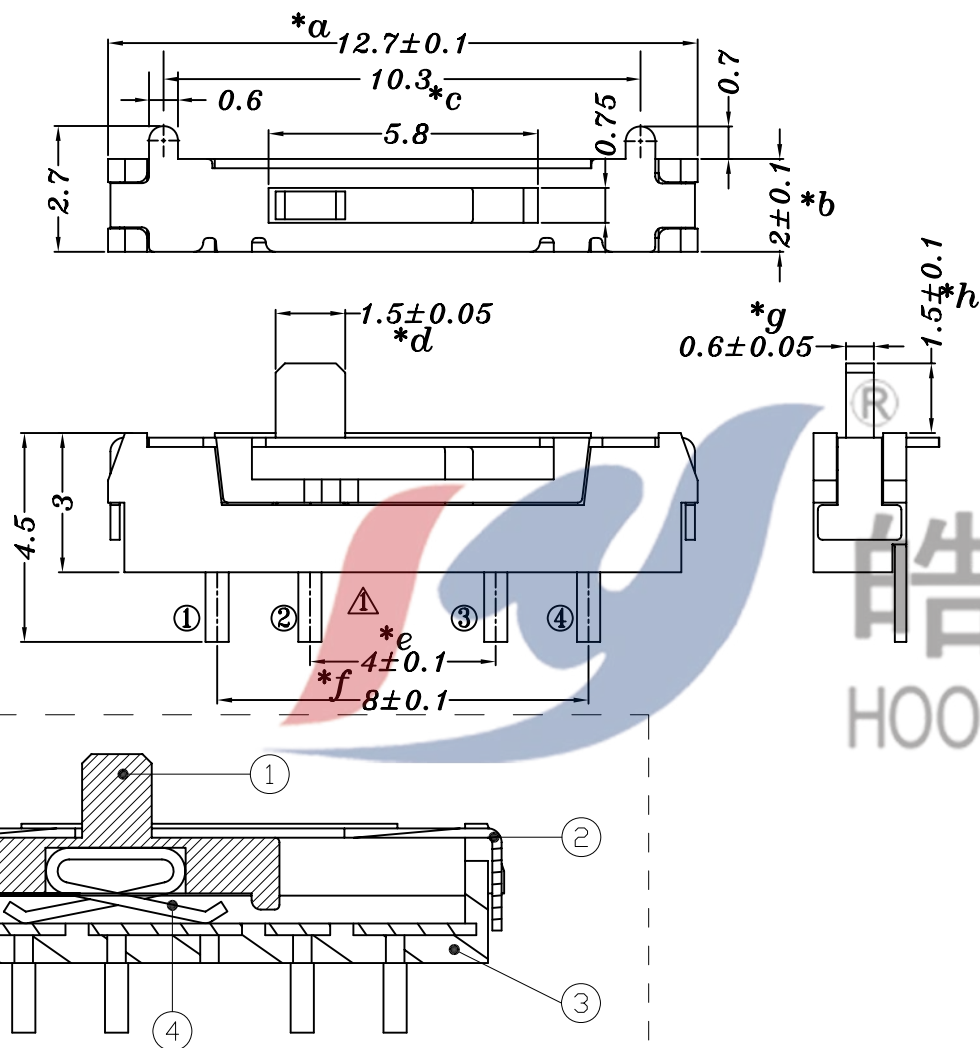

P.C.B LAYOUT

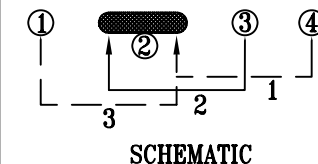

SCHEMATIC

电话：0769-82320511-867

SPECIFICATION

1. Rating: DC 12V 0.3A
2. Travel: 2 mm
3. Function: 1P3T
4. Contact Resistance: $\leq 70\text{m}\Omega\text{MAX}$
5. Operating Force: A+B+C (200gf $\pm$ 80gf)
A+B+C (250gf $\pm$ 100gf)
6. Life test: 10,000 cycles

				TOLERANCE UNLESS SPECIFIED		A1	2023.02.13	新增脚位标识		GYW	
				UP TO 5mm: ± 0.1	ANGULAR	A0	2022.02.23	首次发行		GYW	
				ABOVE 5mm: ± 0.2	$\pm 1^\circ$	NO	DATE	REVISIONS		BY	APPD
4	MK22D10A SPRING	PBS	1	WASHING	TITLE: MINI SLIDE SWITCH		UNIT : MM	ROHS	DWN		
3	MK13D70-E CASE	PA10T/0.25mm BRASS STRIP	1	BLACK/Ag PLATED	MODEL: MK-13D70G2-E-B		SCALE: 6:1	COMPLIANT	CHK'D		
2	MK13D70 COVER	0.2mm SUS	1	Ni PLATED	DONGGUANG HAOYU ELECTRONICS CO., LTD 东莞市弘皓电子有限公司				APPD		
1	MK13D70 KNOB 弹线	PA10T	1	WHITE/BLACK					PRO.AGL:		
NO.	PART NAME	MATERIAL	QTY	FINISHING							REV :A1