




REV.	ECN NO OR DESCRIPTION	REVISED	DATE

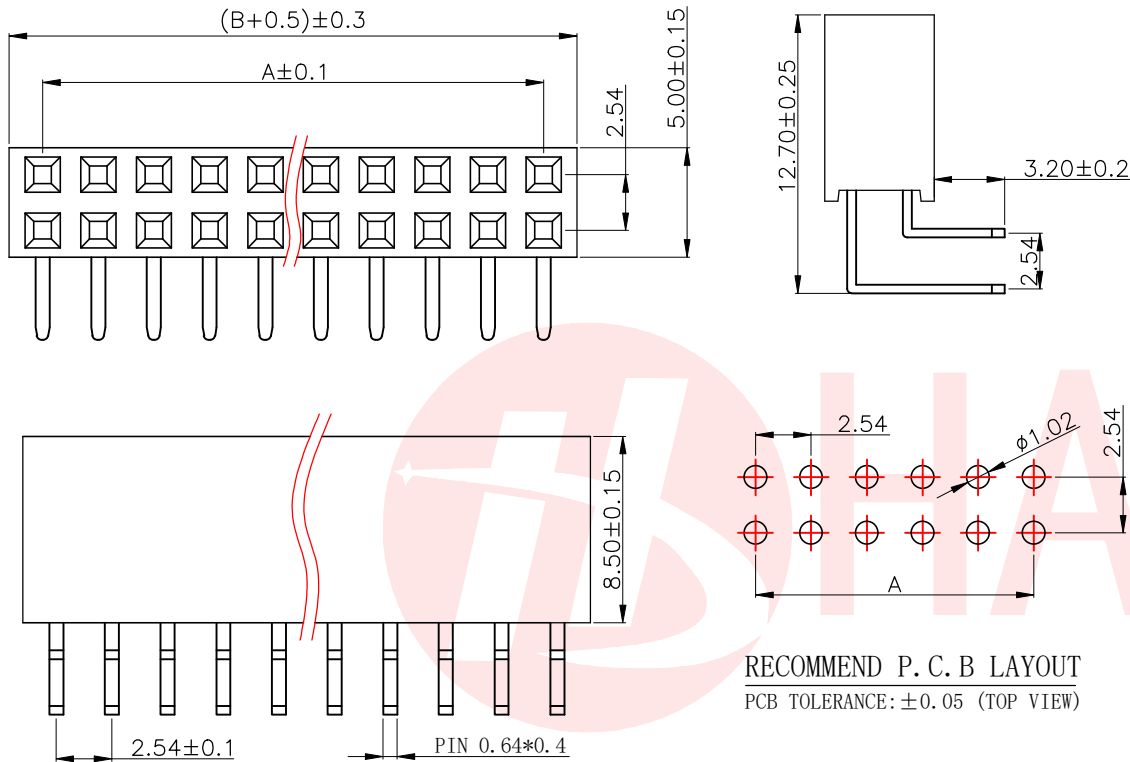

RECOMMEND P. C. B LAYOUT
PCB TOLERANCE: ±0.05 (TOP VIEW)

CSG PART NO.	No. of	DIM. A	DIM. B	CSG PART NO.	No. of	DIM. A	DIM. B
HB-FH5-25421PB2GOB	2*1P	0.00	2.54	HB-FH5-254221PB2GOB	2*21P	50.80	53.34
HB-FH5-25422PB2GOB	2*2P	2.54	5.08	HB-FH5-254222PB2GOB	2*22P	53.34	55.88
HB-FH5-25423PB2GOB	2*3P	5.08	7.62	HB-FH5-254223PB2GOB	2*23P	55.88	58.42
HB-FH5-25424PB2GOB	2*4P	7.62	10.16	HB-FH5-254224PB2GOB	2*24P	58.42	60.96
HB-FH5-25425PB2GOB	2*5P	10.16	12.70	HB-FH5-254225PB2GOB	2*25P	60.96	63.50
HB-FH5-25426PB2GOB	2*6P	12.70	15.24	HB-FH5-254226PB2GOB	2*26P	63.50	66.04
HB-FH5-25427PB2GOB	2*7P	15.24	17.78	HB-FH5-254227PB2GOB	2*27P	66.04	68.58
HB-FH5-25428PB2GOB	2*8P	17.78	20.32	HB-FH5-254228PB2GOB	2*28P	68.58	71.12
HB-FH5-25429PB2GOB	2*9P	20.32	22.86	HB-FH5-254229PB2GOB	2*29P	71.12	73.66
HB-FH5-254210PB2GOB	2*10P	22.86	25.40	HB-FH5-254230PB2GOB	2*30P	73.66	76.20
HB-FH5-254211PB2GOB	2*11P	25.40	27.94	HB-FH5-254231PB2GOB	2*31P	76.20	78.74
HB-FH5-254212PB2GOB	2*12P	27.94	30.48	HB-FH5-254232PB2GOB	2*32P	78.74	81.28
HB-FH5-254213PB2GOB	2*13P	30.48	33.02	HB-FH5-254233PB2GOB	2*33P	81.28	83.82
HB-FH5-254214PB2GOB	2*14P	33.02	35.56	HB-FH5-254234PB2GOB	2*34P	83.82	86.36
HB-FH5-254215PB2GOB	2*15P	35.56	38.10	HB-FH5-254235PB2GOB	2*35P	86.36	88.90
HB-FH5-254216PB2GOB	2*16P	38.10	40.64	HB-FH5-254236PB2GOB	2*36P	88.90	91.44
HB-FH5-254217PB2GOB	2*17P	40.64	43.18	HB-FH5-254237PB2GOB	2*37P	91.44	93.98
HB-FH5-254218PB2GOB	2*18P	43.18	45.72	HB-FH5-254238PB2GOB	2*38P	93.98	96.52
HB-FH5-254219PB2GOB	2*19P	45.72	48.26	HB-FH5-254239PB2GOB	2*39P	96.52	99.06
HB-FH5-254220PB2GOB	2*20P	48.26	50.80	HB-FH5-254240PB2GOB	2*40P	99.06	101.60

SPECIFICATIONS

Current Rating:1.5Amps
Withstanding Voltage: AC 500V
Insulation Resistance:1000MΩ Min
Contact Resistance:20mΩ Max
Operation Temperature: -40°to+105°
Insrlator Material:Polyester(UL94V-0)
Contact Material:Phosphor bronze
Contact Material:Brass
Standard:PA6T
Contact Plating:Gold Flash
Max.Processing Temp: 240°C for30-60seconds
(260°C for5seconds)

HB-FH 5 - 254 XXX X X XX X - XXX
1 2 3 4 5 6 7 8 9

- 1:Series No:
FH-Pin Header

2:Welding Board Type:
5-双排90度/SMT
TYPE

3:Pitch:
100-1.00mm
127-1.27mm
200-2.00mm
254-2.54mm

4:PIN位/PIN bit:
2*1P=21P
- 5:颜色/Color:
B-Black

6:材料/Material:
1-PBT 2-PA6T

7:触点电镀/Contact Plating:
G0-Gold Flash

8:包装方式/Package Type:
P-袋装/PE B-盒装/BOX
T-管装/Tubing W-卷装/winding

9:其他备注/Other remarks

UNLESS OTHERWISE SPECIFIED TOLERANCES		东莞市汉博电子科技有限公司 DONGGUAN HANBO TECHNOLOGY CO., LTD			
DECIMALS:	ANGLES:	TITLE	2.54FH H8.50 2xPIN 双排90度 Y型 PC3.2 PB12.7 PA6T		
X :±0.30	X :±2°	DWN	xiong	PART NO.	HB-FH5-254XXXXB2GOB
X.X :±0.25	X.X :±1°	CHKD	lee	SCALE:1:1	UNIT: mm
X.XX :±0.20		APVD	wang	SIZE: A4	SHEET:1OF 1
CUSTOMER COPY					