
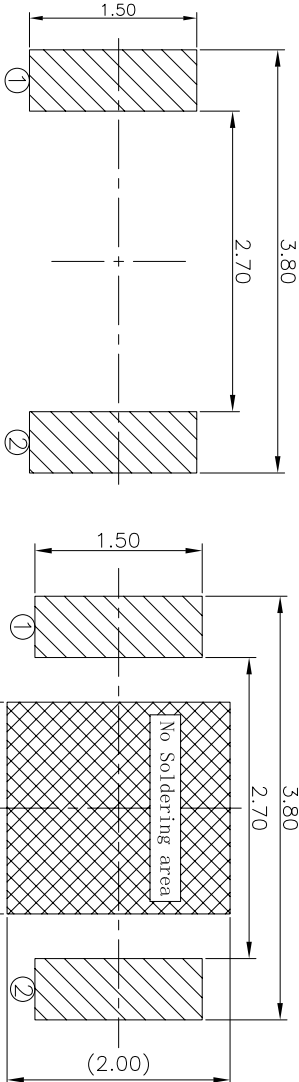

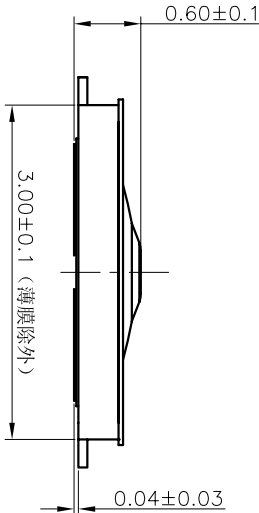


REV	ECN NO.	APPD
B	HJ-19-0189	ZO

规格 Specifications

额定负荷 Rating	DC 12V/50mA	
接触电阻 Contact Resistance	500mΩ max.	
绝缘电阻 Insulation resistance	DC:100V 60S 100MΩ min.	
抗电强度 Dielectric strength	AC250V(50-60HZ) 60S min.	
操作力 Operation force	炉前180±50gf	炉后200±50gf
寿命试验 Operating Life	50,000 cycles	
行程 Travels	0.13±0.08mm	

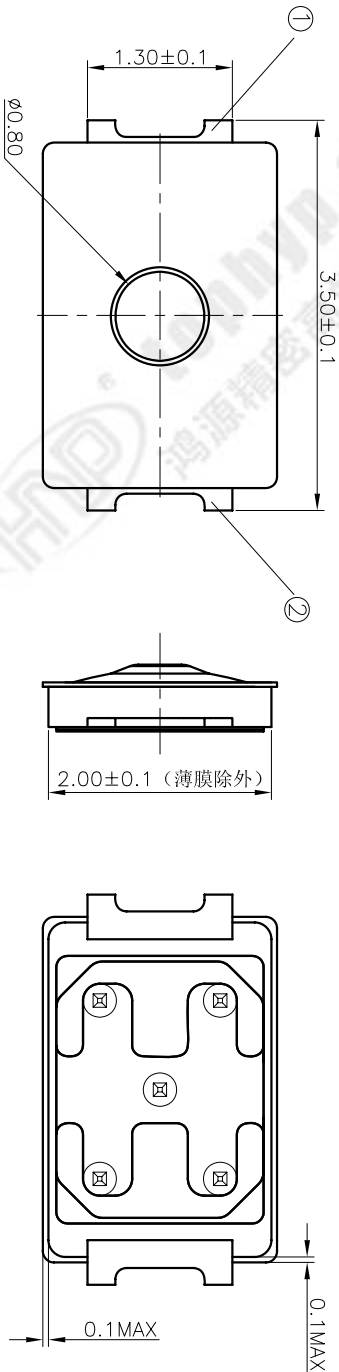

RECOMMENDED P.C.B. LAYOUT
安装尺寸图

LAND PATTERN PLAN
印刷电路板焊盘参考图

PRODUCT NO. : 1TS015A***-*****A30 - **

- 轻触开关
- 3X2系列
- 外形:
- A=两脚
- B=两脚无按柄
- 触点颜色:
- 底座颜色:
- 贴膜颜色:
- 操作力度:
- 初始颜色
- 则不启用
- 手感:
- 0=常规(弹片)
- 1=大手感(弹片)
- 2=小手感(弹片)
- 3=特殊手感(弹片)
- 材质:
- 0=初始材质
- 1=新增材质
- 3=3个弹片依次增加
- 其它:
- CT=编带(非编带,不启用)
- 产品高度(H):
- 060=0.60mm
- 065=0.65mm
- 070=0.70mm

5	KNOB	1	POLYAMIDE	BLACK	
4	FILM	1	POLYAMIDE	WHITE	
3	DOME	2	SUS301	Ag-PLATED	
2	HOUSING	1	POLYAMIDE	BLACK	
1	TERMINAL	1	PHOSPHOR BRONZE	Ag-PLATED	
ITEM		PART NAME	QUANTITY	MATERIAL	FINISH
HON YUAN					
HON YUAN PRECISION IND. CO.,LTD. SHENZHEN, CHINA, R.O.C.					
TITLE: PRODUCT DRAWING					
PART NO.(INTENDED USE) 1TS015A-1800-0600A30					
NAME(INTENDED USE) 3X2 SERIES TACT SWITCHES					
X. ± 0.2		X.* ± 0.2*	UNITS MM		
.X ± 0.1		.X* ± 0.1*	MAT'L		
.XX ± 0.01		.XX* ± 0.01*			
.XXX ± 0.002		.XXX* ± 0.005*	FINISH		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HON YUAN PRECISION IND. CO., LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF HON YUAN PRECISION IND. CO., LTD.					
Q'TY		DR: Y.Y.Chen 7/22/2019			
APPD: ZO 7/22/2019		CHKD: M.H.LI 7/22/2019		DWG NO.: 1TS015A-1800-0600A30-CT	
SCALE 25/1		SHEET 1/1		REV. B	