


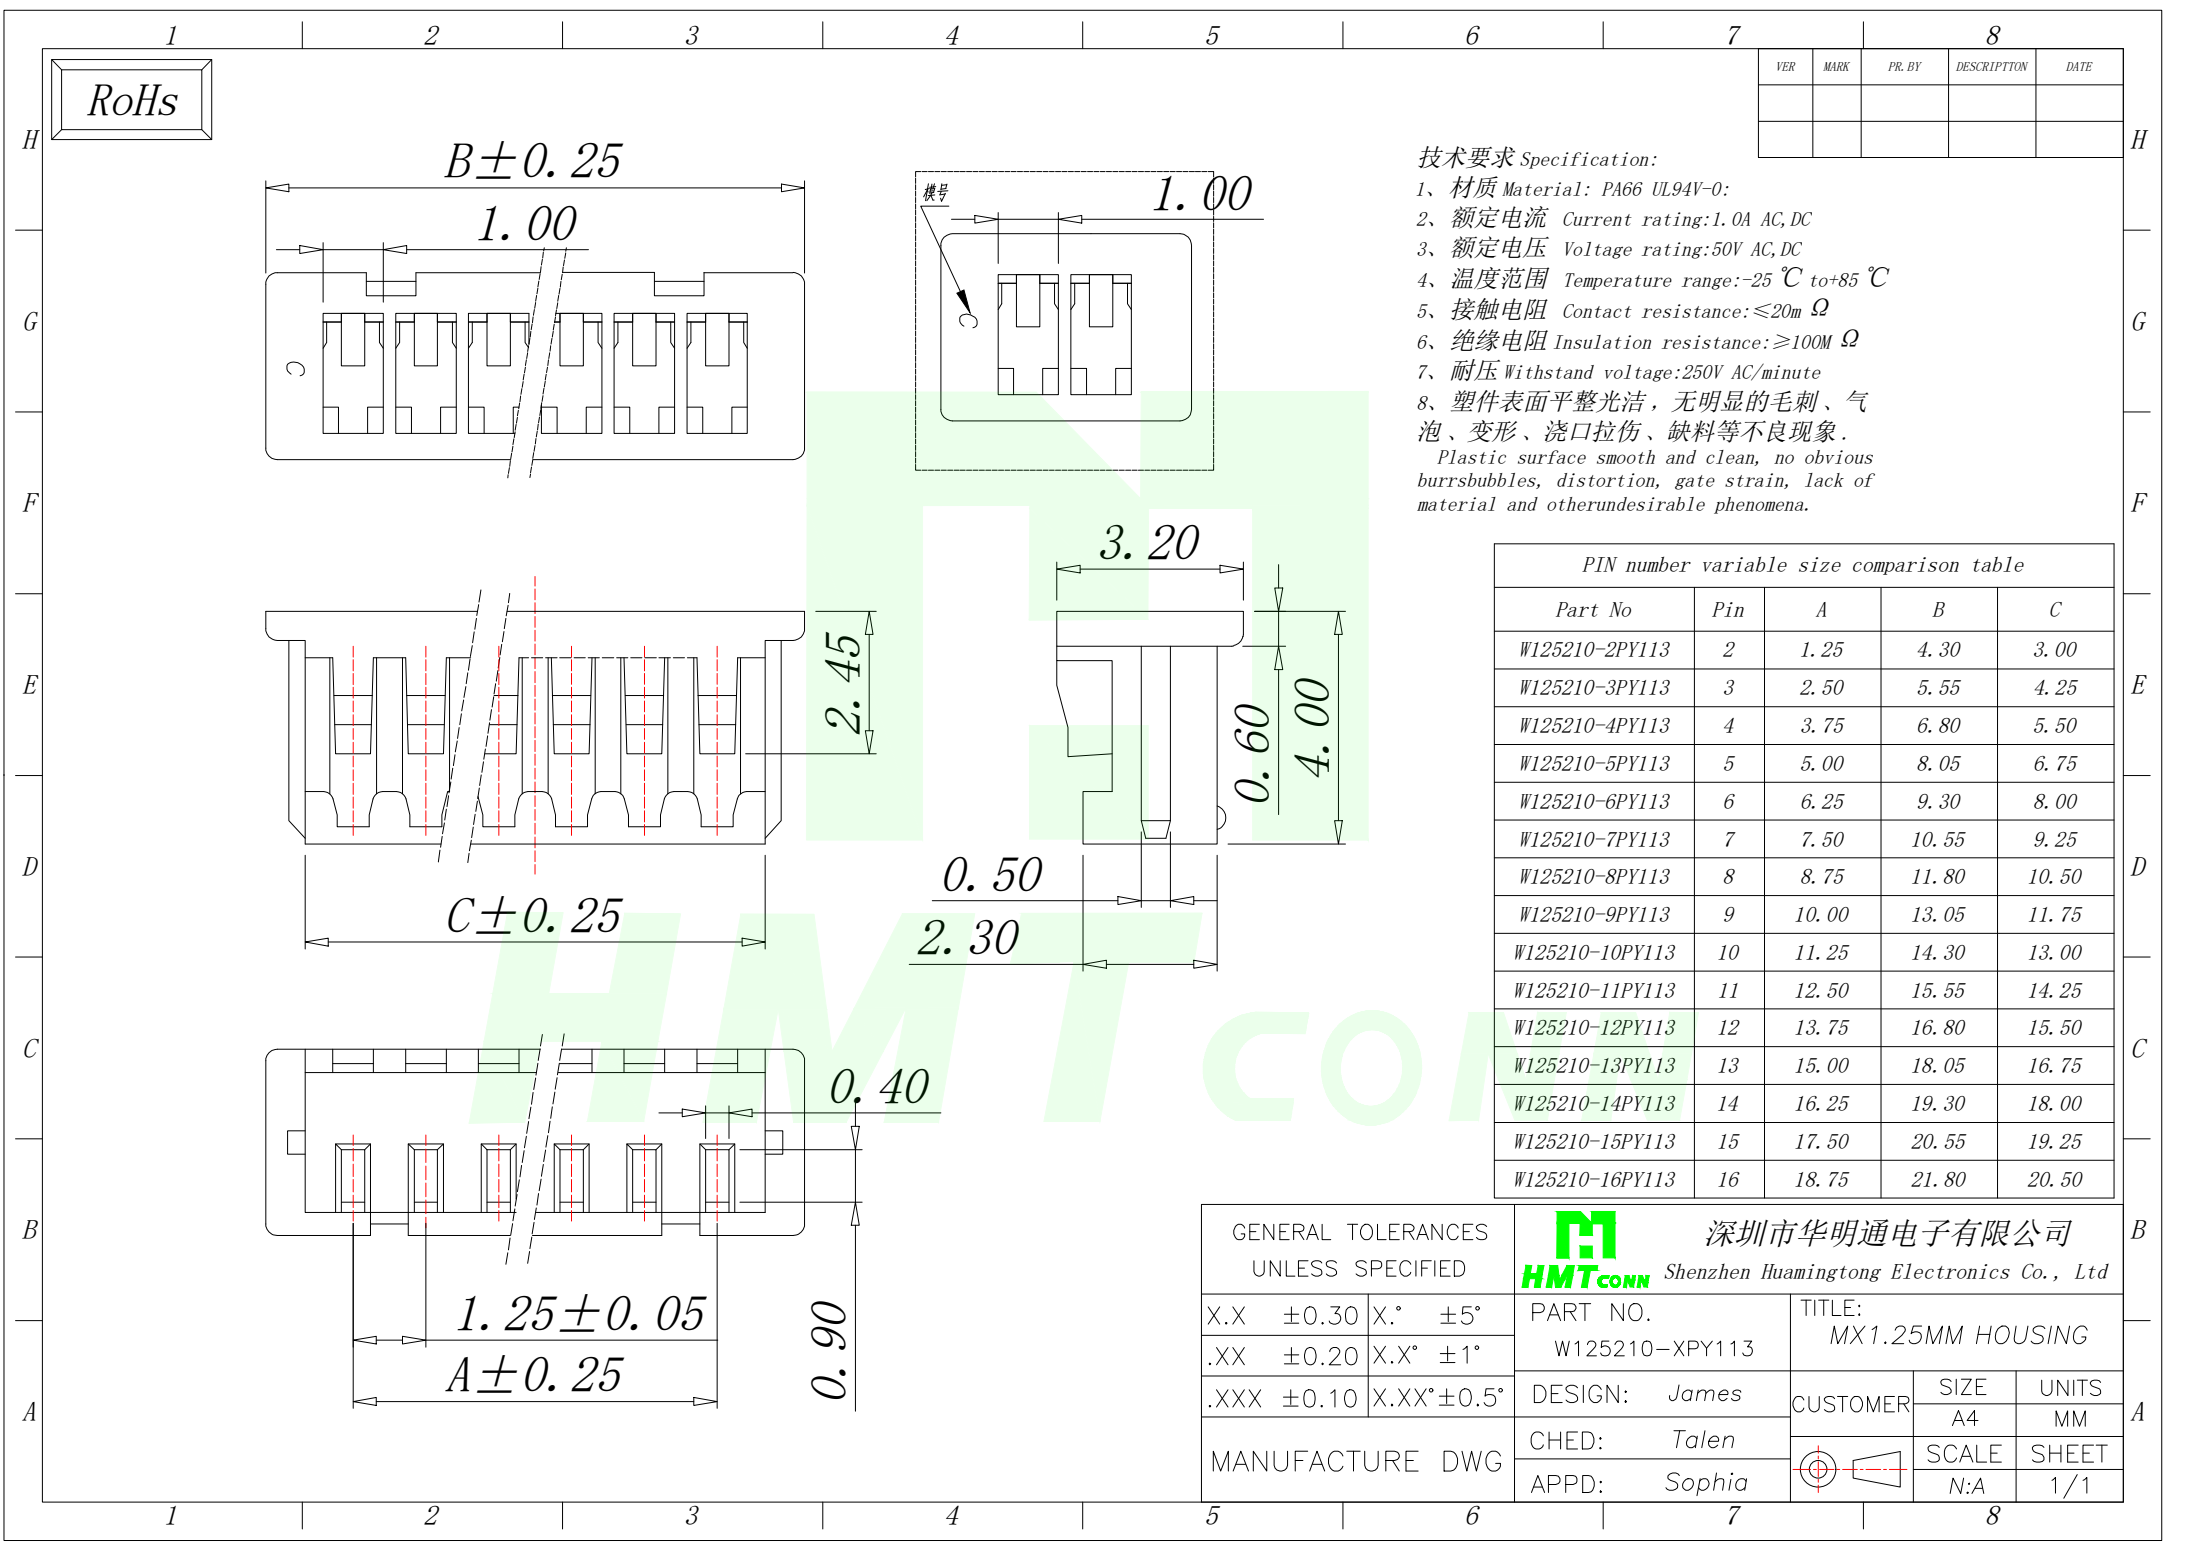

RoHs

$B \pm 0.25$

1.00

模号

1.00

3.20

2.45

0.60

4.00

0.50

2.30

$C \pm 0.25$

0.40

1.25 ± 0.05

$A \pm 0.25$

0.90

技术要求 Specification:

- 1、材质 Material: PA66 UL94V-0:
- 2、额定电流 Current rating:1.0A AC,DC
- 3、额定电压 Voltage rating:50V AC,DC
- 4、温度范围 Temperature range:-25℃ to+85℃
- 5、接触电阻 Contact resistance: $\leq 20m\Omega$
- 6、绝缘电阻 Insulation resistance: $\geq 100M\Omega$
- 7、耐压 Withstand voltage:250V AC/minute
- 8、塑件表面平整光洁, 无明显的毛刺、气泡、变形、浇口拉伤、缺料等不良现象.

Plastic surface smooth and clean, no obvious burrsbubbles, distortion, gate strain, lack of material and otherundesirable phenomena.

PIN number variable size comparison table

Part No	Pin	A	B	C
W125210-2PY113	2	1.25	4.30	3.00
W125210-3PY113	3	2.50	5.55	4.25
W125210-4PY113	4	3.75	6.80	5.50
W125210-5PY113	5	5.00	8.05	6.75
W125210-6PY113	6	6.25	9.30	8.00
W125210-7PY113	7	7.50	10.55	9.25
W125210-8PY113	8	8.75	11.80	10.50
W125210-9PY113	9	10.00	13.05	11.75
W125210-10PY113	10	11.25	14.30	13.00
W125210-11PY113	11	12.50	15.55	14.25
W125210-12PY113	12	13.75	16.80	15.50
W125210-13PY113	13	15.00	18.05	16.75
W125210-14PY113	14	16.25	19.30	18.00
W125210-15PY113	15	17.50	20.55	19.25
W125210-16PY113	16	18.75	21.80	20.50

GENERAL TOLERANCES
UNLESS SPECIFIED

X.X ± 0.30 X.* $\pm 5^\circ$

.XX ± 0.20 X.X* $\pm 1^\circ$

.XXX ± 0.10 X.XX* $\pm 0.5^\circ$

MANUFACTURE DWG



深圳市华明通电子有限公司

HMTCONN

Shenzhen Huamingtong Electronics Co., Ltd

PART NO.

W125210-XPY113

DESIGN: James

CHED: Talen

APPD: Sophia

TITLE:

MX1.25MM HOUSING

CUSTOMER

SCALE

N:A

SIZE

A4

SHEET

1/1

UNITS

MM

SHEET

1/1