

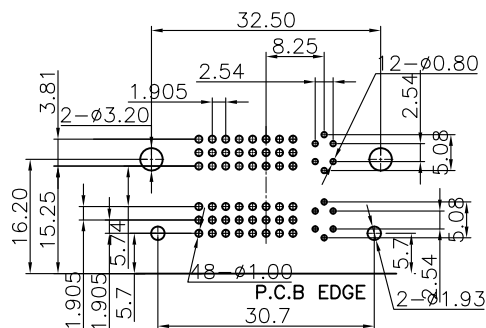



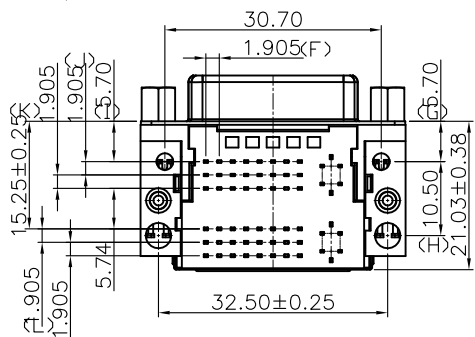

INSPECTION DIMENSION:(A)~(L)

1. DVI
- 1.1 Voltage: 40 VAC(RMS) Max.
- 1.2 Current Rating: 1.5 Ampere per Contact
- 1.3 Contact Resistance(UPPER): 30 Milliohms Max.
Contact Resistance(LOWER): 20 Milliohms Max.
- 1.4 Insulation Resistance: 1000 Megohms Min.
- 1.5 Dielectric Withstanding Voltage: 500V DC(RMS)
- 1.6 Total Mating Force: 4.5 Kgf Max.
- 1.7 Total Unmating Force: 1.0 Kgf Min.
- 1.8 Operating Temperature: -55°C to +85°C

1. MATERIAL:
Housing(UPPER):LCP, UL 94V-0, Color:Black.
Housing(LOWER):LCP, UL 94V-0, Color:Black.
Terminal:Copper Alloy.
Shell:SPCC.
Shield:Stainless Steel.
Boardlock:Copper Alloy.
Bracket:Zinc Alloy.
Screw:Copper Alloy.
2. FINISH:
Terminal:Gold Plated over Nickel at Contact Area.
Tin Plated over Nickel at Solder Ared.
Shell:Nickel Plated.
Boardlock:Tin Plated.
Bracket:Nickel Plated.
Screw:Nickel Plated.
3. This Product is LEAD-FREE & RoHS Compliance Product.



深圳市华宇创精密电子有限公司

TOLERANCE:		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME:	
X.X ±0.30	X.XX ±0.25			双层DVI 上下24+5 间距20.4	
X.XXX ±0.15		CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYCW34-DVI58-204B
X: ±2" X.X: ±0.5"				MOLD NO.	
		APPROVED BY:	DATE :	DRAW NO:	HYC-2107272134
UNIT: mm [inch]				SHEET NO.	1 OF 1
SCALE:1:1	SIZE: A4	邱敏	2014-02-23		