

FEATURES

- **EXPANDED VALUE RANGE & REDUCED CASE SIZES**
- MOLDED CONSTRUCTION FOR HIGH SOLDERING HEAT RESISTANCE
- ELEVEN CASE SIZES (J, P, A2, A, B2, B, C2, C, V, D AND E)
- BOTH FLOW AND REFLOW SOLDERING APPLICABLE
- TAPE & REEL PACKAGING COMPATIBLE WITH AUTOMATIC PICK & PLACE EQUIPMENT

**RoHS
Compliant**
includes all homogeneous materials



*See Part Number System for Details

SPECIFICATIONS & PERFORMANCE CHARACTERISTICS

Capacitance Range	0.1μF to 680μF									
Capacitance Tolerance	±20% (M), ±10% (K)									
Rated Voltage Range @ 85°C (Vdc)	2.5	4.0	6.3	10	16	20	25	35	50	
Surge Voltage Rating @ 85°C (Vdc)	3.3	5.2	8.0	13	20	28	33	46	85	
Derated Voltage @ 125°C (Vdc)	1.8	2.5	4.0	6.3	10	13	16	22	32	
Operating Temperature Range	-55°C to +85°C (to +125°C with Derating)									
Dissipation Factor	See Case Size and Specifications Table									
Leakage Current @ +25°C (After 5 Minutes at Rated Voltage)	Not More Than 0.01CV or 0.5μA, whichever is greater									
Capacitance Change With Temperature	-55°C			+85°C			+125°C			
A2, A, B2, B, C, D & E Case Size	ΔC - 12%			ΔC ± 12%			ΔC ± 12%			
J & P Case Size	ΔC - 20%			ΔC ± 20%			ΔC ± 20%			
Resistance to Soldering Heat (+260°C for 5 Seconds)	ΔC ± 5%* Max, LC = Less than initial specification. DF = Less than initial specification									
Moisture Resistance (500 hours; 90~95% RH @ 40°C)	ΔC ± 5%* Max, LC = Less than initial specification. DF = 150% of initial specification									
Temperature Cycling (5 cycles; -55°C ~ +125°C)	ΔC ± 5%* Max, LC = Less than initial specification. DF = Less than initial specification									
Load Life (at Rated Voltage) (2,000 hours @ 85°C)	ΔC ± 10%* Max, LC = 125% of initial specification. DF = Less than initial specification									
Base Failure Rate (1.0Ω/Volt)	1%/1000 hours at 60% confidence level (+85°C)									

*±12% ~ ±15% for extended values, ±20% for J & P case size values

RIPPLE CURRENT CORRECTION FACTOR:

Ambient Temperature	25°C	+55°C	+85°C	+105°C	+125°C
Correction Factor	1.0	0.90	0.80	0.40	0.15

RIPPLE CURRENT/VOLTAGE RATINGS:

$$I_{max.} = \sqrt{\frac{P_d}{ESR}} \quad V_{max.} = Z \cdot \sqrt{\frac{P_d}{ESR}}$$

$I_{max.}$ = Ripple Current rating (Arms)

P_d = Power dissipation (watt)

ESR = Equivalent series resistance (ohm)

$V_{max.}$ = Ripple voltage rating (Vrms)

Z = The capacitors impedance (ohm) = $\sqrt{(ESR)^2 + (XL - XC)^2}$

POWER DISSIPATION @ 25°C (FREE AIR) & EQUIVALENT SERIES INDUCTANCE (ESL)

Case Code	Pd Max. (W)	ESL (nH)
P	0.025	1.00
A2	0.050	1.20
A	0.070	1.20
B2	0.070	1.50
B	0.080	1.50
C2	0.090	
C	0.110	2.70
V	0.125	
D	0.150	3.00
E	0.165	3.00

PART NUMBER SYSTEM

NTC-T 106 M 16 TR B E

Series | Capacitance Code | Tolerance Code: K=±10%, M=± 20% | Voltage | Packaging: TR=Tape/Reel | Case Code | RoHS Compliant

PRECAUTIONS

Please review the notes on correct use, safety and precautions found on pages T10 & T11 of NIC's Electrolytic Capacitor catalog.
Also found at www.niccomp.com/precautions
If in doubt or uncertainty, please review your specific application - process details with NIC's technical support personnel: tpmg@niccomp.com



STANDARD AND EXTENDED PRODUCT SPECIFICATIONS TABLE

*Extended Case Sizes
Chart show Case Size, Max. Tan δ @ 120Hz/+20°C, Max. ESR @ 100KHz/+20°C

Cap (μ F)	Code	Working Voltage (Vdc)									
		2.5	4.0	6.3	10	16	20	25	35		
0.1	104	-	-	-	-	-	A2*6%/40 Ω	-	A 4%/18 Ω	-	-
0.15	154	-	-	-	-	-	A2*6%/35 Ω	-	A 4%/18 Ω	-	A 4%/19 Ω
0.22	224	-	-	-	-	-	A2*6%/35 Ω	-	A 4%/18 Ω	-	B 4%/14 Ω
0.33	334	-	-	-	-	P 10%/40 Ω	A2*6%/30 Ω	-	A 4%/15 Ω	-	B 4%/10 Ω
0.47	474	-	-	-	-	P 10%/35 Ω	A2*6%/27 Ω	A 4%/14 Ω	A*6%/12 Ω B 4%/8.0 Ω	-	B 4%/9.0 Ω
0.68	684	-	-	-	P 10%/25 Ω	P 10%/25 Ω A2*6%/25 Ω	A2*6%/15 Ω A 4%/12 Ω	A*6%/10 Ω	A*6%/9.0 Ω B 4%/5.4 Ω	-	C 4%/7.0 Ω
1.0	105	-	-	P 10%/25 Ω	P 10%/25 Ω A2*8%/25 Ω	J 10%/30 Ω P 20%/25 Ω A1*6%/16 Ω A 4%/10 Ω	A2*6%/13 Ω A*6%/9.0 Ω	P 6%/8.0Ω A2 6%/13Ω A*6%/8.0 Ω	A2 6%/13 Ω A*6%/8.0 Ω B 4%/4.8 Ω	-	C 4%/5.5 Ω
1.5	155	-	P 10%/25 Ω	P 10%/25 Ω A2*8%/25 Ω	J 20%/30 Ω P 20%/25 Ω A2*8%/20 Ω A 4%/8.0 Ω	J 10%/25Ω A2*6%/13 Ω A 4%/8.0 Ω	A2*6%/13 Ω A*6%/6.5 Ω	A*6%/8.0 Ω B 4%/4.6 Ω	A*6%/8.0 Ω B*6%/4.0 Ω C 4%/3.0 Ω	-	C 4%/4.0 Ω
2.2	225	P 10%/25 Ω	P 10%/25 Ω A2*8%/25 Ω	J 20%/20 Ω P 20%/20 Ω A2*8%/18 Ω A 4%/8.0 Ω	J 20%/30 Ω P 20%/20 Ω A2*8%/12 Ω A 4%/7.0 Ω	P 10%/19Ω A2*6%/13 Ω A*6%/6.0 Ω	P 10%/8.0Ω A2 6%/7.0Ω A*6%/6.0 Ω B 4%/3.5 Ω	A*6%/8.0 Ω B*6%/4.0 Ω	A 6%/5Ω B*6%/4.2 Ω C 4%/3.0 Ω	-	D 4%/1.8 Ω
3.3	335	P 10%/25 Ω	P 20%/20 Ω A2*8%/18 Ω A 4%/8.0 Ω	J 20%/20 Ω P 20%/13 Ω A2*8%/9.0 Ω A 4%/7.5 Ω	J 20%/25Ω P 20%/20 Ω A2*8%/12 Ω A*8%/5.5 Ω	P 10%/8.0Ω A2 8%/7.0Ω A*6%/5.0 Ω B 4%/3.5 Ω	A2 8%/5.0Ω A*6%/5.0 Ω B2 6%/3.9Ω B*6%/3.0 Ω	A 6%/7.0Ω B*6%/4.0 Ω C 4%/2.5 Ω	B2 6%/3.0Ω B*6%/4.0 Ω C 4%/2.5 Ω D 4%/2.0 Ω	-	D 4%/1.4 Ω
4.7	475	P 20%/20 Ω A2*8%/18 Ω	P 20%/12 Ω A2*8%/10 Ω A 4%/7.5 Ω	J 20%/15 Ω P 20%/12 Ω A2*8%/7.5 Ω A*8%/6.0 Ω	J 20%/10Ω P 20%/10 Ω A2*8%/8.0 Ω A*8%/5.0 Ω B 4%/3.5 Ω	A2 8%/4.5Ω A*6%/5.0 Ω B*6%/3.0 Ω	A2 15%/5.0Ω A*6%/5.0 Ω B2 6%/3.0Ω B*6%/3.0 Ω C 4%/2.4 Ω	B2 6%/3.0Ω B*6%/3.0 Ω C 4%/2.4 Ω	C*6%/2.2 Ω D 4%/1.5 Ω	-	D 4%/1.4 Ω
6.8	685	P 20%/20 Ω A2*8%/16 Ω	J 20%/15 Ω P 20%/12 Ω A2*8%/8.0 Ω A*8%/6.0 Ω	J 20%/7.0Ω P 20%/12 Ω A2*8%/7.5 Ω A*8%/5.0 Ω B 6%/3.5 Ω	A2 8%/8.0Ω A*8%/4.5 Ω B 8%/3.0 Ω	A2*6%/5.0 Ω A*6%/5.0 Ω B2 6%/5.0 Ω B*6%/2.5 Ω C 6%/1.9 Ω	B2 6%/3.0Ω B*6%/2.8 Ω C 6%/1.9 Ω	B 6%/2.5Ω C*6%/1.9 Ω D 6%/1.4 Ω	C*6%/1.9 Ω D 6%/1.3 Ω	-	-
10	106	J 20%/12 Ω P 20%/12 Ω A2*8%/15 Ω	J 20%/12 Ω P 20%/12 Ω A2*12%/8.0 Ω A*8%/5.0 Ω B 6%/3.5 Ω	J 20%/8.0 Ω P 20%/12 Ω A2*8%/10 Ω A*8%/4.0 Ω B 6%/3.0 Ω	P 20%/6.0Ω A2 8%/5.0 Ω A*8%/3.2 Ω B2*8%/3.2 Ω B*8%/2.5 Ω C 6%/1.8 Ω	A 8%/5.0 Ω B2 8%/4.0 Ω B*6%/2.4 Ω C 6%/1.8 Ω	B*6%/2.5 Ω C*6%/1.8 Ω D 6%/1.3 Ω	C2 6%/2.0Ω C*6%/1.8 Ω D 6%/1.2 Ω	C 6%/1.5Ω D 6%/1.0Ω E*6%/1.0 Ω	-	-
15	156	J 20%/8.0Ω A2*12%/10 Ω A*8%/5.0 Ω	P 20%/12 Ω A2*12%/8.0 Ω A*8%/4.0 Ω B*8%/3.0 Ω	P 20%/5.0Ω A2 12%/4.0 Ω A*8%/3.5 Ω B2*8%/3.5 Ω B*8%/2.5 Ω C 6%/1.8 Ω	A2 20%/3.0Ω B2*8%/2.5 Ω C 6%/1.8 Ω	A 12%/5.0Ω B2*6%/2.5 Ω C*6%/1.8 Ω D 6%/1.8 Ω	C*6%/1.7 Ω D 6%/0.8 Ω	C 6%/1.5Ω D*6%/1.0 Ω	D*6%/0.9 Ω	-	-
22	226	P 20%/4.0Ω A2*12%/10 Ω A*8%/4.0 Ω	P 20%/5.0 Ω A2 12%/4.0 Ω A*8%/3.5 Ω B2*8%/3.5 Ω B*8%/2.8 Ω C 6%/1.8 Ω	P 20%/4.0Ω A2 12%/2.8Ω A*10%/4.5 Ω B2*12%/4.5 Ω B*8%/2.3 Ω C 6%/1.8 Ω	A 12%/2.5Ω B2 12%/4.0 Ω B*8%/2.4 Ω C*8%/1.8 Ω D 6%/1.5 Ω	B2 10%/2.2Ω B*6%/2.5 Ω C*6%/1.6 Ω D 6%/0.8 Ω	C2 6%/1.4Ω C*6%/1.5 Ω D*6%/0.8 Ω	D*6%/0.8 Ω	-	-	-
33	336	P 20%/5.0 Ω A2 12%/4.0Ω A*8%/3.5 Ω B2*8%/3.5 Ω B*8%/3.0 Ω	P 20%/4.0Ω A2 8%/4.5Ω A*10%/4.5 Ω B212%/4.5 Ω B*8%/2.4 Ω C 6%/1.8 Ω	A2 18%/3.0Ω A 12%/5.0 Ω B2 12%/1.7Ω B*8%/2.0 Ω C*8%/1.6 Ω D 6%/0.8 Ω	B2 12%/1.7Ω B*8%/2.0 Ω C*8%/1.6 Ω D 6%/0.8 Ω	B 8%/1.4Ω C2 6%/1.4Ω C*6%/1.2 Ω D*6%/0.8 Ω	D*6%/0.8 Ω	D 6%/0.7Ω	-	-	-

Highlighting Denotes New Values

STANDARD AND EXTENDED PRODUCT SPECIFICATIONS TABLE

*Extended Case Sizes
Chart Shows Case Sizes, Max. Tan δ @120Hz/20°C, Max. ESR @ 100KHz/20°C


Cap (μ F)	Code	Working Voltage (Vdc)						
		2.5	4.0	6.3	10	16	20	25
47	476	P 30%/6.0 Ω A2 12%/4.5 Ω A*12%/4.5 Ω B2*12%/4.5 Ω B*8%/2.4 Ω	P 30%/3.0 Ω A2 15%/4.5 Ω A 12%/5.0 Ω B2 12%/3.0 Ω B*8%/2.0 Ω C*8%/1.8 Ω D 6%/1.2 Ω	A 12%/2.0 Ω B2 12%/3.0 Ω B*8%/2.0 Ω C*8%/1.6 Ω D 6%/0.8 Ω	B 8%/3.0 Ω C2 8%/1.0 Ω C*8%/1.6 Ω D*8%/0.8 Ω	C*6%/1.2 Ω D*6%/0.8 Ω	D*6%/0.8 Ω	
68	686	A 18%/3.0 Ω B*8%/2.0 Ω	A 12%/2.5 Ω B2 15%/3.0 Ω B*8%/2.0 Ω C*8%/1.6 Ω D 6%/0.8 Ω	A 30%/2.0 Ω B2 20%/2.0 Ω B*10%/1.8 Ω C2 10%/0.8 Ω C*8%/1.2 Ω D*8%/0.8 Ω	B 12%/0.9 Ω C2 10%/1.0 Ω C*8%/1.2 Ω D*8%/0.8 Ω	C 6%/0.7 Ω D*6%/0.7 Ω	-	
100	107	A 30%/2.0 Ω B2 18%/2.0 Ω B*8%/2.0 Ω	A 30%/2.0 Ω B2 20%/1.3 Ω B*12%/2.0 Ω C2 10%/0.8 Ω C*8%/1.2 Ω D*8%/0.8 Ω	B2 20%/1.3 Ω B 12%/1.2 Ω C2 10%/0.8 Ω C*10%/0.9 Ω D*8%/0.8 Ω	C2 10%/0.8 Ω C 10%/1.2 Ω V 8%/0.5 Ω D*8%/0.7 Ω	D*10%/1.0 Ω	-	-
150	157	A 30%/2.0 Ω B2 20%/1.0 Ω B*16%/5.0 Ω C2 12%/0.8 Ω	B 18%/2.0 Ω C2 10%/0.8 Ω C*10%/1.0 Ω D*8%/0.7 Ω	B 12%/1.0 Ω C 10%/1.2 Ω D*8%/0.7 Ω	V 8%/0.5 Ω D*10%/0.7 Ω	D*6%/0.9 Ω	-	-
220	227	B2 30%/1.0 Ω B 18%/2.0 Ω C2 12%/0.8 Ω C*12%/1.0 Ω	B 18%/0.5 Ω C 12%/1.2 Ω D*8%/0.7 Ω	C 14%/1.2 Ω V 12%/0.5 Ω D*12%/0.8 Ω	D 12%/1.0 Ω E*8%/0.9 Ω	-	-	-
330	337	B 25%/0.6 Ω C 16%/1.2 Ω	C 14%/1.2 Ω V 12%/0.5 Ω D*14%/0.7 Ω	V 14%/0.5 Ω D 14%/1.0 Ω	-	-	-	-
470	477	B 35%/0.6 Ω C 18%/1.2 Ω D*14%/0.7 Ω	D 16%/1.0 Ω	D 20%/0.3 Ω	-	-	-	-
680	687		D 24%/0.3 Ω	-	-	-	-	-

Highlighting Denotes New Values


DIMENSIONS (mm)

Case Code	Metric Code	English Code	L	W	H	P	a
J	1608	0603	1.6 $\pm$ 0.1	0.8 $\pm$ 0.1	0.8 $\pm$ 0.1	0.3 $\pm$ 0.15	0.6 $\pm$ 0.1
P	2012	0805	2.0 $\pm$ 0.2	1.25 $\pm$ 0.2	1.2 MAX.	0.5 $\pm$ 0.2	0.9 $\pm$ 0.1
A2	3216	1206	3.2 $\pm$ 0.2	1.6 $\pm$ 0.2	1.2 MAX.	0.8 $\pm$ 0.3	1.2 $\pm$ 0.1
A	3216	1206	3.2 $\pm$ 0.2	1.6 $\pm$ 0.2	1.6 $\pm$ 0.2	0.8 $\pm$ 0.3	1.2 $\pm$ 0.1
B2	3528	1411	3.5 $\pm$ 0.2	2.8 $\pm$ 0.2	1.2 MAX.	0.8 $\pm$ 0.3	2.3 $\pm$ 0.1
B	3528	1411	3.5 $\pm$ 0.2	2.8 $\pm$ 0.2	1.9 $\pm$ 0.2	0.8 $\pm$ 0.3	2.2 $\pm$ 0.1
C2	6032	2412	6.0 $\pm$ 0.3	3.2 $\pm$ 0.3	1.5 MAX.	1.3 $\pm$ 0.3	2.2 $\pm$ 0.1
C	6032	2412	6.0 $\pm$ 0.3	3.2 $\pm$ 0.3	2.6 $\pm$ 0.3	1.3 $\pm$ 0.3	2.2 $\pm$ 0.1
V	7343	2916	7.3 $\pm$ 0.2	4.3 $\pm$ 0.2	2.0 MAX.	1.3 $\pm$ 0.3	2.4 $\pm$ 0.1
D	7343	2916	7.3 $\pm$ 0.2	4.3 $\pm$ 0.2	2.9 $\pm$ 0.3	1.3 $\pm$ 0.3	2.4 $\pm$ 0.1
E	7343H	2917	7.3 $\pm$ 0.2	4.3 $\pm$ 0.2	4.1 $\pm$ 0.2	1.3 $\pm$ 0.3	2.4 $\pm$ 0.1

J, P, A, A2, C, V, D & E CASE SIZE



B & B2 CASE SIZE

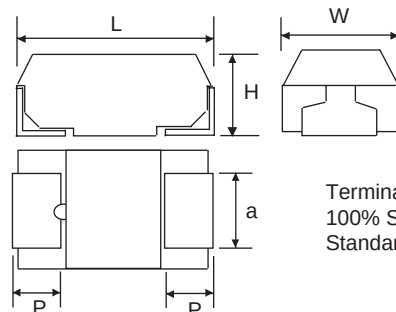

Terminations:
100% Sn (Lead-Free)
Standard



CAPACITANCE CODES

Cap. (μF)	STD EIA Code	EIA Code 198D	Code for P Case Size	Code for J Case Size				
				2.5Vdc	4Vdc	6.3Vdc	10Vdc	16Vdc
0.1	104	A5	-	-	-	-	-	C
0.15	154	E5	-	-	-	-	-	-
0.22	224	J5	-	-	-	-	-	-
0.33	334	N5	N	-	-	-	-	-
0.47	474	S5	S	-	-	-	-	-
0.68	684	W5	W	-	-	-	-	-
1.0	105	A6	A	-	-	-	-	-
1.5	155	E6	E	-	-	-	A	-
2.2	225	J6	J	-	-	Γ	Δ	-
3.3	335	N6	N	-	-	Π	-	-
4.7	475	S6	S	-	-	J	⋈	-
6.8	685	W6	W	-	G	Λ	-	-
10	106	A7	Ā	e	ϖ	Γ	-	-
22	226	J7	J̄	-	-	-	-	-
33	336	N7	N̄	-	-	-	-	-
47	476	S7	S̄	-	-	-	-	-

VOLTAGE CODES




Voltage	Code
2.5	e
4	G
6.3	J
10	A
16	C
20	D
25	E
35	V
50	H

COMPONENT MARKING

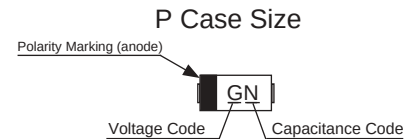


PRODUCTION CODE

Year	Month											
	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sept	Oct	Nov	Dec
2005	A	B	C	D	E	F	G	H	J	K	L	M
2006	N	P	Q	R	S	T	U	V	W	X	Y	Z
2007	a	b	c	d	e	f	g	h	j	k	l	m
2008	n	p	q	r	s	t	u	v	w	x	y	z

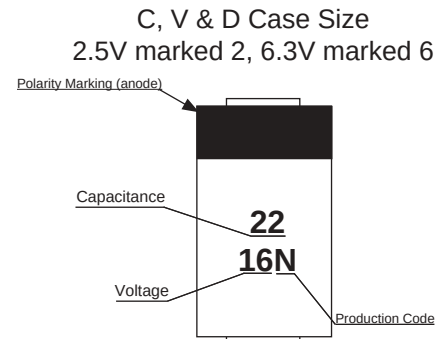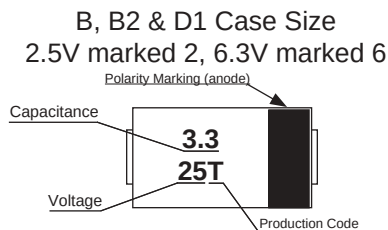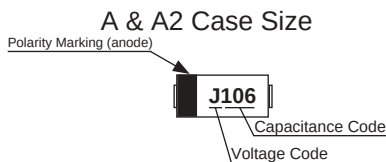


Flow/Reflow Soldering
Maximum Temperature/Time: Flow 260°C/5 Sec.
Reflow 260°C/10 Sec.

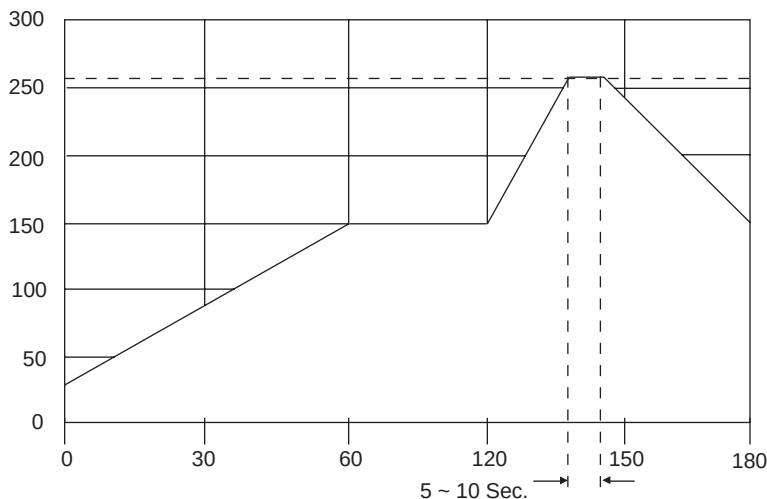


RECOMMENDED LAND PATTERN DIMENSIONS (mm)

Case Size	a	b	c
J	0.90	0.70	1.00
P	1.05	0.50	1.20
A & A2	1.35	1.10	1.50
B & B2	1.35	1.40	2.70
C	2.00	2.90	2.70
D	2.05	4.10	2.90
D	2.05	4.10	2.90



TAPE DIMENSIONS (mm)


Metric Code	Case Code	$A_0 \pm 0.2$	$B_0 \pm 0.2$	$W \pm 0.3$	$F \pm 0.05$	$P_0 \pm 0.1$	$P_0 \pm 0.1$	$P_0 \pm 0.05$	$G \pm 0.1$	$K \pm 0.2$	T	7" Reel
1608	J	1.0	1.8	8.0	3.5	4.0	2.0	2.0	1.75	1.1	0.2	4000
2012	P	1.4	2.2	8.0	3.5	4.0	4.0	2.0	1.75	1.4	0.2	3000
3216	A2	1.0	3.5	8.0	3.5	4.0	4.0	2.0	1.75	1.4	0.2	3000
3216	A	1.9	3.5	8.0	3.5	4.0	4.0	2.0	1.75	1.9	0.2	2000
3528	B2	3.2	3.8	8.0	3.5	4.0	4.0	2.0	1.75	1.4	0.2	3000
3528	B	3.2	3.8	8.0	3.5	4.0	4.0	2.0	1.75	2.1	0.2	2000
6032	C	3.7	6.4	12.0	5.65	4.0	8.0	2.0	1.5	3.0	0.3	500
7343	D	4.8	7.7	12.0	5.65	4.0	8.0	2.0	1.5	3.3	0.3	500
7343H	E	4.7	7.7	12.0	5.5	4.0	8.0	2.0	1.5	4.5	0.6	500

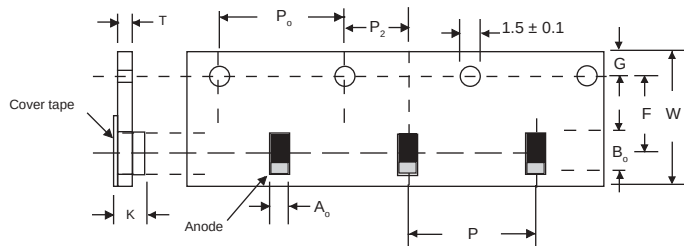

Cover tape peel-off specification

1. Peel-off speed : 300 mm/min.
2. Peel-off force : $F = 30 - 75g$
3. Peel-off angle : $\Theta = 0 - 15^\circ$

Peel-off speed
(F) = 50mm/Sec.

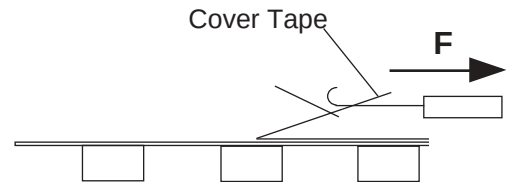

REEL DIMENSIONS (mm)

Tape Width	A	C	D	E	N	W_1	W_2
8mm	178 ± 2.0	13 ± 0.5	21 ± 0.5	2.0 ± 0.5	50 min.	10 ± 2.0	14.5 max.
12mm	178 ± 2.0	13 ± 0.5	21 ± 0.5	2.0 ± 0.5	50 min.	14.5 ± 2.0	18.5 max.

