
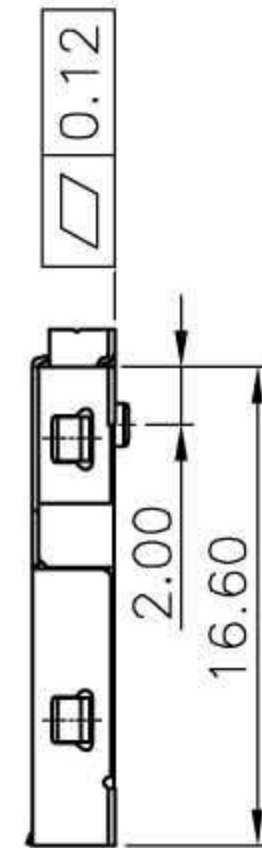


版次 REV	變更通知單號 ECN NO	說明 DESCRIPTION	日期 DATE	修改 DRAW	核准 APPROVE

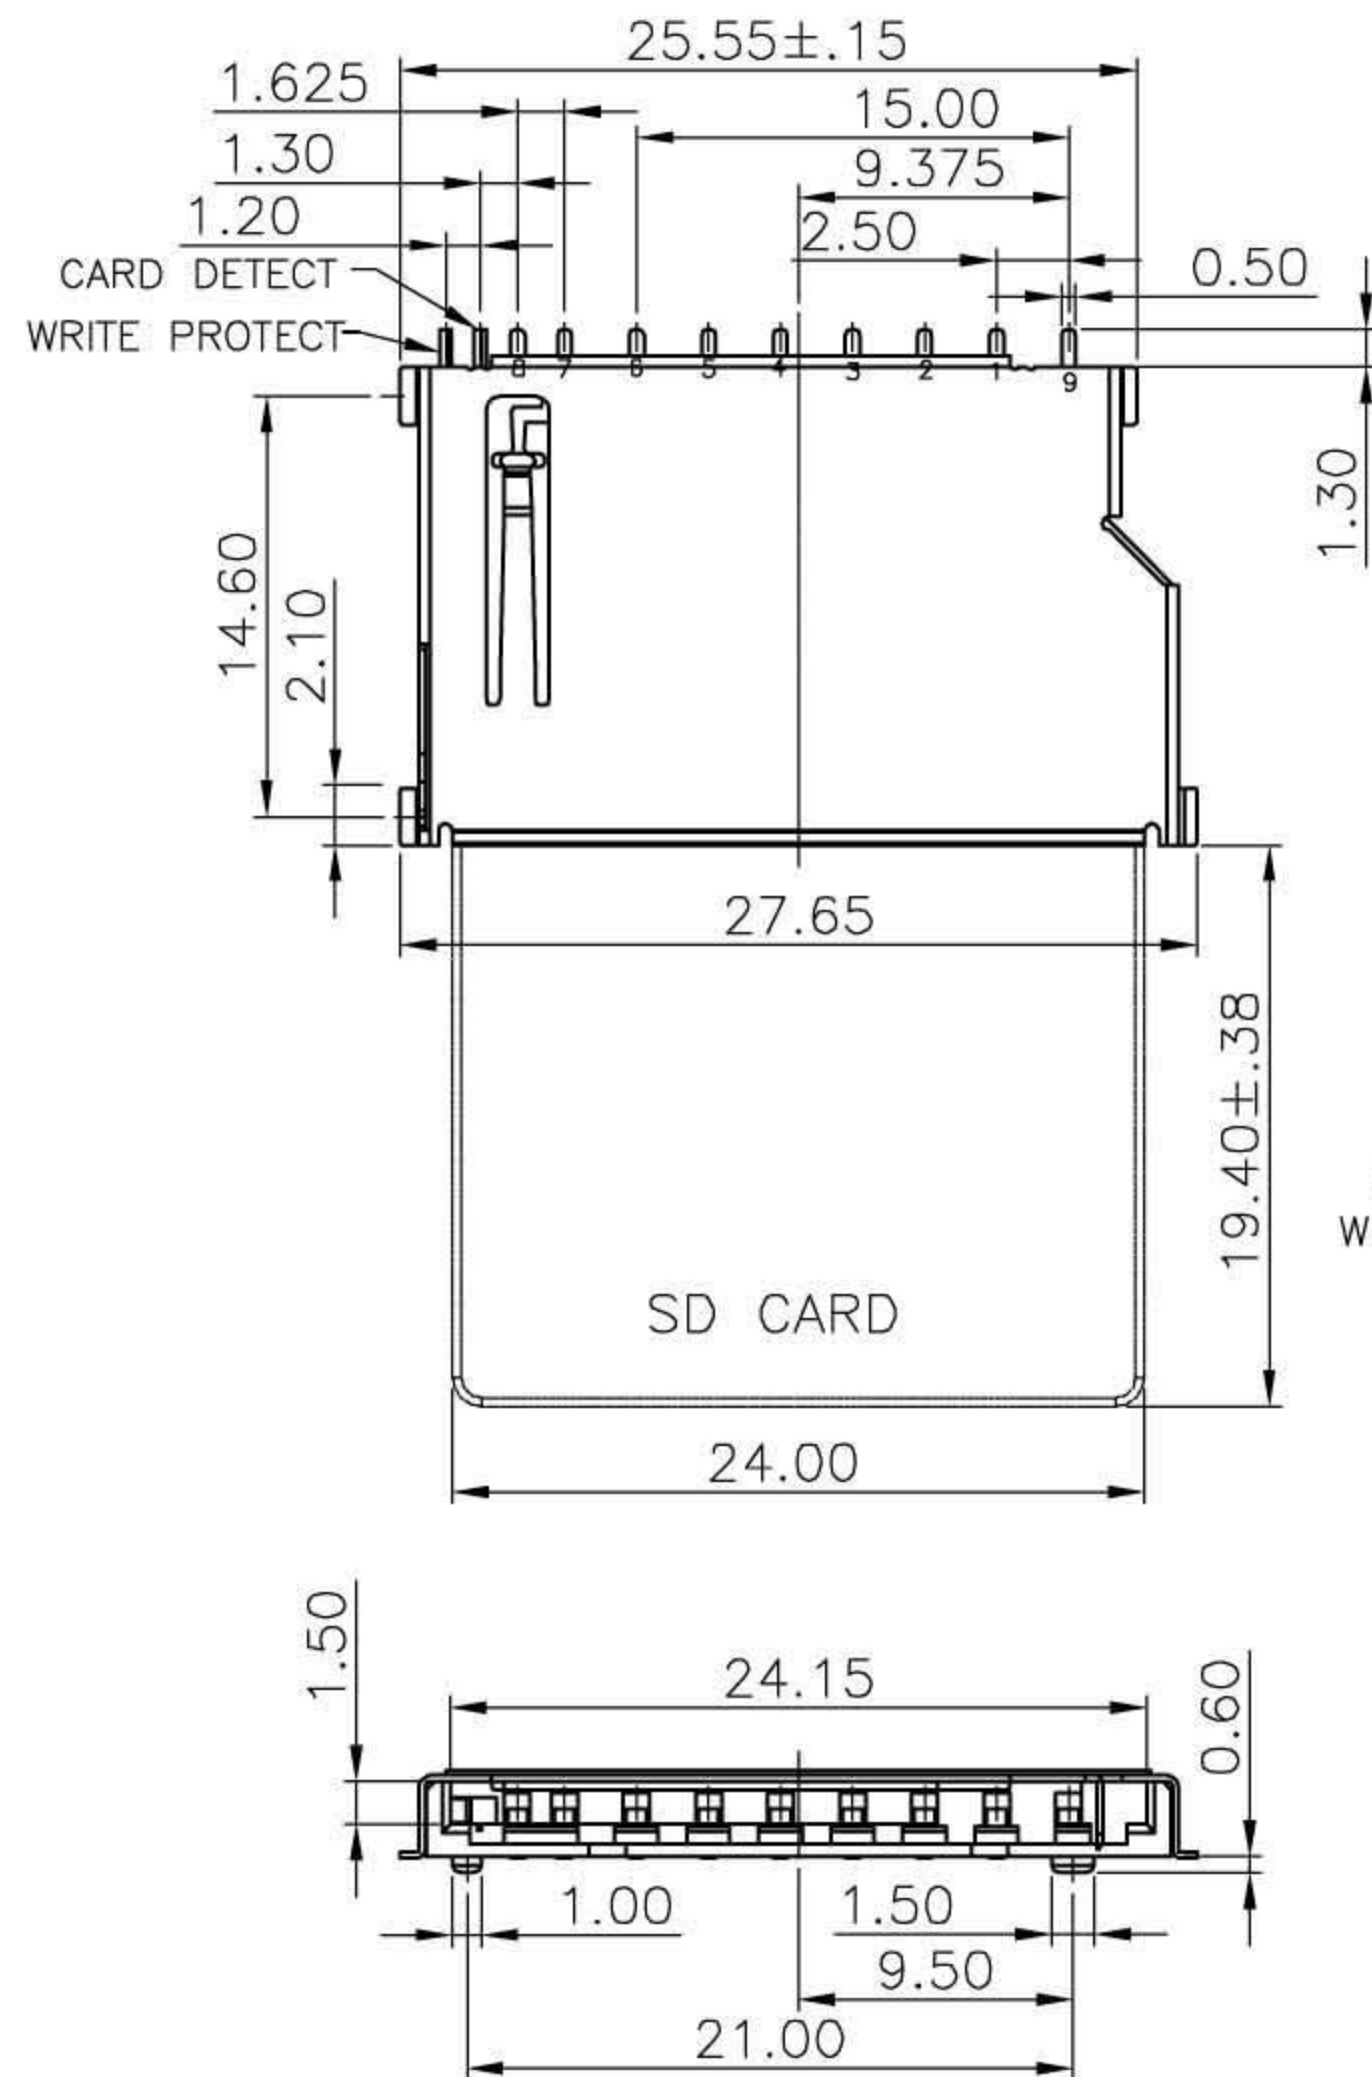

Pin No.	NAME
1	CD/DAT3
2	CMD
3	Vss1
4	VDD
5	CLK
6	Vss2
7	DAT0
8	DAT1
9	DAT2

Specification

*Electrical Characteristics:

Contact Current Rating:0.5 Amperes.
Dielectric Withstanding Voltage:AC500V r.m.s.
Insulation Resistance:1000 MΩ Minimum.
Contact Resistance:40 mΩ Maximum.

*Environmental:


Operating Temperature:-20°C~+60°C.

*Mechanical Characteristics:

Contact Insertion Force:1.00kgf Maximum.
Contact Separation Force:0.20kgf Minimum.

*Material:

Insulator:HI-Temp Plastic UL 94V-0 Rated.
Contact:Copper Alloy(t=0.20mm).
Shell:Stainless Steel(t=0.20mm).
Spring:Copper Alloy(t=0.15mm).

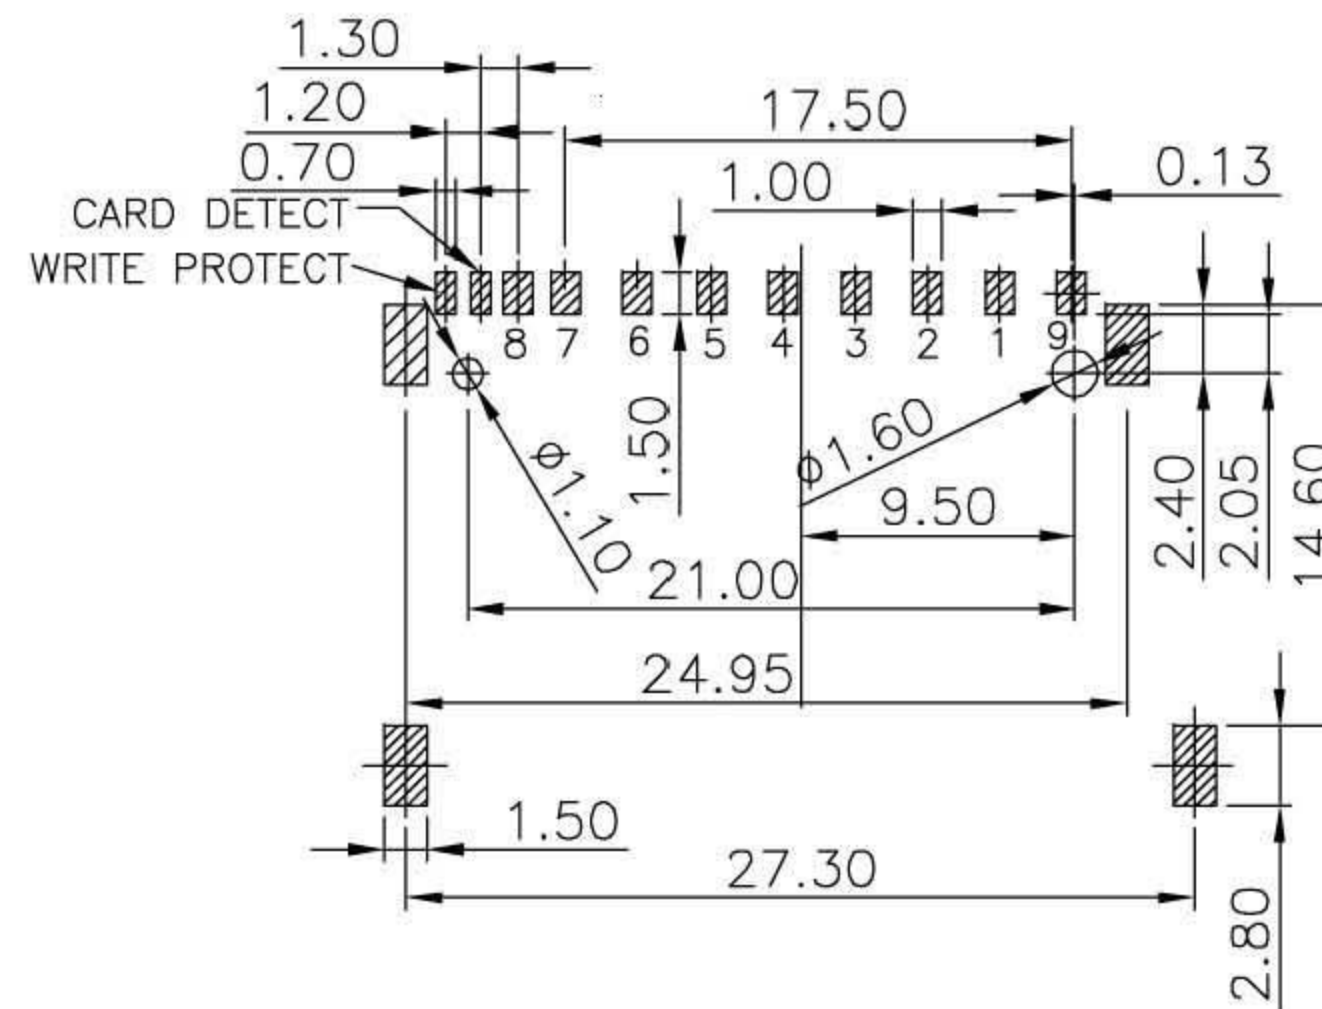

RECOMMENDED P.C.B LAYOUT
(General tolerance ±0.05)

張數 SHEET	1/1	單位 UNIT	MM	公差 TOLERANCE UNLESS	L&X 深圳市连欣科技有限公司	
日期 DATE	06/01/12	角法 PROJ.			名稱 TITLE	SD CARD 短体卡座
製圖 DRAWING		版本 REV.	A	X.±0.40	圖號 DWG NO.	
審核 CHECKED		比例 SCALE	1:2	.X±0.30	料號 PRAT NO.	LXSD-0526-0935
核准 APPROVE	jack.yu	客戶圖 CUSTOMER DRAWING		.XX±0.20		
				X.*±5°		