


G

Current Rating: 1.5 Amps
Withstanding Voltage: AC 500V
Insulation Resistance: 1000M Ω Min
Contact Resistance: 20m Ω Max
Operation Temperature: -40° to +105°
Insulator Material: Polyester
Contact Material: Brass
Standard: PA6T
Contact Plating: Gold Flash
Max. Processing Temp: 200°C for 30-60 seconds
(255°C for 5 seconds)



Technical drawing of a 5-hole plate. The plate has a total width of 200 mm and a total height of 100 mm. The distance between the centers of the first two holes is 2.0 units. The diameter of each hole is $\phi 0.8$. The distance from the center of the third hole to the right edge is labeled 'A'.

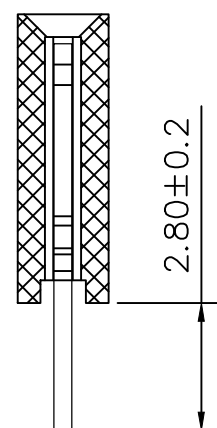