




NOTES:





- 1.HUOSING: PA9T HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK
- 2.TERMINAL:PHOSPHOR BRONZE
PLATING:1μ" GOLD FLASH OVERALL 50~100μ" NICKEL UNDER PLATED.

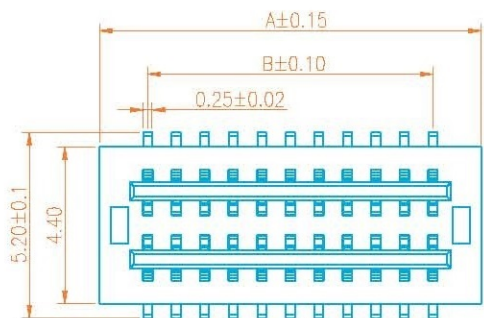

MATING HEIGHT
SCALE:1.25:1



3D VIEW

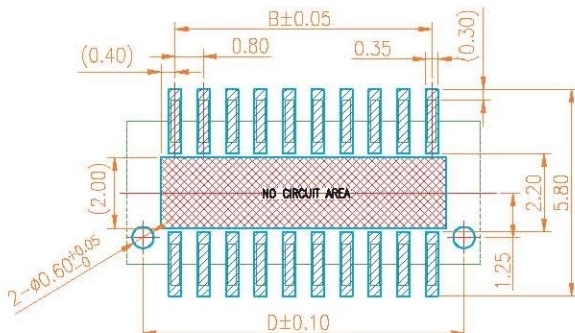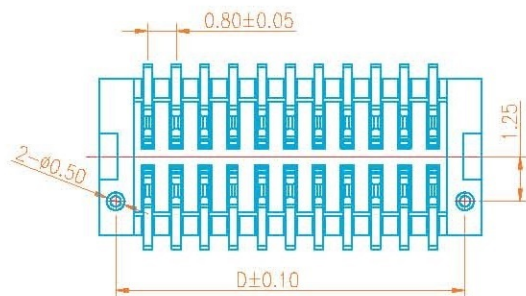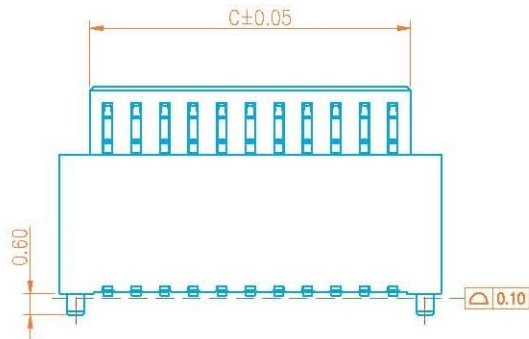

RECOMMENDED PCB PATTERN DIM.

TOLERANCE : ±0.05

MATING HEIGHT	PLUG (H.)	SOCKET (H.)	NO.of contacts	Dimensions				NO.of contacts	Dimensions			
				A.	B.	C.	D.		A.	B.	C.	D.
4.0	1.95	2.05	4	3.50	0.80	1.80	2.60	54	23.50	20.80	21.80	22.60
4.5	0.95	3.45	6	4.30	1.60	2.60	3.40	56	24.30	21.60	22.60	23.40
5.0	1.45	3.45	8	5.10	2.40	3.40	4.20	58	25.10	22.40	23.40	24.20
5.5	1.95	3.45	10	5.90	3.20	4.20	5.00	60	25.90	23.20	24.20	25.00
6.0	2.45	3.45	12	6.70	4.00	5.00	5.80	62	26.70	24.00	25.00	25.80
6.5	2.95	3.45	14	7.50	4.80	5.80	6.60	64	27.50	24.80	25.80	26.60
7.0	4.0	3.0	16	8.30	5.60	6.60	7.40	66	28.30	25.60	26.60	27.40
7.5	4.0	3.45	18	9.10	6.40	7.40	8.20	68	29.10	26.40	27.40	28.20
8.0	4.0	4.0	20	9.90	7.20	8.20	9.00	70	29.90	27.20	28.20	29.00
8.5	4.0	4.5	22	10.70	8.00	9.00	9.80	72	30.70	28.00	29.00	29.80
			24	11.50	8.80	9.80	10.60	74	31.50	28.80	29.80	30.60
			26	12.30	9.60	10.60	11.40	76	32.30	29.60	30.60	31.40
			28	13.10	10.40	11.40	12.20	78	33.10	30.40	31.40	32.20
			30	13.90	11.20	12.20	13.00	80	33.90	31.20	32.20	33.00
			32	14.70	12.00	13.00	13.80	82	34.70	32.00	33.00	33.80
			34	15.50	12.80	13.80	14.60	84	35.50	32.80	33.80	34.60
			36	16.30	13.60	14.60	15.40	86	36.30	33.60	34.60	35.40
			38	17.10	14.40	15.40	16.20	88	37.10	34.40	35.40	36.20
			40	17.90	15.20	16.20	17.00	90	37.90	35.20	36.20	37.00
			42	18.70	16.00	17.00	17.80	92	38.70	36.00	37.00	37.80
			44	19.50	16.80	17.80	18.60	94	39.50	36.80	37.80	38.60
			46	20.30	17.60	18.60	19.40	96	40.30	37.60	38.60	39.40
			48	21.10	18.40	19.40	20.20	98	41.10	38.40	39.40	40.20
			50	21.90	19.20	20.20	21.00	100	41.90	39.20	40.20	41.00

CUSTOMER

深圳市连欣科技有限公司

一般公差
GENERAL TOLERANCE
.X ±0.10
.XX ±0.05
.XXX ±0.02
ANGLES ±0° 50'

制图 (DR): Kevin 2018.07.15

品名(TITLE): 0.8mm 双槽BTB PLUG

审核 (CHKD):

料号(PART NO): XDBM-08** (高) -**P

核准 (APPD):

比例(SCALE): 1:8

单位(UNITS): mm

张数(SHEET): 1 OF 1



图幅(SIZE): A4

RoHS Compliant
2013/05/EC




产品料号修正	Kevin	12/01/18
修订 SER	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE
	日期 DATE	





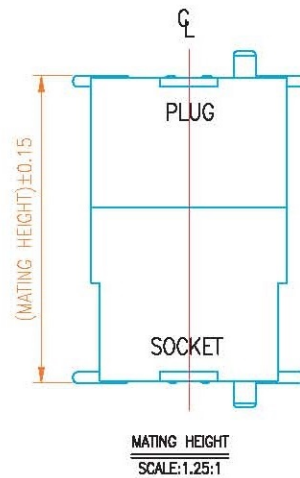
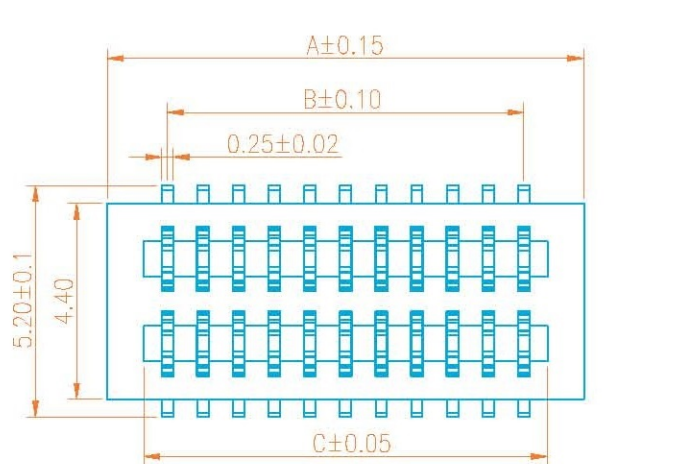


NOTES:

- 1.HUOSING: PA9T HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK
- 2.TERMINAL:PHOSPHOR BRONZE
PLATING:1μ" GOLD FLASH OVERALL 50~100μ" NICKEL UNDER PLATED.



3D VIEW

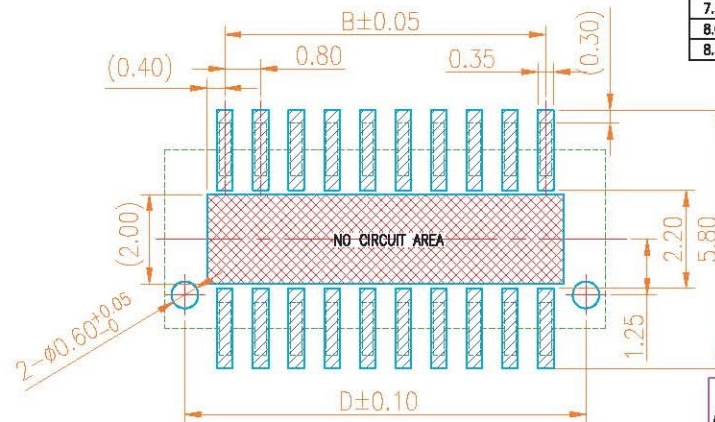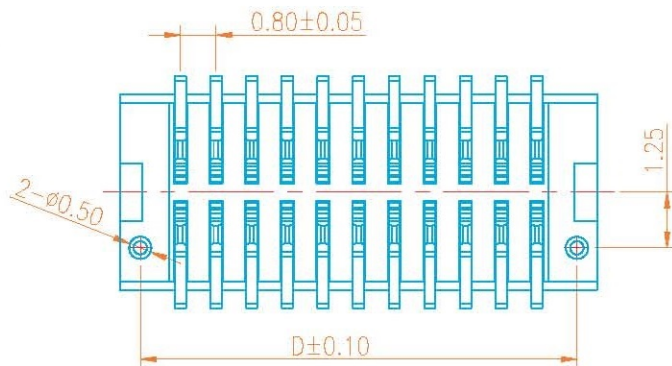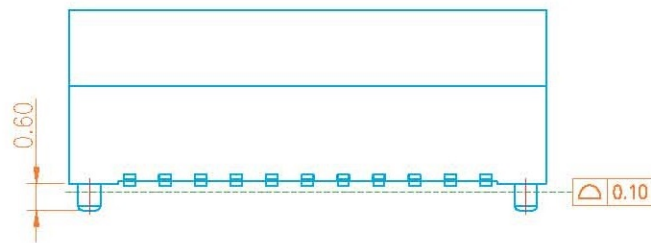

RECOMMENDED PCB PATTERN DIM.

TOLERANCE : ±0.05

MATING HEIGHT	PLUG (H.)	SOCKET (H.)	NO.of contacts	Dimensions				NO.of contacts	Dimensions			
				A.	B.	C.	D.		A.	B.	C.	D.
4.0	1.95	2.05	4	3.50	0.80	1.86	2.60	54	23.50	20.80	21.86	22.60
4.5	0.95	3.45	6	4.30	1.60	2.66	3.40	56	24.30	21.60	22.66	23.40
5.0	1.45	3.45	8	5.10	2.40	3.46	4.20	58	25.10	22.40	23.46	24.20
5.5	1.95	3.45	10	5.90	3.20	4.26	5.00	60	25.90	23.20	24.26	25.00
6.0	2.45	3.45	12	6.70	4.00	5.06	5.80	62	26.70	24.00	25.06	25.80
6.5	2.95	3.45	14	7.50	4.80	5.86	6.60	64	27.50	24.80	25.86	26.60
7.0	4.0	3.0	16	8.30	5.60	6.66	7.40	66	28.30	25.60	26.66	27.40
7.5	4.0	3.45	18	9.10	6.40	7.46	8.20	68	29.10	26.40	27.46	28.20
8.0	4.0	4.0	20	9.90	7.20	8.26	9.00	70	29.90	27.20	28.26	29.00
8.5	4.0	4.5	22	10.70	8.00	9.06	9.80	72	30.70	28.00	29.06	29.80
			24	11.50	8.80	9.86	10.60	74	31.50	28.80	29.86	30.60
			26	12.30	9.60	10.66	11.40	76	32.30	29.60	30.66	31.40
			28	13.10	10.40	11.46	12.20	78	33.10	30.40	31.46	32.20
			30	13.90	11.20	12.26	13.00	80	33.90	31.20	32.26	33.00
			32	14.70	12.00	13.06	13.80	82	34.70	32.00	33.06	33.80
			34	15.50	12.80	13.86	14.60	84	35.50	32.80	33.86	34.60
			36	16.30	13.60	14.66	15.40	86	36.30	33.60	34.66	35.40
			38	17.10	14.40	15.46	16.20	88	37.10	34.40	35.46	36.20
			40	17.90	15.20	16.26	17.00	90	37.90	35.20	36.26	37.00
			42	18.70	16.00	17.06	17.80	92	38.70	36.00	37.06	37.80
			44	19.50	16.80	17.86	18.60	94	39.50	36.80	37.86	38.60
			46	20.30	17.60	18.66	19.40	96	40.30	37.60	38.66	39.40
			48	21.10	18.40	19.46	20.20	98	41.10	38.40	39.46	40.20
			50	21.90	19.20	20.26	21.00	100	41.90	39.20	40.26	41.00

CUSTOMER 深圳市连欣科技有限公司

一般公差
GENERAL TOLERANCE
.1
.25
.5
ANGLES
±0° 50'

制图 (DR): Kevin 2016.07.15
品名 (TITLE): 0.8mm 双槽BTB SOCKET
审核 (CHKD):
料号 (PART NO): XDBF-08** (高) -**P
比例 (SCALE): 1:8
单位 (UNITS): mm
张数 (SHEET): 1 OF 1
图幅 (SIZE): A4


RoHS Compliant
2013/05/EC



产品料号修正
修订
修改摘要
REVISION DESCRIPTION
签名
SIGNATURE
日期
DATE
12/01/16'


版本 (REV): A

Tape width 16 and 24 mm

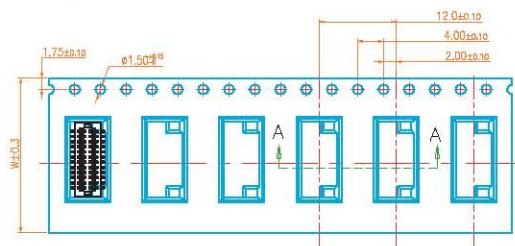

PULL OUT DIRECTION


Tape width 32 and 56 mm

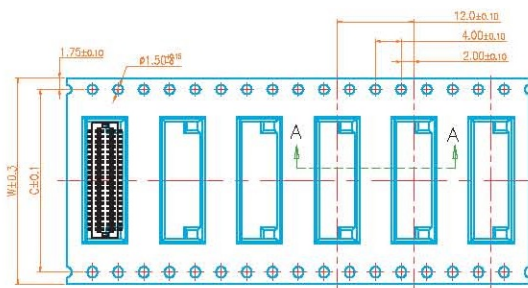


PULL OUT DIRECTION

NOTE:

1. Sprocket hole pitch cumulative tolerance ± 0.20 .
2. Carrier camber is within 1mm in 100mm.
3. Material: black conductive polystyrene alloy.
4. Material Thickness: 0.3 ± 0.05 mm.
5. All dimensions meet EIA-481-B requirements.
6. 5000pcs Pef Reel.
7. For tape width(dim W)16 and 24mm pilot holes are provided on one sides.
For tape width(dim W)32, 44 and 56mm pilot holes are provided on both sides.

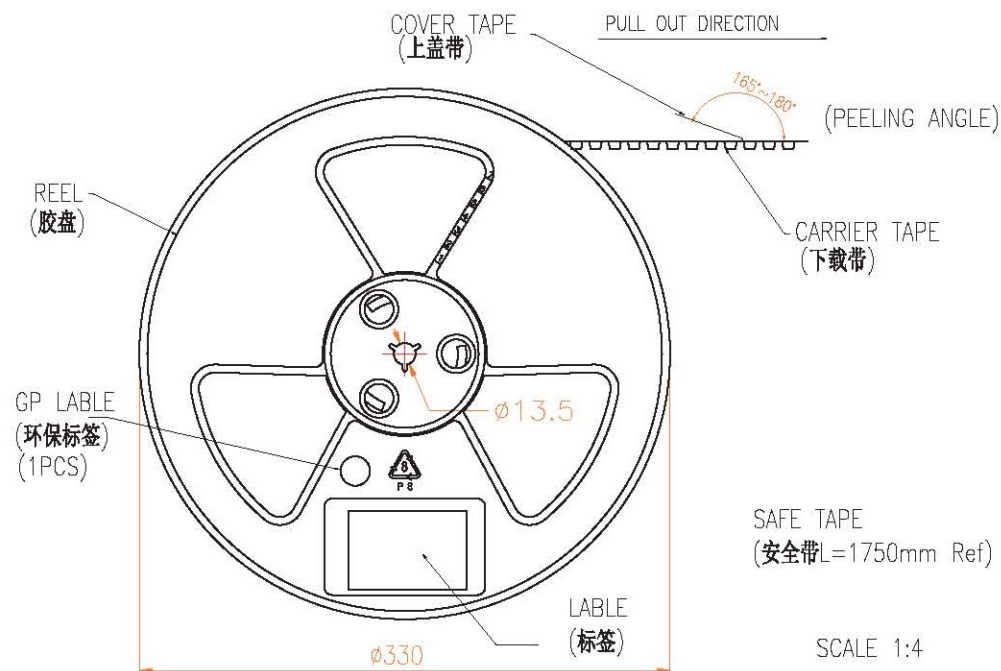

PIN NO.	W	C	PCS /REEL	REEL/CARTON	SUM(PCS)
4PIN~14PIN	16	-	1000	15	15000
16PIN~34PIN	24	-	1000	10	10000
36PIN~44PIN	32	28.4	1000	8	8000
46PIN~740PIN	44	40.4	1000	6	6000
76PIN~100PIN	56	52.4	1000	5	5000

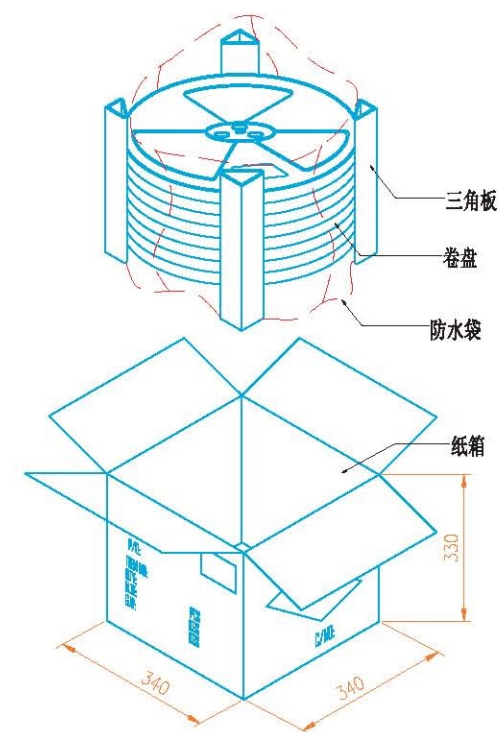

深圳市连欣科技有限公司



一般公差 GENERAL TOLERANCE .1 .1X .1X ANGLES ±0.10 ±0.05 ±0.02 ±1°				版本 (REV) A 修改摘要 REVISION DESCRIPTION 签名 SIGNATURE 日期 DATE				制图 (DR) Karin 2018.07.09 品名 (TITLE) BOARD to BOARD EMBOSSD TAPE PACKING 审核 (CHD) 料号 (PART NO) XDBM/F-08**-**P 比例 (SCALE) 1:1 单位 (UNITS) mm 张数 (SHEET) 1 OF 1 图幅 (SIZE) A4			
修订	修改摘要	签名	日期	版本	制图	审核	核准	比例	单位	张数	图幅
SER	DESCRIPTION	SIGNATURE	DATE	REV	DR	CHD	APPD	SCALE	UNITS	SHEET	SIZE