

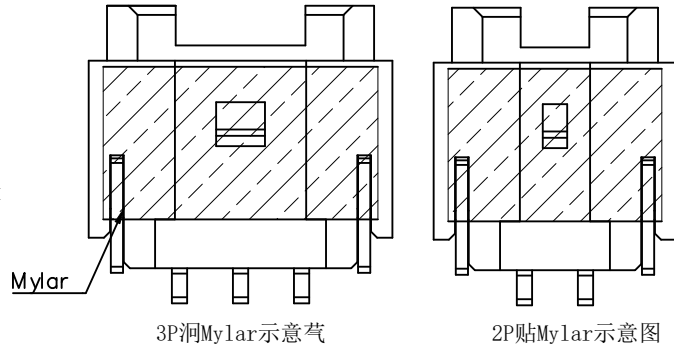



序号	品名	材质
①	2.0 R型卧式WTB胶芯 2.0 Pitch R/A Wire To Board Housing(H=5.7)	PA6T UL94V-0 米黄色 LCP UL94V-0 本色
②	2.0 R型卧式WTB端子 2.0 Pitch R/A Wire To Board Terminal(H=5.7)	铜合金/表面镀锡 Copper Alloy/ Tin Plating
③	2.0 R型卧式WTB焊片 2.0 Pitch R/A Wire To Board Fitting Nail(H=5.7)	铜合金/表面镀锡 Copper Alloy/ Tin Plating

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
(The surface of the plastic parts should be smooth, no rough edges, no obvious shrinkage, defects, cracks and other phenomena)
2. 工作温度 (Temperature range): $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$.
3. 额定电压 (Rated voltage): 250V, AC/DC.
4. 额定电流: 3.0A, AC/DC.
5. 接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$.
6. 绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$.
7. 耐电压 (Withstanding voltage): 800V AC/minute.
8. 产品料号 (Product material No.):



CKT	A	B	C	D
2	2.0	4.55	7.95	6.1
3	4.0	6.55	9.95	8.1
4	6.0	8.55	11.95	10.1
5	8.0	10.55	13.95	12.1
6	10.0	12.55	15.95	14.1
7	12.0	14.55	17.95	16.1
8	14.0	16.55	19.95	18.1
9	16.0	18.55	21.95	20.1
10	18.0	20.55	23.95	22.1
11	20.0	22.55	25.95	24.1
12	22.0	24.55	27.95	26.1
13	24.0	26.55	29.95	28.1
14	26.0	28.55	31.95	30.1
15	28.0	30.55	33.95	32.1
16	30.0	32.55	35.95	34.1

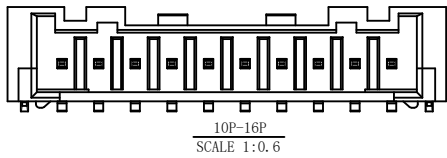

一般公差 (TOLERANCE)

X. $\pm .50$	.XX $\pm .10$
.X $\pm .20$	.XXX $\pm .05$
ANGLES	$\pm 1^\circ$

ZGWD 浙江温达电子有限公司
ZHEJIANG WENDA ELECTRONICS CO., LTD

品名 (TITLE)		2.00 Pitch R型卧式WTB		制图 (DR)		ANLAN	
		2.0 PITCH H5.7 R/A WIRE TO BOARD SMT CONN.		校对 (CHKD)		田峰	
料号 (DWG.NO)		WT200R1W-*****-***		审核 (APPD)		黄志明	
比例 (SCALE)		单位 (UNITS) mm				张数 (SHEET) 1 OF 1	
						SIZE A4	
						REV A	