


## ■銅スリーブ入絶縁付丸形端子(ストレート形)




UL LISTED E42024 SP LR20812

| 形 番        | 規 格   | 寸 法(mm) |      |      |      |     |     |     | 色 | 適用電線範囲                                                                               | 適用圧着工具   |                                                                                  |           | 1箱<br>入数<br>(個) |
|------------|-------|---------|------|------|------|-----|-----|-----|---|--------------------------------------------------------------------------------------|----------|----------------------------------------------------------------------------------|-----------|-----------------|
|            |       | φd2     | B    | L    | F    | ℓ   | φD  | 板厚  |   | 燃線(mm <sup>2</sup> )                                                                 | 手 動      | 空 気 圧 式                                                                          | 油 圧 式     |                 |
| VD0.5-2    | UL SP | 2.2     | 5.2  | 16.4 | 5.8  | 8.0 | 2.2 | 0.5 | 黄 | 0.2~0.5<br>(0.2 (AWG#24)<br>0.3 (AWG#22)<br>0.5)                                     | YNT-2622 | YA-1,YAT-1A<br>YA-2,YAT-2A<br>YAD-1A<br>YAD-2A                                   | BCT-0514L | 1,000           |
| VD0.5-3    | UL SP | 3.2     | 5.2  | 16.4 | 5.8  |     |     |     |   |                                                                                      |          |                                                                                  |           |                 |
| VD0.5-4    | UL SP | 4.3     | 6.6  | 19.0 | 7.7  |     |     |     |   |                                                                                      |          |                                                                                  |           |                 |
| VD0.5-5    | UL SP | 5.3     | 8.0  |      | 7.0  |     |     |     |   |                                                                                      |          |                                                                                  |           |                 |
| VD1.25-3   | UL SP | 3.2     | 5.5  | 16.3 | 4.0  | 9.6 | 3.5 | 0.8 | 赤 | 0.25~1.65<br>(0.3 (AWG#22)<br>0.5 (AWG#20)<br>0.75 (AWG#18)<br>0.9<br>1.25 (AWG#16)) | YNT-2216 | YA-1<br>YA-2<br>YAT-1A<br>YAT-2A<br>YAD-1A<br>YAD-2A<br>YA-4<br>YAT-4A<br>YAD-4A | BCT-0514L | 1,000           |
| VD1.25-MS3 | UL SP |         | 5.5  | 18.0 | 5.6  |     |     |     |   |                                                                                      |          |                                                                                  |           |                 |
| VD1.25-L3  | UL SP |         | 8.0  | 20.6 | 7.0  |     |     |     |   |                                                                                      |          |                                                                                  |           |                 |
| VD1.25-3.7 | UL SP | 3.7     | 5.5  | 16.3 | 4.0  |     |     |     |   |                                                                                      |          |                                                                                  |           |                 |
| VD1.25-M3  | UL SP |         | 6.6  | 19.2 | 6.3  |     |     |     |   |                                                                                      |          |                                                                                  |           |                 |
| VD1.25-M4  | UL SP |         | 6.6  | 19.2 | 6.3  |     |     |     |   |                                                                                      |          |                                                                                  |           |                 |
| VD1.25-4   | UL SP | 4.3     | 8.0  | 20.6 | 7.0  |     |     |     |   |                                                                                      |          |                                                                                  |           |                 |
| VD1.25-5   | UL SP | 5.3     | 8.0  | 20.6 | 7.0  |     |     |     |   |                                                                                      |          |                                                                                  |           |                 |
| VD1.25-6   | UL SP | 6.4     | 11.6 | 26.5 | 11.1 |     |     |     |   |                                                                                      |          |                                                                                  |           |                 |
| VD1.25-8   | UL SP | 8.4     | 11.6 | 26.5 | 11.1 |     |     |     |   |                                                                                      |          |                                                                                  |           |                 |
| VD1.25-10  | UL SP | 10.5    | 13.6 | 30.3 | 13.9 |     |     |     |   |                                                                                      |          |                                                                                  |           |                 |
| VD2-MS3    | UL SP | 3.2     | 5.5  | 18.0 | 5.6  | 9.6 | 4.1 | 0.8 | 青 | 1.04~2.63<br>(1.25 (AWG#16)<br>2.0 (AWG#14))                                         | YNT-1614 | YA-1<br>YA-2<br>YAT-1A<br>YAT-2A<br>YAD-1A<br>YAD-2A<br>YA-4<br>YAT-4A<br>YAD-4A | BCT-0514L | 1,000           |
| VD2-S3.3   | UL SP |         | 6.4  | 17.1 | 4.3  |     |     |     |   |                                                                                      |          |                                                                                  |           |                 |
| VD2-S3     | UL SP |         | 6.4  | 17.1 | 4.3  |     |     |     |   |                                                                                      |          |                                                                                  |           |                 |
| VD2-P3.5   | UL SP | 3.7     | 7.0  | 20.8 | 7.7  |     |     |     |   |                                                                                      |          |                                                                                  |           |                 |
| VD2-M3     | UL SP |         | 6.6  | 19.2 | 6.3  |     |     |     |   |                                                                                      |          |                                                                                  |           |                 |
| VD2-M4     | UL SP |         | 6.6  | 19.2 | 6.3  |     |     |     |   |                                                                                      |          |                                                                                  |           |                 |
| VD2-4      | UL SP | 4.3     | 8.5  | 21.6 | 7.8  |     |     |     |   |                                                                                      |          |                                                                                  |           |                 |
| VD2-M5     | UL SP | 5.3     | 9.5  | 21.6 | 7.3  |     |     |     |   |                                                                                      |          |                                                                                  |           |                 |
| VD2-5      | UL SP |         | 9.5  | 21.6 | 7.3  |     |     |     |   |                                                                                      |          |                                                                                  |           |                 |
| VD2-6      | UL SP | 6.4     | 12.0 | 26.6 | 11.0 |     |     |     |   |                                                                                      |          |                                                                                  |           |                 |
| VD2-8      | UL SP | 8.4     | 12.0 | 26.6 | 11.0 |     |     |     |   |                                                                                      |          |                                                                                  |           |                 |
| VD2-14     | UL SP | 15.0    | 27.0 | 44.3 | 21.2 |     |     |     |   |                                                                                      |          |                                                                                  |           | 250             |


注1) 本製品の中には多少納期を要するものもあります。

注2) VD0.5-( )におけるUL登録の適用電線はAWG#26~AWG#22です。

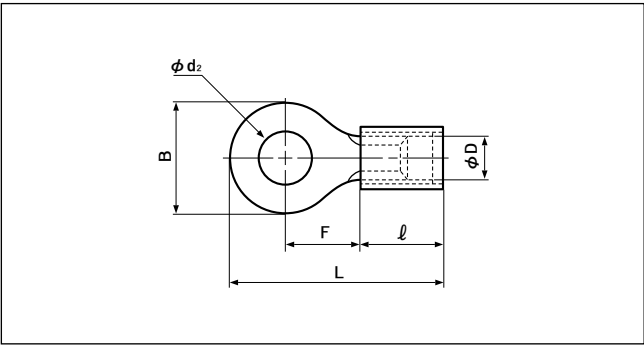


| 形 番      | 規 格                                                                                                                                                                 | 寸 法(mm) |      |      |      |      |     |     | 色 | 適用電線範圍                                        | 適用圧着工具    |                          |           | 1箱<br>入数<br>(個) |  |  |  |  |  |  |  |  |  |
|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|------|------|------|------|-----|-----|---|-----------------------------------------------|-----------|--------------------------|-----------|-----------------|--|--|--|--|--|--|--|--|--|
|          |                                                                                                                                                                     | ød2     | B    | L    | F    | ℓ    | øD  | 板厚  |   | 撚線(mm <sup>2</sup> )                          | 手 動       | 空 気 圧 式                  | 油 圧 式     |                 |  |  |  |  |  |  |  |  |  |
| VD5.5-3  |   | 3.2     | 9.5  | 27.0 | 8.3  | 14.0 | 5.7 | 1.0 | 黄 | 2.63~6.64<br>( 3.5 (AWG#12)<br>5.5 (AWG#10) ) | YNT-1210S | YA-4<br>YAT-4A<br>YAD-4A | BCT-0514L | 500             |  |  |  |  |  |  |  |  |  |
| VD5.5-S4 |   | 4.3     | 7.2  | 23.5 | 5.9  |      |     |     |   |                                               |           |                          |           |                 |  |  |  |  |  |  |  |  |  |
| VD5.5-4  |   |         | 9.5  | 27.0 | 8.3  |      |     |     |   |                                               |           |                          |           |                 |  |  |  |  |  |  |  |  |  |
| VD5.5-5  |   | 5.3     | 15.0 | 35.2 | 13.7 |      |     |     |   |                                               |           |                          |           |                 |  |  |  |  |  |  |  |  |  |
| VD5.5-6  |   | 6.4     |      |      |      |      |     |     |   |                                               |           |                          |           |                 |  |  |  |  |  |  |  |  |  |
| VD5.5-8  |   | 8.4     |      |      |      |      |     |     |   |                                               |           |                          |           |                 |  |  |  |  |  |  |  |  |  |
| VD5.5-10 |   | 10.5    |      |      |      |      |     |     |   |                                               |           |                          |           |                 |  |  |  |  |  |  |  |  |  |
| VD5.5-14 |   | 15.0    | 32.0 | 55.3 | 25.3 |      |     |     |   |                                               |           |                          |           | 250             |  |  |  |  |  |  |  |  |  |
| VD5.5-18 |   | 19.0    |      |      |      |      |     |     |   |                                               |           |                          |           |                 |  |  |  |  |  |  |  |  |  |

注) 本製品の中には多少納期を要するものもあります。



## ■銅スリーブ入絶縁付丸形端子(F形)

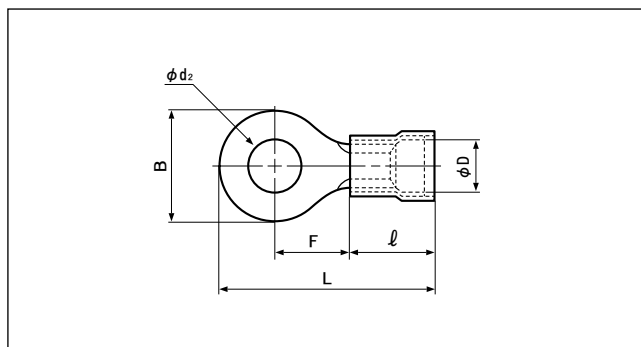


UL LISTED E42024

SP LR20812

| 形 番         | 規 格                                                                                                                                                                     | 寸 法(mm) |      |      |      |     |     |      | 色   | 適用電線範圍                                                                               | 適用圧着工具   |                                                                                  |           | 1箱<br>入数<br>(個) |     |     |     |   |                                                |          |                                                                                  |           |       |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|------|------|------|-----|-----|------|-----|--------------------------------------------------------------------------------------|----------|----------------------------------------------------------------------------------|-----------|-----------------|-----|-----|-----|---|------------------------------------------------|----------|----------------------------------------------------------------------------------|-----------|-------|
|             |                                                                                                                                                                         | ød2     | B    | L    | F    | ℓ   | øD  | 板厚   |     | 燃線(mm <sup>2</sup> )                                                                 | 手 動      | 空 気 圧 式                                                                          | 油 圧 式     |                 |     |     |     |   |                                                |          |                                                                                  |           |       |
| FVD0.5-2    |       | 2.2     | 5.2  | 16.7 | 5.8  | 8.3 | 2.5 | 0.5  | 黄   | 0.2~0.5<br>〔 0.2 (AWG#24)<br>0.3 (AWG#22)<br>0.5 〕                                   | YNT-2622 | YA-1,YAT-1A<br>YA-2,YAT-2A<br>YAD-1A<br>YAD-2A                                   | BCT-0514L | 1,000           |     |     |     |   |                                                |          |                                                                                  |           |       |
| FVD0.5-3    |       | 3.2     |      |      |      |     |     |      |     |                                                                                      |          |                                                                                  |           |                 |     |     |     |   |                                                |          |                                                                                  |           |       |
| FVD0.5-4    |       | 4.3     | 6.6  | 19.3 | 7.7  |     |     |      |     |                                                                                      |          |                                                                                  |           |                 |     |     |     |   |                                                |          |                                                                                  |           |       |
| FVD0.5-5    |       | 5.3     | 8.0  |      | 7.0  |     |     |      |     |                                                                                      |          |                                                                                  |           |                 |     |     |     |   |                                                |          |                                                                                  |           |       |
| FVD1.25-3   |       | 3.2     | 5.5  | 16.3 | 4.0  | 9.6 | 4.0 | 0.8  | 赤   | 0.25~1.65<br>〔 0.3 (AWG#22)<br>0.5 (AWG#20)<br>0.75(AWG#18)<br>0.9<br>1.25(AWG#16) 〕 | YNT-2216 | YA-1<br>YA-2<br>YAT-1A<br>YAT-2A<br>YAD-1A<br>YAD-2A<br>YA-4<br>YAT-4A<br>YAD-4A | BCT-0514L | 1,000           |     |     |     |   |                                                |          |                                                                                  |           |       |
| FVD1.25-MS3 |       |         |      |      | 18.0 |     |     |      |     |                                                                                      |          |                                                                                  |           |                 | 5.6 |     |     |   |                                                |          |                                                                                  |           |       |
| FVD1.25-M3  |       | 3.7     | 6.6  | 19.2 | 6.3  |     |     |      |     |                                                                                      |          |                                                                                  |           |                 |     |     |     |   |                                                |          |                                                                                  |           |       |
| FVD1.25-M4  |       | 4.3     |      |      |      |     |     |      |     |                                                                                      |          |                                                                                  |           |                 |     |     |     |   |                                                |          |                                                                                  |           |       |
| FVD1.25-4   |       |         |      | 8.0  | 20.6 |     |     |      |     |                                                                                      |          |                                                                                  |           |                 | 7.0 |     |     |   |                                                |          |                                                                                  |           |       |
| FVD1.25-5   |       | 5.3     |      |      |      |     |     |      |     |                                                                                      |          |                                                                                  |           |                 |     |     |     |   |                                                |          |                                                                                  |           |       |
| FVD1.25-6   |       | 6.4     | 11.6 | 26.5 | 11.1 |     |     |      |     |                                                                                      |          |                                                                                  |           |                 |     |     |     |   |                                                |          |                                                                                  |           |       |
| FVD1.25-8   |       | 8.4     |      |      |      |     |     |      |     |                                                                                      |          |                                                                                  |           |                 |     |     |     |   |                                                |          |                                                                                  |           |       |
| FVD2-MS3    |     | 3.2     | 5.5  | 18.0 | 5.6  |     |     |      |     |                                                                                      |          |                                                                                  |           |                 | 9.6 | 4.7 | 0.8 | 青 | 1.04~2.63<br>〔 1.25 (AWG#16)<br>2.0 (AWG#14) 〕 | YNT-1614 | YA-1<br>YA-2<br>YAT-1A<br>YAT-2A<br>YAD-1A<br>YAD-2A<br>YA-4<br>YAT-4A<br>YAD-4A | BCT-0514L | 1,000 |
| FVD2-S3.3   |   |         | 6.4  | 17.1 | 4.3  |     |     |      |     |                                                                                      |          |                                                                                  |           |                 |     |     |     |   |                                                |          |                                                                                  |           |       |
| FVD2-3      |   |         | 8.5  | 21.6 | 7.8  |     |     |      |     |                                                                                      |          |                                                                                  |           |                 |     |     |     |   |                                                |          |                                                                                  |           |       |
| FVD2-S3     |   | 3.7     | 6.4  | 17.1 | 4.3  |     |     |      |     |                                                                                      |          |                                                                                  |           |                 |     |     |     |   |                                                |          |                                                                                  |           |       |
| FVD2-M3     |   |         | 6.6  | 19.2 | 6.3  |     |     |      |     |                                                                                      |          |                                                                                  |           |                 |     |     |     |   |                                                |          |                                                                                  |           |       |
| FVD2-M4     |   | 4.3     |      |      |      |     | 7.0 | 20.8 | 7.7 |                                                                                      |          |                                                                                  |           |                 |     |     |     |   |                                                |          |                                                                                  |           |       |
| FVD2-P4     |   |         |      | 8.5  | 21.6 | 7.8 |     |      |     |                                                                                      |          |                                                                                  |           |                 |     |     |     |   |                                                |          |                                                                                  |           |       |
| FVD2-4      |   |         | 5.3  |      |      |     |     |      |     |                                                                                      |          |                                                                                  |           |                 |     |     |     |   |                                                |          |                                                                                  |           |       |
| FVD2-M5     |   |         |      | 9.5  |      | 7.3 |     |      |     |                                                                                      |          |                                                                                  |           |                 |     |     |     |   |                                                |          |                                                                                  |           |       |
| FVD2-5      |   |         |      |      |      |     |     |      |     |                                                                                      |          |                                                                                  |           |                 |     |     |     |   |                                                |          |                                                                                  |           |       |
| FVD2-6      |   | 6.4     | 12.0 | 26.6 | 11.0 |     |     |      |     |                                                                                      |          |                                                                                  |           |                 |     |     |     |   |                                                |          |                                                                                  |           |       |
| FVD2-8      |   | 8.4     |      |      |      |     |     |      |     |                                                                                      |          |                                                                                  |           |                 |     |     |     |   |                                                |          |                                                                                  |           |       |
| FVD2-10     |   | 10.5    | 13.6 | 30.3 | 13.9 |     |     |      |     |                                                                                      |          |                                                                                  |           |                 |     |     |     |   |                                                |          |                                                                                  |           |       |
| FVD2-14     |   | 15.0    | 27.0 | 44.3 | 21.2 |     |     |      |     |                                                                                      |          |                                                                                  |           |                 |     |     |     |   |                                                |          |                                                                                  |           |       |
| FVD2-20     |   | 21.0    |      |      |      |     |     |      |     |                                                                                      |          |                                                                                  |           |                 |     |     |     |   |                                                |          |                                                                                  |           |       |

注1) 本製品の中には多少納期を要するものもあります。

注2) FVD0.5-( )におけるUL登録の適用電線はAWG#26~AWG#22です。

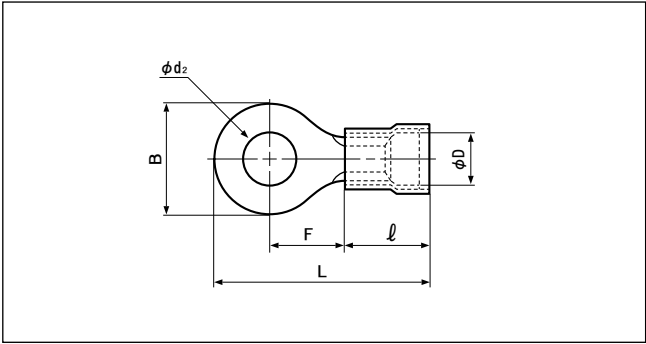

| 形 番       | 規 格                                                                                                                                                                     | 寸 法(mm) |      |      |      |      |     |     | 色 | 適用電線範圍                                      | 適用圧着工具    |                          |           | 1箱<br>入数<br>(個) |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|------|------|------|------|-----|-----|---|---------------------------------------------|-----------|--------------------------|-----------|-----------------|
|           |                                                                                                                                                                         | ød2     | B    | L    | F    | ℓ    | øD  | 板厚  |   | 撚線(mm <sup>2</sup> )                        | 手 動       | 空 気 圧 式                  | 油 圧 式     |                 |
| FVD5.5-3  |       | 3.2     | 9.5  | 27.0 | 8.3  | 14.0 | 6.5 | 1.0 | 黄 | 2.63~6.64<br>〔3.5 (AWG#12)<br>5.5 (AWG#10)〕 | YNT-1210S | YA-4<br>YAT-4A<br>YAD-4A | BCT-0514L | 500             |
| FVD5.5-S3 |       | 3.7     | 7.2  | 23.5 | 5.9  |      |     |     |   |                                             |           |                          |           |                 |
| FVD5.5-S4 |       | 4.3     | 9.5  | 27.0 | 8.3  |      |     |     |   |                                             |           |                          |           |                 |
| FVD5.5-4  |       | 5.3     |      |      |      |      |     |     |   |                                             |           |                          |           |                 |
| FVD5.5-5  |       | 6.4     | 12.0 | 33.0 | 13.0 |      |     |     |   |                                             |           |                          |           |                 |
| FVD5.5-S6 |       | 8.4     | 13.2 | 29.6 | 9.0  |      |     |     |   |                                             |           |                          |           |                 |
| FVD5.5-S8 |       |         | 15.0 | 35.2 | 13.7 |      |     |     |   |                                             |           |                          |           |                 |
| FVD5.5-8  |       |         |      |      |      |      |     |     |   |                                             |           |                          |           |                 |
| FVD5.5-10 |     | 10.5    |      |      |      |      |     |     |   |                                             |           |                          |           |                 |
| FVD5.5-14 |   | 15.0    | 32.0 | 55.3 | 25.3 |      |     |     |   |                                             |           |                          |           | 250             |
| FVD5.5-16 |   | 17.0    |      |      |      |      |     |     |   |                                             |           |                          |           |                 |
| FVD5.5-18 |   | 19.0    |      |      |      |      |     |     |   |                                             |           |                          |           |                 |
| FVD5.5-20 |   | 21.0    |      |      |      |      |     |     |   |                                             |           |                          |           |                 |

注) 本製品の中には多少納期を要するものもあります。