




SEC. B-B



SEC. C-C



SEC. A-A

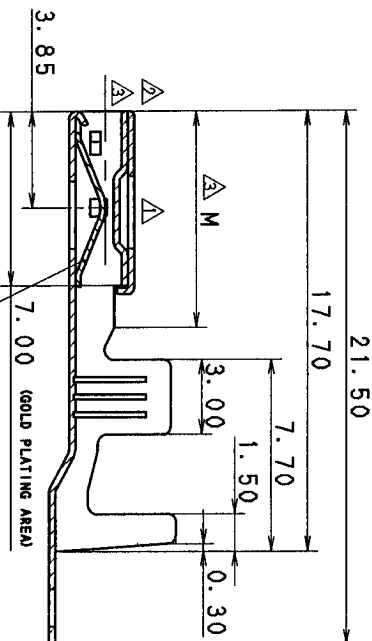

SPRING (GOLD PLATING : WHOLE SPRING)

YAZAKI PART NO.	K	L	M	APPLICABLE WIRE SIZE	TREATMENT
7116-1530.	3.30	5.50	7.70	AVS0.3~0.85 CAVUS0.5	TIN PLATING
7116-1530-08.				EQUIVALENT	GOLD PLATING
7116-1531	3.60	6.00	8.70	AVS1.25~2.00	TIN PLATING
7116-1531-08				EQUIVALENT	GOLD PLATING

注記
1. 材質
本体 : 黄銅 t=0.25
バネ : スプリング鋼 t=0.20

NOTES
1. MATERIAL
BODY : BRASS, t=0.25
SPRING : COPPER BERYLLIUM, t=0.20

97.07.30	ADDED WIRE SIZE	C97-7658	K. U	CUSTOMER		MATL.	SEE NOTES	TREAT.	ISSUE MARK
97.06.24	CHANGED FORM.	C97-M294	H. K	CUSTOMER PART NO.		SPEC.			
89.04.21	形状変更	C89-6612	矢野						
89.01.09	形状変更	C89-6068	T. N	OFFICE					
88.09.27	NEW	BMC-1230	S. K	VENDOR					
LET DATE	REVISION RECORD	NO.	CHKD	TRIAL PART NO.					
GENERAL TOLERANCE									
10MAX	50MAX	100MAX	250MAX	500VR	ANGLE	ECCENT	DWG TYPE	DWG SOURCE	DWG DATE
A ±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1	R	NEW	88.09.27
B ±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	APPROVED	CHECKED	DESIGN
C ±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15	承認	承認	KODAMA
SPECIFIED									
MASS 9									
97.08.26 97.08.20 97.08.09.27 97.07.01									
YAZAKI CORPORATION									