

Features


- Collector Current: $I_C=1A$
- Power Dissipation of 1.5W

Package Marking and Ordering Information

Product ID	Pack	Marking	Qty(PCS)
BCP5x	SOT-223	BCP5x	1000

x:From 4/5/6

SOT-223



Maxmim Ratings (Ta=25°C unless otherwise noted)

Parameter	Symbol	Limit	Unit
Collector-Base Voltage	V_{CBO}	BCP54 45	V
		BCP55 60	
		BCP56 100	
Collector-Emitter Voltage	V_{CEO}	BCP54 45	V
		BCP55 60	
		BCP56 80	
Emitter-Base Voltage	V_{EBO}	5	V
Collector Current	I_C	1	A
Collector Power Dissipation	P_C	1.5	W
Thermal Resistance From Junction To Ambient	$R_{\theta JA}$	83.3	°CW
Junction Temperature	T_j	150	°C
Storage Temperature	T_{stg}	-55~+150	°C









Classification Of h_{FE}

Rank	BCP54-10, BCP55-10, BCP56-10	BCP54-16, BCP55-16, BCP56-16
Range	63-160	100-250
Marking	BCP54-10, BCP55-10, BCP56-10	BCP54-16, BCP55-16, BCP56-16



Electrcal Charcteristics (Ta=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Max	Unit
Collector-base breakdown voltage	BCP54	$I_C = 0.1\text{mA}, I_E = 0$	45		V
	BCP55		60		
	BCP56		100		
Collector-emitter breakdown voltage	BCP54	$I_C = 10\text{mA}, I_B = 0$	45		V
	BCP55		60		
	BCP56		80		
Base-emitter breakdown voltage	$V_{(BR)EBO}$	$I_E = 10\mu\text{A}, I_C = 0$	5		V
Collector cut-off current	I_{CBO}	$V_{CB} = 30\text{V}, I_E = 0$		100	nA
DC current gain	$h_{FE(1)}$	$V_{CE} = 2\text{V}, I_C = 5\text{mA}$	25		
	$h_{FE(2)}$	$V_{CE} = 2\text{V}, I_C = 150\text{mA}$	63	250	
	$h_{FE(3)}$	$V_{CE} = 2\text{V}, I_C = 500\text{mA}$	25		
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = 500\text{mA}, I_B = 50\text{mA}$		0.5	V
Base-emitter voltage	V_{BE}	$V_{CE} = 2\text{V}, I_C = 500\text{mA}$		1	V
Transition frequency	f_T	$V_{CE} = 10\text{V}, I_C = 50\text{mA}, f = 100\text{MHz}$	100		MHz

Typical Characteristics

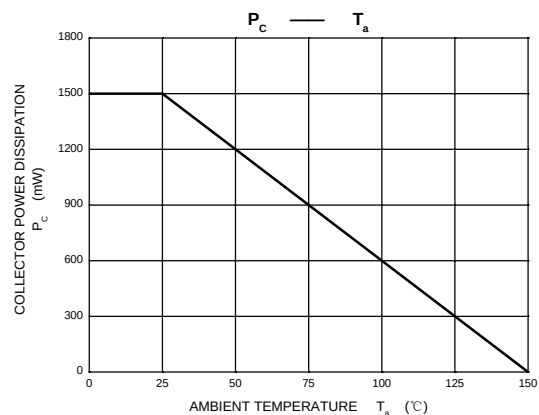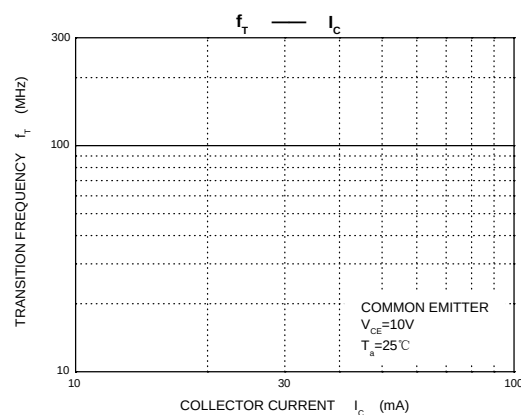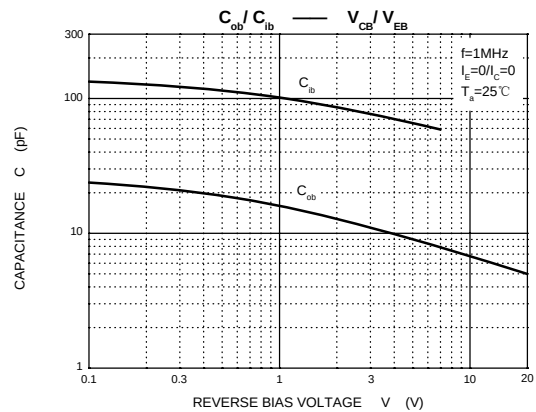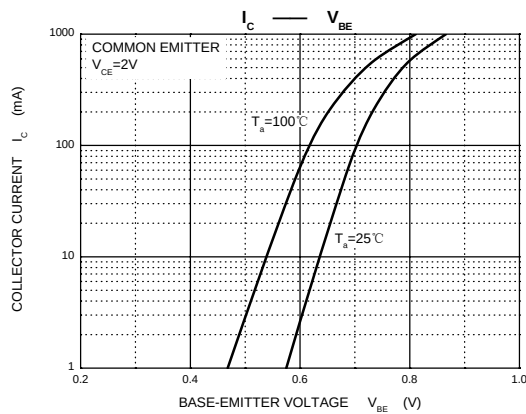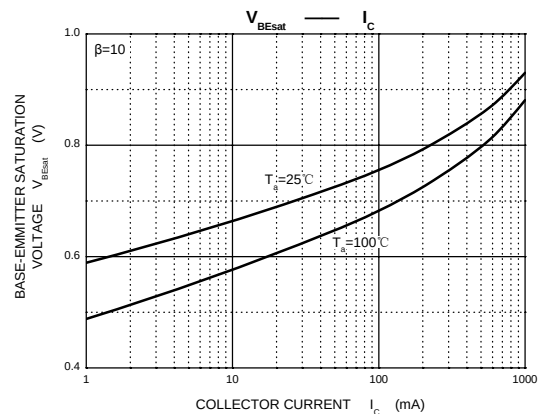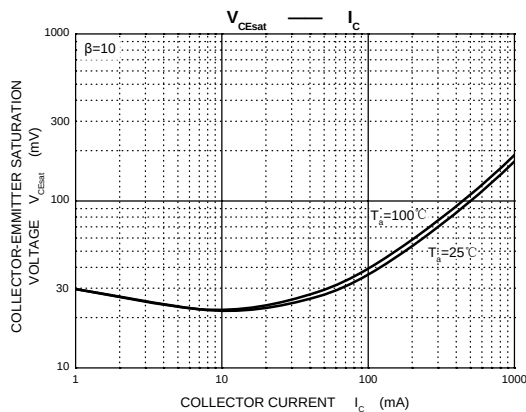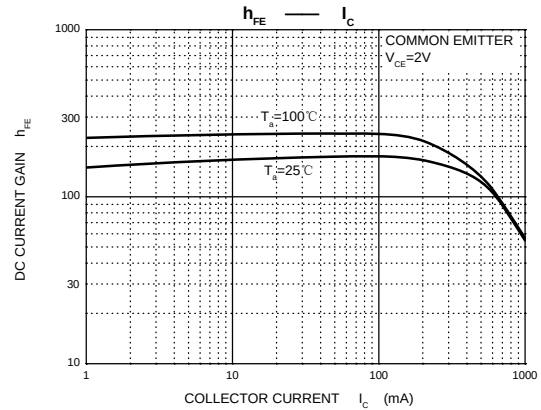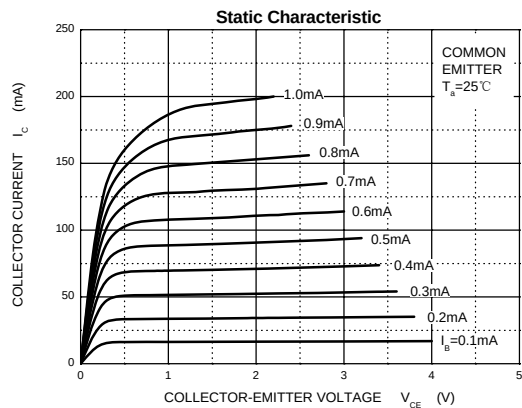

Package Dimensions SOT-223

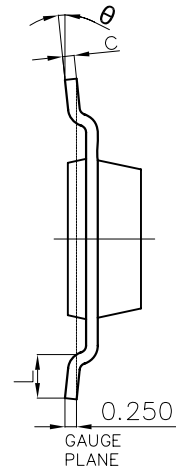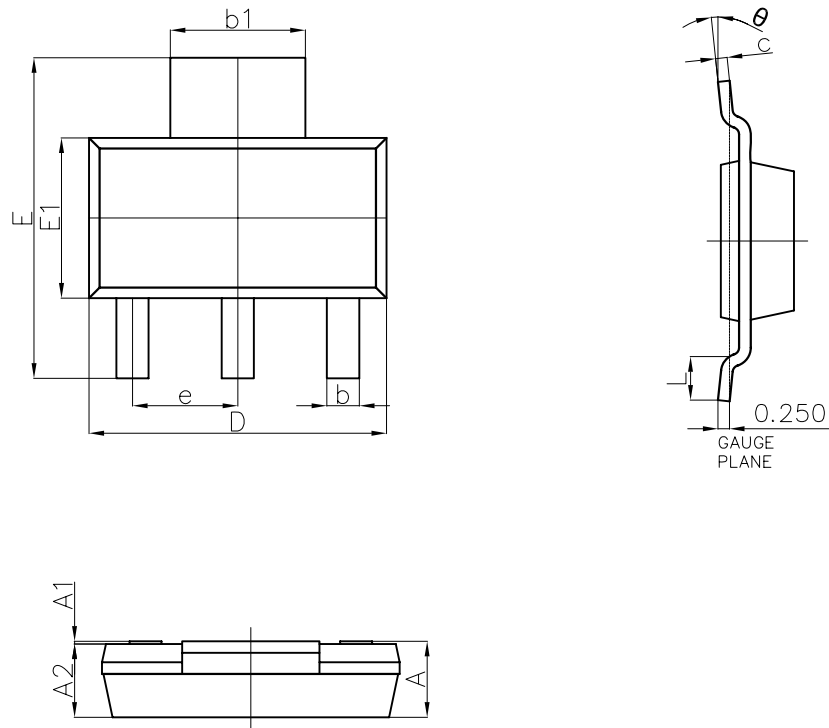

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	—	1.800	—	0.071
A1	0.020	0.100	0.001	0.004
A2	1.500	1.700	0.059	0.067
b	0.660	0.840	0.026	0.033
b1	2.900	3.100	0.114	0.122
c	0.230	0.350	0.009	0.014
D	6.300	6.700	0.248	0.264
E	6.700	7.300	0.264	0.287
E1	3.300	3.700	0.130	0.146
e	2.300(BSC)		0.091(BSC)	
L	0.750	—	0.030	—
θ	0°	10°	0°	10°