

Features

- ❑ Transient protection for high-speed data lines
 - IEC 61000-4-2 (ESD) $\pm 25\text{kV}$ (Air)
 - $\pm 20\text{kV}$ (Contact)
 - IEC 61000-4-4 (EFT) 40A (5/50 ns)
 - Cable Discharge Event (CDE)
- ❑ Package optimized for high-speed lines
- ❑ Ultra-small package (1.6mm × 0.8mm × 0.6mm)
- ❑ Protects one data, control or power line
- ❑ Low capacitance: 0.3pF (Typical)
- ❑ Low leakage current: 10nA @ V_{RWM} (Typical)
- ❑ Low clamping voltage
- ❑ Each I/O pin can withstand over 1000 ESD strikes for $\pm 8\text{kV}$ contact discharge
- ❑ ROHS compliant

Description

TT0501SDX is a low-capacitance Transient Voltage Suppressor (TVS) designed to provide electrostatic discharge (ESD) protection for high-speed data interfaces. With typical capacitance of 0.3 pF only, TT0501SDX is designed to protect parasitic-sensitive systems against over-voltage and over-current transient events. It complies with IEC 61000-4-2 (ESD), Level 4 ($\pm 15\text{kV}$ air, $\pm 8\text{kV}$ contact discharge), IEC 61000-4-4 (electrical fast transient - EFT) (40A, 5/50 ns), very fast charged device model (CDM) ESD and cable discharge event (CDE), etc.

TT0501SDX uses ultra-small SOD-523 package. Each TT0501SDX device can protect one high-speed data line. It offers system designers flexibility to protect single data line where space is a premium concern. The combined features of low capacitance, ultra-small size and high ESD robustness make TT0501SDX ideal for high-speed data port and high-frequency line (e.g., USB 2.0 & antenna line) applications, such as cellular phones and HD visual devices.

Applications

- ❑ Serial ATA
- ❑ PCI Express
- ❑ Desktops, Servers and Notebooks
- ❑ Cellular Phones
- ❑ MDDI Ports
- ❑ USB2.0/3.0 Power and Data Line Protection
- ❑ Display Ports
- ❑ Digital Visual Interfaces (DVI)
- ❑ HDMI 1.4/2.0


Mechanical Characteristics

- ❑ SOD-523 package
- ❑ Flammability Rating: UL 94V-0
- ❑ Marking: Part number
- ❑ Packaging: Tape and Reel

Circuit Diagram



Pin Configuration

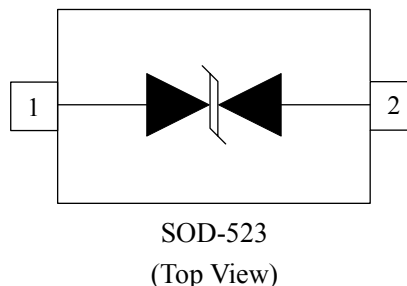


**Absolute Maximum Rating**

Symbol	Parameter	Value	Units
I_{PP}	Peak Pulse Current($t_p=8/20\mu s$)	5	A
V_{ESD}	ESD per IEC 61000-4-2(Air) ESD per IEC 61000-4-2 (Contact)	± 25 ± 20	kV
T_{OPT}	Operating Temperature	-55/+125	°C
T_{STG}	Storage Temperature	-55/+150	°C

Electrical Characteristics (T = 25°C)


Symbol	Parameter
V_{RWM}	Nominal Reverse Working Voltage
I_R	Reverse Leakage Current @ V_{RWM}
V_{BR}	Reverse Breakdown Voltage @ I_T
I_T	Test Current for Reverse Breakdown
V_C	Clamping Voltage @ I_{PP}
I_{PP}	Peak Pulse Current
C_{ESD}	Parasitic Capacitance
V_R	Reverse Voltage
f	Small Signal Frequency

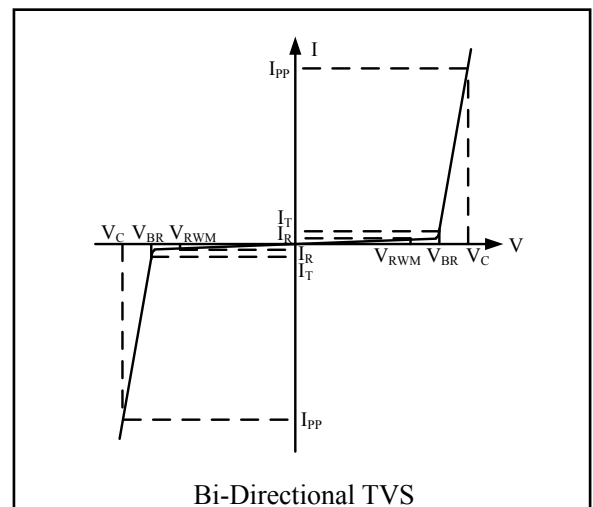


Symbol	Test Condition	Minimum	Typical	Maximum	Units
V_{RWM}				5.0	V
I_R	$V_{RWM} = 5V$, $T = 25^\circ C$ Between I/O and I/O		0.01	1.0	μA
V_{BR}	$I_T = 1mA$ Between I/O and I/O	7	8	9	V
V_C	$I_{PP} = 5A$, $t_p = 8/20\mu s$ Between I/O and I/O			14	V
C_{ESD}	$V_R = 0V$, $f = 1MHz$ Between I/O and I/O		0.3	0.40	pF



TLP Measurement of I/O to I/O

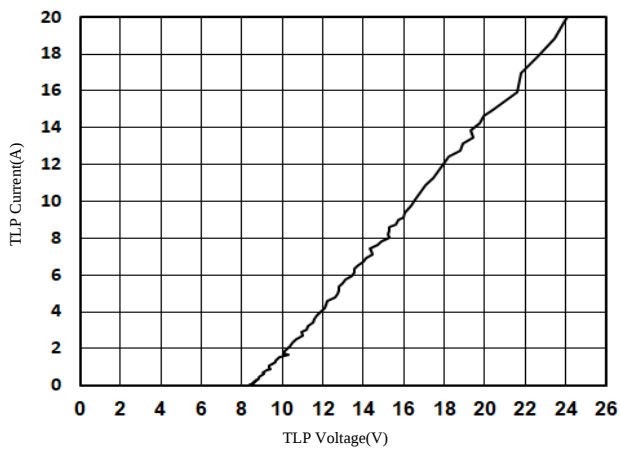


Insertion Loss S21 of I/O to I/O

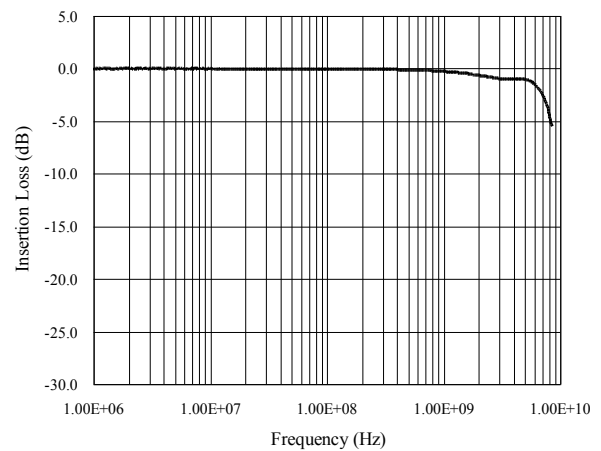


Capacitance vs. Voltage of I/O to I/O (f = 1MHz)


Capacitance vs. Reverse Voltage

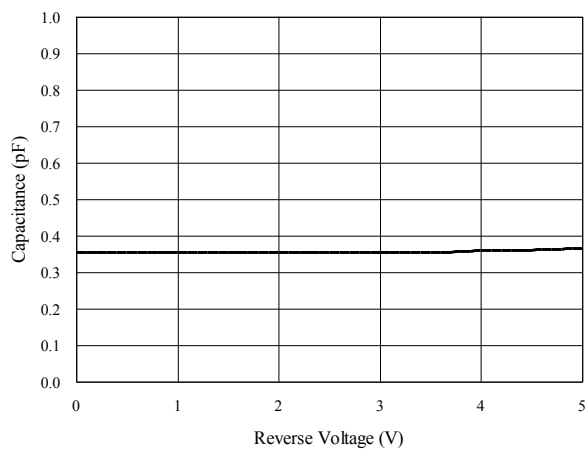


Normalized Capacitance vs. Reverse Voltage

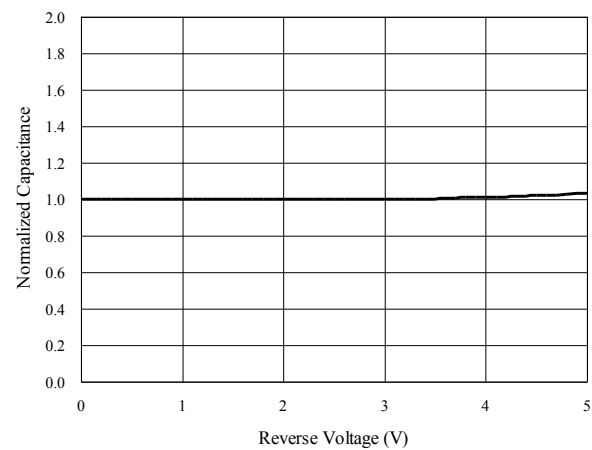

ESD Clamping of I/O to GND (+8kV Contact per IEC 61000-4-2)

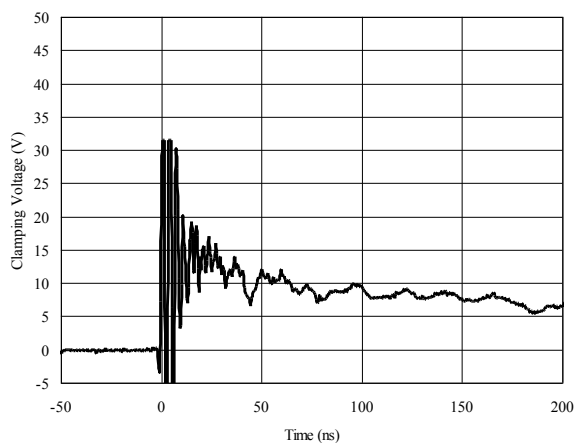


ESD Clamping of I/O to GND (-8kV Contact per IEC 61000-4-2)

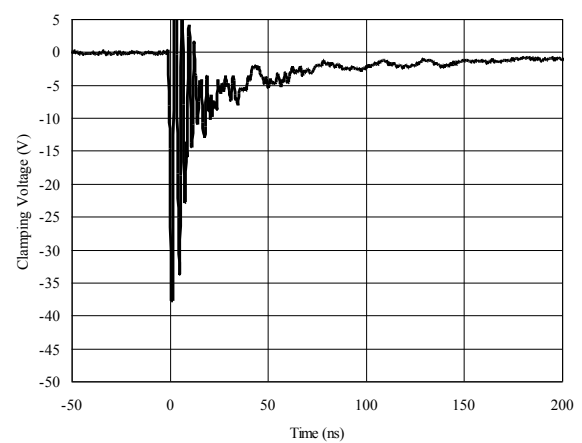





• Recommended condition of flow soldering

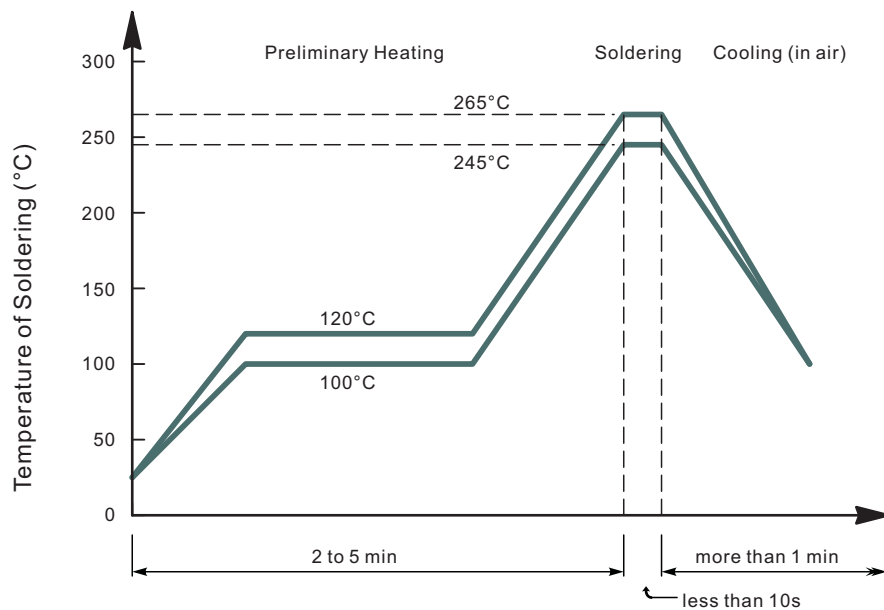

• Recommended condition of reflow soldering

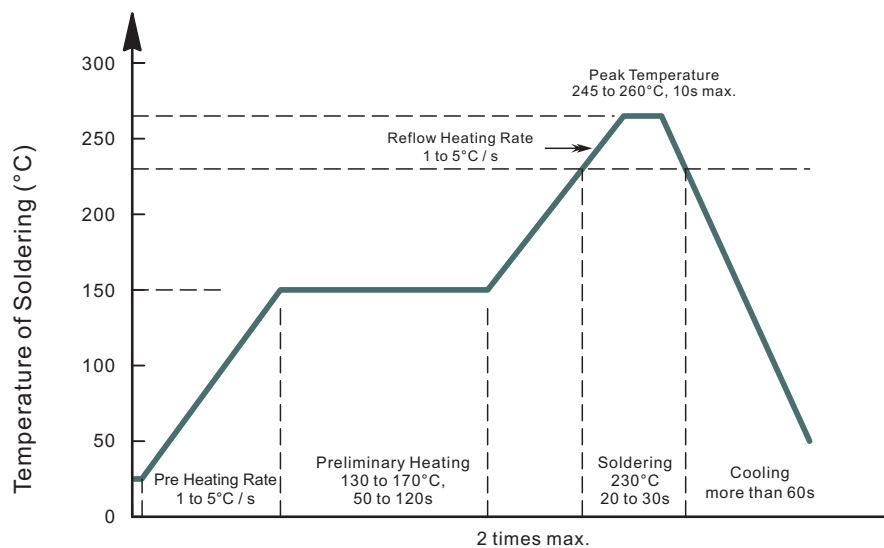

Tape and Reel Specification

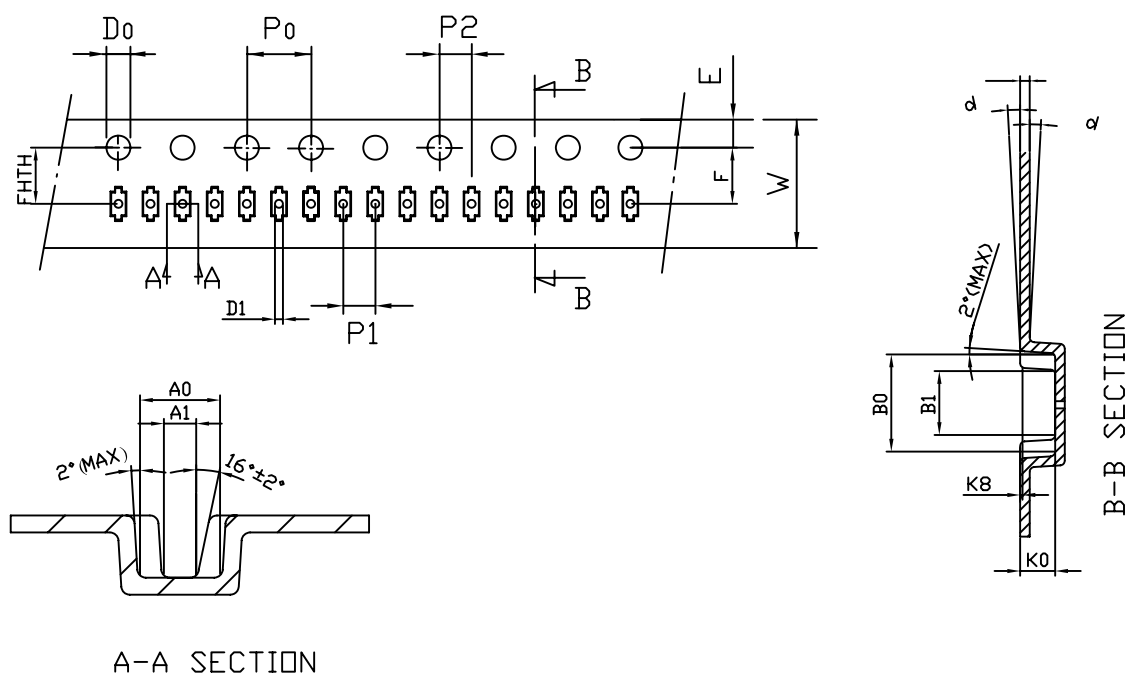


unit:mm

symbol	A0	B0	K0	P0	P1	P2	A1	T
Spec	0.90±0.05	1.95±0.05	0.73±0.05	4.0±0.10	2.0±0.05	2.0±0.05	0.39±0.05	0.20±0.02
symbol	E	F	D0	D1	B2	W	10P0	K8
Spec	1.75±0.10	3.50±0.05	1.50 ^{+0.10} ₋₀	0.50±0.05	1.40±0.05	8.0 ^{+0.3} _{-0.1}	40.0±0.10	0.15MAX
symbol	FHTH							
Spec	3.50±0.05							


Package Outline

- ☐ SOD-523 package
- ☐ 2 leads, very small package
- ☐ MSL-3

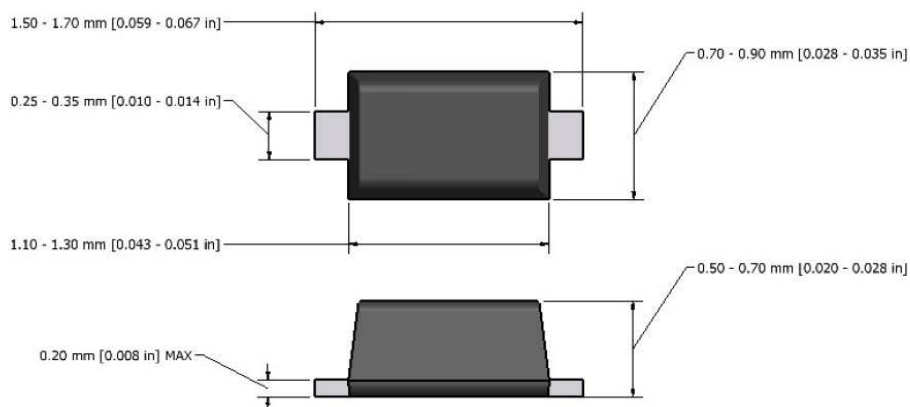

Note: Dimensions are exclusive of Burrs, Mold Flash & Tie Bar extrusions.

Marking Codes



Ordering Information

Part Number	Working Voltage	Quantity Per Reel	Reel Size
TT0501SDX	5V	3,000	7 Inch

Note:

- (1) "51S" is part number fixed.
- (2) no cathode line and date code.