


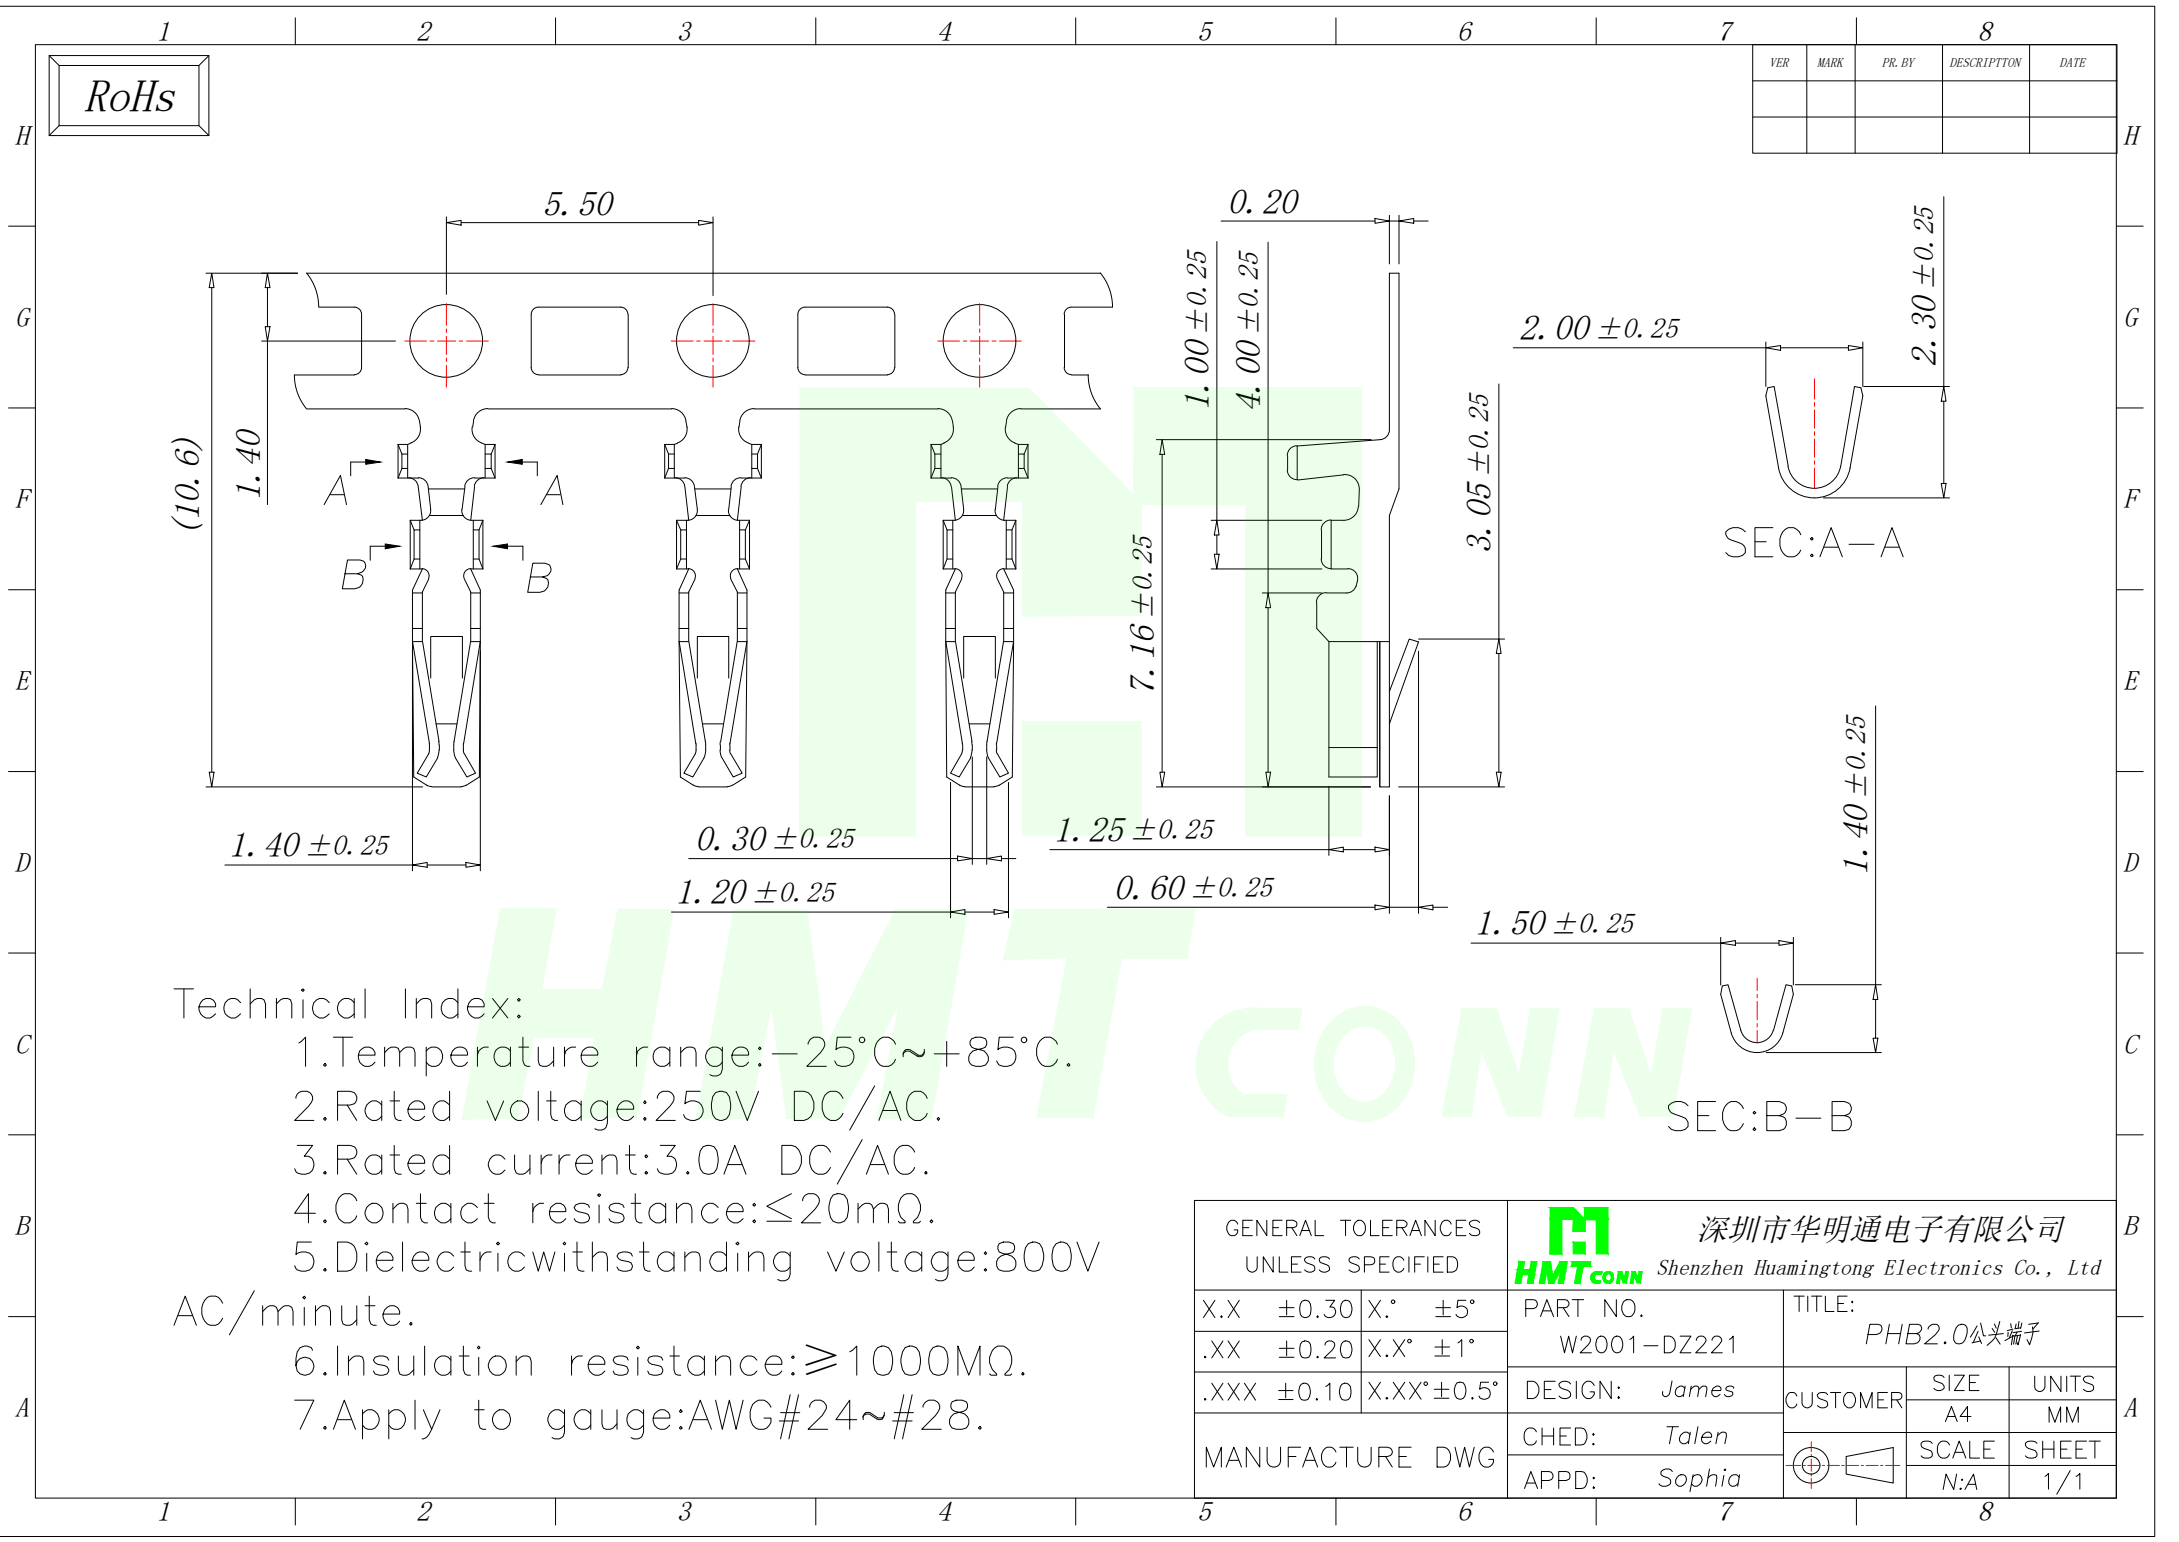

RoHs

VER	MARK	PR. BY	DESCRIPTION	DATE

Technical Index:

1. Temperature range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$.
2. Rated voltage: 250V DC/AC.
3. Rated current: 3.0A DC/AC.
4. Contact resistance: $\leq 20\text{m}\Omega$.
5. Dielectric withstanding voltage: 800V AC/minute.
6. Insulation resistance: $\geq 1000\text{M}\Omega$.
7. Apply to gauge: AWG#24~#28.

GENERAL TOLERANCES UNLESS SPECIFIED		 深圳市华明通电子有限公司 Shenzhen Huamingtong Electronics Co., Ltd			
X.X ±0.30	X.* ±5°	PART NO. W2001-DZ221	TITLE: PHB2.0公头端子		
.XX ±0.20	X.X* ±1°				
.XXX ±0.10	X.XX* ±0.5°	DESIGN: James	CUSTOMER	SIZE A4	UNITS MM
MANUFACTURE DWG		CHED: Talen		SCALE N:A	SHEET 1/1
		APPD: Sophia			