


MARKETING SALES DRAWING

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - [ ]


Electrical Testing per Tusonix standard test plans and Mil-Std-202 Test Methods.






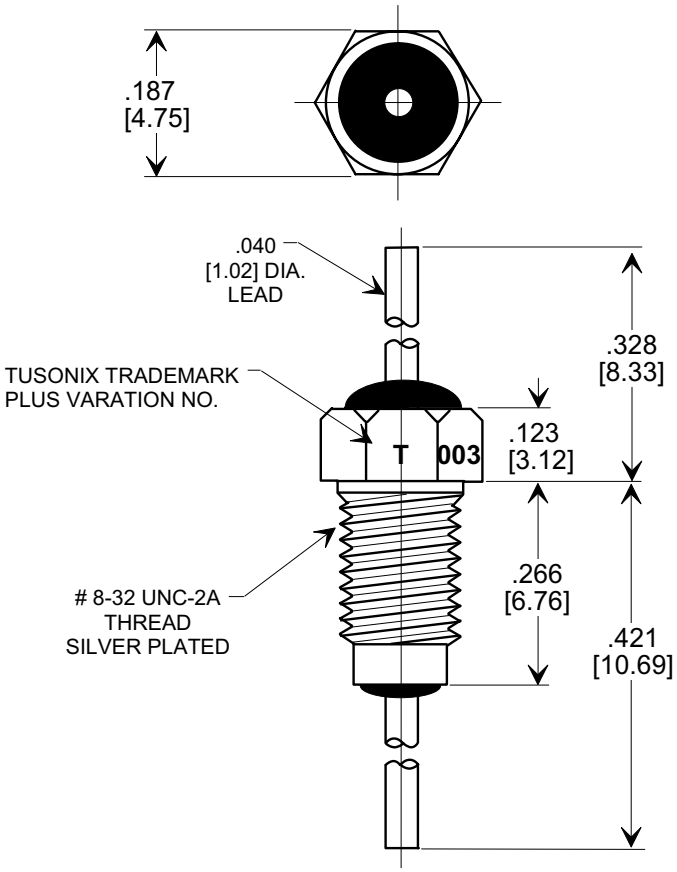

MOUNTING HARDWARE





NOTES:
1. TUSONIX STANDARD PART NUMBER: 4404-003.
   TUSONIX RoHS COMPLIANT PART NUMBER: 4404-003 LF.
   CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
2. PART MARKING: TRADEMARK AND VARIATION NUMBER.
   STANDARD PART: BLACK INK. RoHS PART: GREEN INK.
3. OPERATING TEMPERATURE RANGE: -55°C TO +125°C.
4. SILVER PLATED CASE AND MOUNTING HARDWARE, SILVER PLATED LEAD
5. NUT AND LOCKWASHER INCLUDED.
6. MAX. RECOMMENDED MOUNTING TORQUE: 2.0 Lb.-IN.
7. MAX. RECOMMENDED SOLDERING TEMPERATURE: 260°C. SEE INSTALLATION RECOMMENDATIONS.

100,000	100	10A	20	29	38	44	47	55	65
MIN. CAP.(pf)	125 ℃	DC CURRENT (AMPS)	1 MHz	3 MHz	10 MHz	30 MHz	100 MHz	300 MHz	1GHz
	DC WORKING VOLTAGE		MINIMUM NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD-220						

X-2015 Rev-0

REVISION RECORD

0	Original Release C.O. **950201-2**	
1	HARDWARE, NOTES & CAP CHART. S.M. 02-24-95	**RE-ISSUE 950201-2**
2	REVISED NOTES, ADDED PROJECTION & DECIMAL. S.M. 05-05-05	**20050428-2-02**

--TOLERANCES--
Unless Otherwise Specified
DECIMAL ±.031 [±0.79]
ANGLES ±

TUSONIX
TUCSON, ARIZONA

Title
BUSHING STYLE EMI FILTER

Drawn **S.M. 02-14-95**

Approved **O.S. 02-14-95**

A **4404-003**