

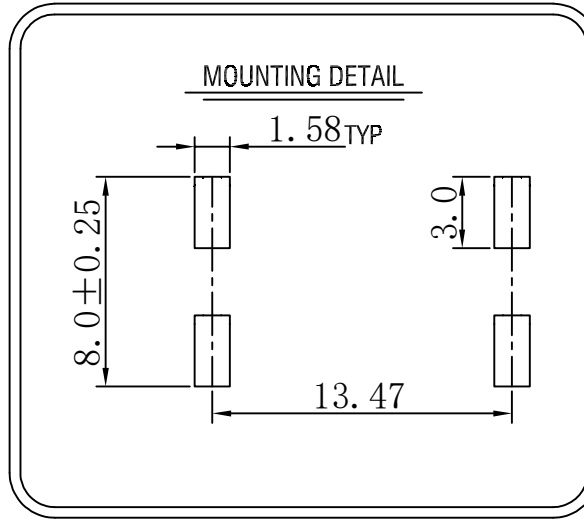
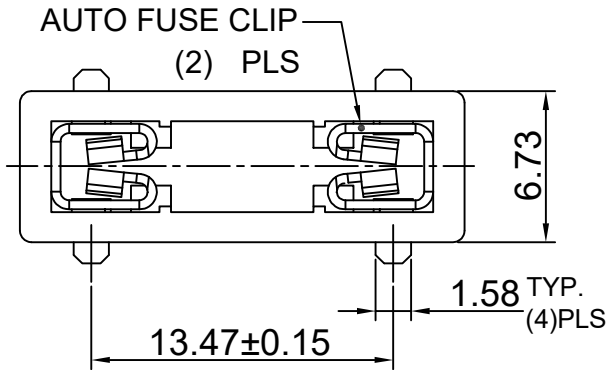


RoHS


REV	ECN NO.	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	更换图框			2024.04.17



SPECIFICATIONS
 Current Rating: 30 Amps @ 500V AC
 Temperature Rating: -40 °C to 125 °C
 Insulator: Nylon 6T , UL 94V-0
 Contacts: Brass,
 Finish: Tin plated over Nickel
 Fuse Size: Low profile mini automotive blade Fuses
 Standard automotive blade Fuses

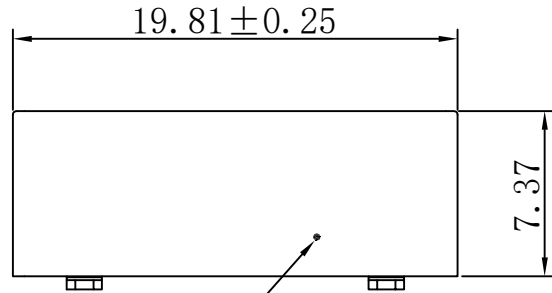

ACTUAL SIZE



X.±0.50	X.°±
.X±0.25	.X°±
.XX±0.15	.XX°±
.XXX±0.10	.XXX°±
UNITS:	mm

PART NO: XF-508PVS-A-B-R		XFCN 兴飞连接器		
TITLE: 二合一汽车插片保险丝座		0769-82001899		
		www.xfconn.com		
		DWG NO: /		
APPD	Chen ZhiQiang	VIEW		
CHKD	Liu Wei	SCALE	SHEET	REV
DRAW	Chen HongJiang	NONE	1/1	A1
DATE	2024.07.19			

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN